

PROTECTIVE BARRIERS



GUARD RAIL SYSTEMS



STEEL BOLLARDS




MACHINERY & RACK GUARDS



BARRICADES



RACK GUARDS



RETRACTABLE BARRIERS

Safety Sign Ideas V	250-251
Steel & Aluminum Safety Handrail V	252-253
Barriers V I	254-255
Web Barriers I R	255
Guard Rail Systems V I R	256-258
Safety Bollards V I	258-266
Low / High Rack & Machinery Guards V I	267-268
Delineators R	270
Barricades V I R	271
Column Protectors V R	271-273
Sign Bases and Stands I R	274
Rack Guards V I R	275-276
Corner Guards V I	277
Overhead Door Protectors V R	278-279
Retractable Barriers I R	281-282
Heavy Duty Swinging Traffic Doors R	284

SAFETY SIGN IDEAS



- (2) 120"L Rails
- (2) 42"H Posts
- Drop-In Style
- Powder Coat Finish

model YGR-LO-10-SI*



- Size: 96"L x 42"H x 21" Midrail
- Powder Coat Finish
- Sockets Sold Separately

model VDKR-8-SI



- Adhesive Floor Decal
- Decal Size: 30"W x 36"L
- Place in Front of Electrical Panels
- Custom artwork available

model SI-FD-10100



- Square Design
- Post Size: 4"
- Height: 42"
- Powder Coat Finish

model BOL-SQ-42-4-SI



- Post Size: 42"H x 4.5"D
- Chain Length: 127"
- Removable Chain
- Powder Coat Finish

model DCBB-42-4.5-SI



- (1) 48"L Drop-In Guard Rail
- (2) 18"H Posts
- Powder Coat Finish

model ST-GR-4-SI*



- Length: 48"
- Height: 9"
- Diameter 4"
- Powder Coat Finish

model LPRO-48-9-4-SI




- Height: 42"
- Inside Size: 10½"W x 10"D
- Powder Coat Finish

model CG-42-SI



- Aluminum Construction
- 96"L x 42"H x 21" Midrail
- Sockets Sold Separately

model ADKR-8-SI

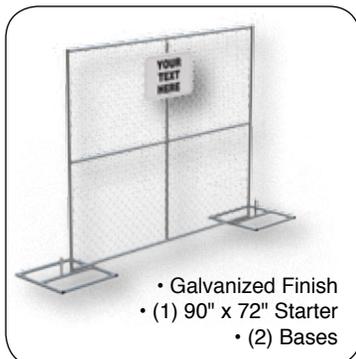

- Galvanized Finish
- (1) 90" x 72" Starter
- (2) Bases

model HRAIL-9072-SI*



- Adhesive Label
- Height: 42"
- Diameter: 5½"
- 10" Wheels

model BOL-MB-42-5.5-SI**



- Galvanized Finish
- Bolt-On Style
- (2) 96"L Rails
- (2) 42"H Posts

model GGR-B-8-SI*


- All signs are made of aluminum composite. Material is comprised of two pre-painted sheets of 0.130" aluminum with a solid polyethylene core. Ideal for both indoor and outdoor use.
- Signs measure 14½" wide by 10½" high.
- **Customize the sign text to meet your specification.**
- Signs are manufactured with ultraviolet inks and anti-graffiti coating.
- Each sign includes predrilled holes and self-tapping screws.

*Sold in bundles.

**Utilizes adhesive label.



model HPRO-M-36-36-2-SI

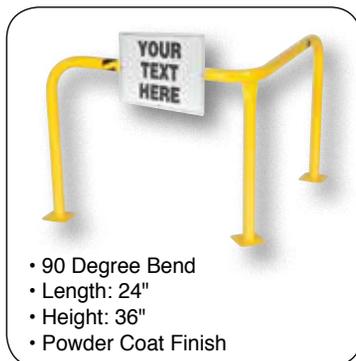

model TEGC-24-36-2-SI



model PRAIL-102-Y-SI



model JBOL-36-12-SI**



model HPRO-48-42-4-SI



model BCD-7636-OR-SI



model GR-D-8-PC-YEL-SI*



model SQ-72-SI



model BOL-42-4.5-SI**



model PREG-42-SI



model BOL-FD-36-Y-SI



model CGP-36-SI



STEEL SAFETY RAILING - series VDKR
shown with optional cast steel sockets which accepts toeboards



ALUMINUM SAFETY RAILING series ADKR
shown with optional cast steel sockets which accept toeboards




CONNECTOR KIT
Includes (2) male & (2) female connectors
model VDKR-CON



SINGLE & DOUBLE SOCKETS for surface mounting.
No toeboard feature.
series VDKR-W




SINGLE & DOUBLE SOCKETS for surface mounting. Sockets are 4" high and accepts wood for toeboards. series VDKR-P



BARRICADE BASE WITH FEET
model VDKR-BB-F




METAL SLEEVE is used for concrete mount. Measures 4"H x 2" O.D.
model VDKR-P107




3 or 4 FOOT GATE model VDKR-G3
model VDKR-G4
Hardware included




WALL MOUNT SOCKET
model VDKR-VM2



PERMANENT/PORTABLE BASE is designed to meet temporary floor edge and roof railing requirements. (OSHA 1926.500)
model VDKR-BASE



STEEL TOEBOARD fits between VDKR-P101 or VDKR-P102 handrail sockets and bolts to floor using existing/common anchor bolts. Toeboard is 4" high.
series VDKR-TB



Steel and Aluminum Safety Railings

Protect people from uneven walkways and mezzanine drop off's. Safety railings are available in 2 constructions, aluminum and steel. The steel models have a schedule 10 pipe construction while the aluminum models are made of schedule 40. Handrails are 42" high with a 21" mid-rail. Mounting options include: steel sockets, cast steel base, barricade base with feet or wheels, metal sleeves, wall mounted sockets or cast steel sockets for convenient handrail removal. The series VDKR-P sockets accept wood 2" x 4" or 2" x 6" when toe boards are required and two (2) lag down holes for permanently mounting the railing. Series VDKR has a yellow baked-in powder-coated toughness.

VDKR & ADKR series pipe railings satisfy federal OSHA requirements for standard guard rails in 29 CFR 1910.23.

	MODEL NUMBER	TOP RAIL HEIGHT	MIDRAIL HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
STEEL	VDKR-2	42"	21"	24"	1 5/8"	18
	VDKR-3	42"	21"	36"	1 5/8"	22
	VDKR-4	42"	21"	48"	1 5/8"	28
	VDKR-5	42"	21"	60"	1 5/8"	33
	VDKR-6	42"	21"	72"	1 5/8"	34
	VDKR-7	42"	21"	84"	1 5/8"	36
	VDKR-8	42"	21"	96"	1 5/8"	48
	ALUMINUM	ADKR-2	42"	21"	24"	1 5/8"
ADKR-3		42"	21"	36"	1 5/8"	10
ADKR-4		42"	21"	48"	1 5/8"	12
ADKR-5		42"	21"	60"	1 5/8"	13
ADKR-6		42"	21"	72"	1 5/8"	15
ADKR-7		42"	21"	84"	1 5/8"	16
ADKR-8		42"	21"	96"	1 5/8"	18

PIPE SAFETY RAILING OPTIONS

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
VDKR-W-101	STEEL SINGLE SOCKET (W/O TOEBOARDS)	5
VDKR-W-102	STEEL DOUBLE SOCKET (W/O TOEBOARDS)	7
VDKR-P101	CAST STEEL SINGLE SOCKET (ACCEPT TOEBOARDS)	6
VDKR-P102	CAST STEEL DOUBLE SOCKET (ACCEPT TOEBOARDS)	11
VDKR-BASE	CAST STEEL PERMANENT/PORTABLE BASE	127
VDKR-BASE-W	WELDED PERMANENT/PORTABLE BASE	128
VDKR-P107	4" METAL SLEEVE	1
VDKR-VM2	WALL MOUNT SOCKET (SOLD EACH)	6
VDKR-BB-F	BARRICADE BASE WITH FEET	6
VDKR-BB-W	BARRICADE BASE WITH WHEELS	7
VDKR-2-TB	2 FOOT LONG STEEL TOEBOARD	12
VDKR-3-TB	3 FOOT LONG STEEL TOEBOARD	15
VDKR-4-TB	4 FOOT LONG STEEL TOEBOARD	20
VDKR-5-TB	5 FOOT LONG STEEL TOEBOARD	22
VDKR-6-TB	6 FOOT LONG STEEL TOEBOARD	24
VDKR-7-TB	7 FOOT LONG STEEL TOEBOARD	51
VDKR-8-TB	8 FOOT LONG STEEL TOEBOARD	58
VDKR-G3	SAFETY RAILING GATE P-SHAPED 36" x 36"	23
VDKR-G3-B	SAFETY RAILING GATE GATE B-SHAPED 36" x 36"	37
VDKR-G4	SAFETY RAILING GATE GATE P-SHAPED 48" x 36"	37
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"	1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"	4
VDKR-CON	CONNECTOR KIT	3

Self-Closing Steel Gates (Adjustable Width)

Customize your safety railings with Self-Closing Steel Gates. Gates can be mounted from the left or right with the included mounting hardware. Mount to horizontal rails that measure up to 2" diameter and are spaced 10" to 21" apart center to center. Choose from galvanized or yellow powder coat finish. Meets OSHA 1910.23(a)(2) requirements. Works with handrail series VDKR and SQ. Railing sold separately.

MODEL NUMBER	MATERIAL	OPENING WIDTH	HEIGHT	WEIGHT (POUND)
SPG-26-Y	YELLOW	16" to 26"	12"	30
SPG-26-G	GALVANIZED	16" to 26"	12"	30
SPG-40-Y	YELLOW	24" to 40"	12 1/4"	30
SPG-40-G	GALVANIZED	24" to 40"	12 1/4"	30

Steel Square Safety Handrails

An economical way to protect people and machinery. Applications include: loading docks, floor openings, walkways, and mezzanines. Highly visible baked-in powder-coated toughness. Available with or without toeboards as application requires.

MODEL NUMBER	SQUARE TUBE (O.D.)	OVERALL HEIGHT	MID-RAIL HEIGHT	USABLE LENGTH	WEIGHT (POUND)
RIGID SECTION WITH TOEBOARD					
SQ-48-TB	1½"	42"	21 ³ / ₁₆ "	48"	60
SQ-60-TB	1½"	42"	21 ³ / ₁₆ "	60"	67
SQ-72-TB	1½"	42"	21 ³ / ₁₆ "	72"	86
SQ-84-TB	1½"	42"	21 ³ / ₁₆ "	84"	92
SQ-96-TB	1½"	42"	21 ³ / ₁₆ "	96"	98
SQ-108-TB	1½"	42"	21 ³ / ₁₆ "	108"	106
SQ-120-TB	1½"	42"	21 ³ / ₁₆ "	120"	168
RIGID SECTION WITHOUT TOEBOARD					
SQ-48	1½"	42"	21 ³ / ₁₆ "	48"	44
SQ-60	1½"	42"	21 ³ / ₁₆ "	60"	48
SQ-72	1½"	42"	21 ³ / ₁₆ "	72"	54
SQ-84	1½"	42"	21 ³ / ₁₆ "	84"	57
SQ-96	1½"	42"	21 ³ / ₁₆ "	96"	60
SQ-108	1½"	42"	21 ³ / ₁₆ "	108"	65
SQ-120	1½"	42"	21 ³ / ₁₆ "	120"	69
OPTIONAL WIRE MESH (bolted on)					
WM-48	--	22"	--	48"	22
WM-60	--	22"	--	60"	25
WM-72	--	22"	--	72"	28
WM-84	--	22"	--	84"	32
WM-96	--	22"	--	96"	36
WM-108	--	22"	--	108"	41
WM-120	--	22"	--	120"	43
OPTIONAL CONNECTION TUBING (†)					
CSEC-48	1¼"	--	--	47 ⁷ / ₈ "	14/PR.
CSEC-60	1¼"	--	--	59 ⁷ / ₈ "	15/PR.
CSEC-72	1¼"	--	--	71 ⁷ / ₈ "	18/PR.
CSEC-84	1¼"	--	--	83 ⁷ / ₈ "	20/PR.
CSEC-96	1¼"	--	--	95 ⁷ / ₈ "	32/PR.
CSEC-108	1¼"	--	--	107 ⁷ / ₈ "	40/EA.
CSEC-120	1¼"	--	--	119 ⁷ / ₈ "	43/EA.
OPTIONAL 4" HIGH TOEBOARD					
TOE-B-48-N	--	4"	--	43"	9
TOE-B-60-N	--	4"	--	55"	12
TOE-B-72-N	--	4"	--	67"	16
TOE-B-84-N	--	4"	--	79"	19
TOE-B-96-N	--	4"	--	91"	22
TOE-B-108-N*	--	4"	--	99½"	30
TOE-B-120-N**	--	4"	--	111½"	38
OPTIONS					
C-CON	CORNER CONNECTORS SOLD AND PRICED/PAIR				10
S-GATE-60	60" SLIDING GATE				83
SQ-CAP	PLASTIC BLACK END CAP 1½" x 1½"				1
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"				4



*RECEIVE (2) PIECES 49¾" LONG EACH / **RECEIVE (2) PIECES 55¾" LONG EACH

Mezzanine Safety Gates

Mezzanine Safety Gates provide an OSHA required 42" high handrail, 21" high mid-rail, and 4" high toe board for mezzanines without sacrificing load accessibility. To accommodate the maximum load height of 68", when utilizing a standard 48"W x 48"D pallet (two standard, side by side pallets for models MEZZ-200-DW), load positioning within the gate is critical. For greatest amount of clearance and item placement flexibility, shorter loads are recommended. Gate design is balanced to allow for easy operation without use of springs. Baked-in powder-coated toughness. Welded steel construction.

MODEL NUMBER	OVERALL HEIGHT	OVERALL WIDTH	OVERALL DEPTH	USABLE WIDTH	WEIGHT (POUND)
MEZZ-200*	80 ¹ / ₁₆ "	68½"	79 ⁵ / ₁₆ "	56"	215
MEZZ-200-SS	80 ¹ / ₁₆ "	68½"	79 ⁵ / ₁₆ "	56"	215
MEZZ-200-DW*	80 ¹ / ₁₆ "	108½"	79 ⁵ / ₁₆ "	96"	284
MEZZ-200-DW-SS	80 ¹ / ₁₆ "	108½"	79 ⁵ / ₁₆ "	96"	284
M-BUMP	72"L x 10"H POLY WALL GUARD/SURFACE BUMPER HARDWARE INCLUDED				27

*BAKED-IN POWDER-COATED TOUGHNESS / SS = STAINLESS STEEL CONSTRUCTION

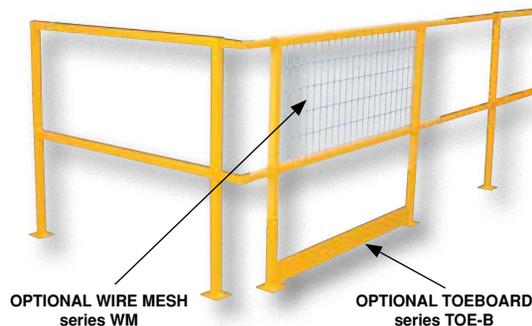



model PRAIL-102-G-WF

CA Residents see WARNING A, Pg. 459



48 Hours to Ship



model PRAIL-102-HD-Y

POWDER COATED TOUGH



CURVED FEET FLAT FEET WHEELS



model PRAIL-CT-1




model PBAR-72-Y


48 Hours to Ship



model PBAR-72-O



model PBAR-72-W



model PHR-R

48 Hours to Ship



model PHR-W

Crowd Control Interlocking Barriers

Attractive and functional design ideal for directing personnel. Interlocking portable railing has many commercial and industrial applications. Easy to move to meet changing needs. Upright bars are vertically spaced at 5 7/8" intervals for the light-weight style barriers and 5 3/4" for the heavy-duty style. Each railing includes connectors to attach multiple units together to form long runs. Overall size is 102"L x 40"H. Feet are removable so railing will lay flat for shipping and storage. Variety of foot styles available. Rugged welded steel construction.

MODEL NUMBER	STYLE	RAIL DIAMETER	FOOT STYLE	WEIGHT (POUND)
GALVANIZED FINISH				
PRAIL-102-G	LIGHT-WEIGHT	1 1/4"	BOTH CURVED	85
PRAIL-102-G-WW	LIGHT-WEIGHT	1 1/4"	BOTH WHEELS	85
PRAIL-102-G-FF	LIGHT-WEIGHT	1 1/4"	BOTH FLAT	85
PRAIL-102-G-WF	LIGHT-WEIGHT	1 1/4"	(1) WHEEL, (1) FLAT	85
PRAIL-102-G-W	LIGHT-WEIGHT	1 1/4"	(1) WHEEL, (1) CURVED	85
PRAIL-102-HD-G	HEAVY-DUTY	1 5/8"	BOTH CURVED	105
PRAIL-102-HD-G-WW	HEAVY-DUTY	1 5/8"	BOTH WHEELS	105
PRAIL-102-HD-G-FF	HEAVY-DUTY	1 5/8"	BOTH FLAT	105
PRAIL-102-HD-G-WF	HEAVY-DUTY	1 5/8"	(1) WHEEL, (1) FLAT	105
PRAIL-102-HD-G-W	HEAVY-DUTY	1 5/8"	(1) WHEEL, (1) CURVED	105
POWDER COAT SAFETY YELLOW FINISH				
PRAIL-102-Y	LIGHT-WEIGHT	1 1/4"	BOTH CURVED	85
PRAIL-102-Y-WW	LIGHT-WEIGHT	1 1/4"	BOTH WHEELS	85
PRAIL-102-Y-FF	LIGHT-WEIGHT	1 1/4"	BOTH FLAT	85
PRAIL-102-Y-WF	LIGHT-WEIGHT	1 1/4"	(1) WHEEL, (1) FLAT	85
PRAIL-102-Y-W	LIGHT-WEIGHT	1 1/4"	(1) WHEEL, (1) CURVED	85
PRAIL-102-HD-Y	HEAVY-DUTY	1 5/8"	BOTH CURVED	105
PRAIL-102-HD-Y-WW	HEAVY-DUTY	1 5/8"	BOTH WHEELS	105
PRAIL-102-HD-Y-FF	HEAVY-DUTY	1 5/8"	BOTH FLAT	105
PRAIL-102-HD-Y-WF	HEAVY-DUTY	1 5/8"	(1) WHEEL, (1) FLAT	105
PRAIL-102-HD-Y-W	HEAVY-DUTY	1 5/8"	(1) WHEEL, (1) CURVED	105
STAINLESS STEEL TYPE 304 FINISH				
PRAIL-102-SS	LIGHT-WEIGHT	1 1/4"	BOTH CURVED	85
PRAIL-102-HD-SS	HEAVY-DUTY	1 5/8"	BOTH CURVED	105

Crowd Control Barriers Cart

A railing cart is a great addition to entertainment and recreational facilities. Designed with upper and lower arms to enable the rails to be transported with efficiency and minimal personnel. An extended towing arm is placed at the front of the unit for push/pull maneuvering. The unit rolls smoothly on casters while traversing locations. Built in fork pockets 7 13/16"W x 2 1/2"H usable on 32 13/16" centers allow the unit to be transferred and maneuvered with the use of the fork truck.

MODEL NUMBER	OVERALL SIZE (W x H)	USABLE SIZE (W x H)	CAPACITY (POUND)	WEIGHT (POUND)
PRAIL-CT-1	52 1/2" x 89 3/4"	48 1/2" x 77 13/16"	3,500	264

Plastic Barriers

Portable Barriers with removable base feet. Manufactured from virgin HDPE material and includes UV stabilizers for longer life. Reflective tape provides better identification at night. The black recycled rubber base feet are 23" long and are weighted for stability.

MODEL NUMBER	LENGTH	HEIGHT	COLOR	WEIGHT (POUND)
PBAR-72-Y	79"	40"	YELLOW	69
PBAR-72-O	79"	40"	ORANGE	69
PBAR-72-W	79"	40"	WHITE	69

Plastic Interlocking Barriers

Plastic Interlocking Barriers will not rust and will retain attractive appearance. Reflective tape provides better identification at night. Barrier ends include connectors for interlocking multiple units. Base feet are 15 1/2"L x 3"W. The non-removable feet come pre-filled with sand for weight ballast. Feet can be rotated 90° to allow for barriers to be stacked. Manufactured from HDPE material and includes UV stabilizer for longer life. Ships and stores assembled.

MODEL NUMBER	OVERALL SIZE (L x H)	THICKNESS	BARRIER COLOR	WEIGHT (POUND)
PHR-Y	59" x 40"	2 1/2"	YELLOW	52
PHR-Y-L	79" x 40"	2 1/2"	YELLOW	58
PHR-R	59" x 40"	2 1/2"	RED	52
PHR-R-L	79" x 40"	2 1/2"	RED	58
PHR-W	64" x 40"	2 1/2"	WHITE	56

Semi-Permanent Barriers

These attractive, durable barriers have a powder coat finish provides long life without fading or cracking. Each rail section includes brackets and hardware for connecting to post. Each post can be used to install two straight rails or a 90° configuration. Posts are held in place by pre-drilled, heavy-duty black molded rubber base. Overall size of post base is 11¾"W x 15¾"D. Concrete mounting hardware is included with each post base. Railing height when mounted is 36". Railing and posts sold separately.

MODEL NUMBER	DESCRIPTION	DIMENSIONS	COLOR	WEIGHT (POUND)
SPR-120-W	RAILING	120"L	WHITE	93
SPR-120-Y	RAILING	120"L	YELLOW	93
SPR-POST-W	POST WITH BASE	39"H	WHITE	39
SPR-POST-Y	POST WITH BASE	39"H	YELLOW	39



Indoor Personnel Guidance Barriers

Keep lines flowing smoothly with economical personnel guidance barriers. Perfect for restaurants, offices, hospitals, schools, and banks. Ideal for indoor applications.

Wall Mounted Barrier, model WEB-W includes yellow fabric web. The self-retracting web extends up to 72". Web end will attach to wall-mounted receiver or another floor-mounted barrier. Available in 15' length, **model WEB-W-15**.

Classic Tensabarrier® Web Barrier, series TSB is seen around the world in various businesses and airports. Standard is a black belt but many belt colors and designs available, contact factory for pricing.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
WEB-P	40"H POST W/WEB & SELF-REELING TOP, 6' LONG	18
WEB-W	WALL MOUNT UNIT WITH RECEPTACLE, 6' LONG	3
WEB-W-15	WALL MOUNT UNIT WITH RECEPTACLE, 15' LONG	3
TSB-7M	13½"D METAL BASE - 7'6"L x 40"H	30
TSB-13M	13½"D METAL BASE - 13'L x 40"H	30
TSB-NBM	13½"D METAL BASE - NO BELT/ 40" POST ONLY	30
TSB-7B	13½"D BLACK BASE - 7'6"L x 40"H	30
TSB-13B	13½"D BLACK BASE - 13'L x 40"H	30
TSB-NBB	13½"D BLACK BASE - NO BELT/ 40" POST ONLY	30



Web Barrier Stakes

The unique barrier head design with spring loaded retractable tape allows for quick set up and easy storage. These stakes are very versatile, leaving you the option of direct ground insertion with the spiked end or using the weighted base for use on hard surfaces. The stake has a telescoping function that extended to 42". Bases can be filled with 18 lbs. of water or 30 lbs. of sand in order to weigh them down. Model WBS-WALL (Wall Mount Kit) includes: head wall mount, wall receiver, six (6) wood screws, six (6) wall anchors, and four (4) zip ties.

WBS-CART-Y (Cart Package) includes: five (5) stakes, five (5) bases, and five (5) "CAUTION" reels. Parts sold individually.

MODEL NUMBER	DESCRIPTION	DIMENSIONS	WEIGHT (POUND)
WBS-42	STAKE (Telescopic)	2-3/8" DIA. x 22" to 42"H	4
WBS-14-BASE	BASE	15" DIA. x 4¾"H	4
WBS-CAUTION	REEL, CAUTION	15' LONG	2
WBS-4RH	(4) SLOT HEAD RECEIVER		1
WBS-WALL	WALL MOUNT KIT		1
WBS-CART-Y	CART PACKAGE		71



Plastic Chain Barricades

Portable and lightweight units are easy to position where needed most. Chain simply snaps onto post hooks (two (2) hooks per post). Three standard colors to choose from. Units are easy to assemble with snap-together parts. Posts are sold four (4) to a box. Chains sold in rolls (each).

MODEL NUMBER	DESCRIPTION	COLOR	DIAMETER	HEIGHT	WEIGHT (POUND)
PCB-W-F	FLOOR MOUNTED POST	WHITE	2½"	38½"	12
PCB-Y-F	FLOOR MOUNTED POST	YELLOW	2½"	38½"	12
PCB-B-F	FLOOR MOUNTED POST	BLACK	2½"	38½"	12
PCB-W-G	GROUND STAKE POST	WHITE	2½"	35"	10
PCB-Y-G	GROUND STAKE POST	YELLOW	2½"	35"	10
PCB-B-G	GROUND STAKE POST	BLACK	2½"	35"	10
PCB-W-CN	PLASTIC CHAIN	WHITE	2" x 1¼"	590"	8
PCB-Y-CN	PLASTIC CHAIN	YELLOW	2" x 1¼"	590"	8
PCB-B-CN	PLASTIC CHAIN	BLACK	2" x 1¼"	590"	8





series GR



48 Hours to Ship

CA Residents see WARNING A, Pg. 459



ADJUSTABLE GUARD RAIL BRACKET series GR-TP-ADJBKT

Adjustable from 0 to 90°. Attaches to any standard GR-TP.




TUBULAR POST model GR-TP42




Shown with Galvanized Guard Rail and Plastic End Caps

SPRING POST model GR-SP



series GR-PC-YEL

POWDER COATED TOUGH



PLASTIC END CAP model GR-CAP (Adds 3" to length)



ANCHOR BOLTS model AS-344-4PK



series GR-CRV



FLARED END GUARD model GR-TG



BUFFER END GUARD model GR-BG

The above two End Guards are bolted onto our Galvanized Guard Rail. Rail mounting hardware is included.

Guard Rail Systems

Protect personnel and equipment both visually and physically with our Guard Rail Systems. These economical systems can be utilized indoors or outdoors. Ideal for protecting corners of buildings and machinery from fork truck and vehicle damage. Choose between one, two, or three high rail systems. Tubular posts are machined for continuous or perpendicular rail mounting. GR series has rail slotted mounting holes 3/4" x 2 1/2" provided, mounting hardware not included. Floor mounting kit sold separately. Deduct 5" when overlapping on a shared post. Units are rated for 4,000 pounds at 4 mph.

MODEL NUMBER	HEIGHT	LENGTH	MOUNTING POSTS REQUIRED	RADIUS	WEIGHT (POUND)
GALVANIZED GUARD RAIL - STRAIGHT RAILS					
GR-3	12"	36"	2	--	20
GR-4	12"	48"	2	--	30
GR-5	12"	60"	2	--	41
GR-6	12"	72"	2	--	47
GR-7	12"	84"	2	--	76
GR-8	12"	96"	2	--	78
GR-9	12"	108"	3	--	86
GR-10	12"	120"	3	--	104
GR-11	12"	132"	3	--	112
GR-12	12"	144"	3	--	120
GALVANIZED GUARD RAIL includes drop-in style brackets and hardware					
GR-D-3	12 ¹³ / ₁₆ "	38 ²³ / ₃₂ "	2	--	35
GR-D-4	12 ¹³ / ₁₆ "	50 ²³ / ₃₂ "	2	--	48
GR-D-5	12 ¹³ / ₁₆ "	62 ²³ / ₃₂ "	2	--	58
GR-D-6	12 ¹³ / ₁₆ "	74 ²³ / ₃₂ "	2	--	65
GR-D-7	12 ¹³ / ₁₆ "	86 ²³ / ₃₂ "	2	--	86
GR-D-8	12 ¹³ / ₁₆ "	98 ²³ / ₃₂ "	2	--	88
GR-D-9	12 ¹³ / ₁₆ "	110 ²³ / ₃₂ "	3	--	90
GR-D-10	12 ¹³ / ₁₆ "	112 ²³ / ₃₂ "	3	--	123
GR-D-11	12 ¹³ / ₁₆ "	134 ²³ / ₃₂ "	3	--	133
GR-D-12	12 ¹³ / ₁₆ "	146 ²³ / ₃₂ "	3	--	135
POWDER COAT GUARD RAIL - STRAIGHT RAILS					
GR-3-PC-YEL	12"	36"	2	--	20
GR-4-PC-YEL	12"	48"	2	--	30
GR-5-PC-YEL	12"	60"	2	--	41
GR-6-PC-YEL	12"	72"	2	--	47
GR-7-PC-YEL	12"	84"	2	--	76
GR-8-PC-YEL	12"	96"	2	--	56
GR-9-PC-YEL	12"	108"	3	--	70
GR-10-PC-YEL	12"	120"	3	--	76
GR-11-PC-YEL	12"	132"	3	--	96
GR-12-PC-YEL	12"	144"	3	--	118
POWDER COAT GUARD RAIL includes drop-in style brackets and hardware					
GR-D-3-PC-YEL	12 ¹³ / ₁₆ "	38 ²³ / ₃₂ "	2	--	35
GR-D-4-PC-YEL	12 ¹³ / ₁₆ "	50 ²³ / ₃₂ "	2	--	48
GR-D-5-PC-YEL	12 ¹³ / ₁₆ "	62 ²³ / ₃₂ "	2	--	58
GR-D-6-PC-YEL	12 ¹³ / ₁₆ "	74 ²³ / ₃₂ "	2	--	65
GR-D-7-PC-YEL	12 ¹³ / ₁₆ "	86 ²³ / ₃₂ "	2	--	86
GR-D-8-PC-YEL	12 ¹³ / ₁₆ "	98 ²³ / ₃₂ "	2	--	88
GR-D-9-PC-YEL	12 ¹³ / ₁₆ "	110 ²³ / ₃₂ "	3	--	90
GR-D-10-PC-YEL	12 ¹³ / ₁₆ "	112 ²³ / ₃₂ "	3	--	123
GR-D-11-PC-YEL	12 ¹³ / ₁₆ "	134 ²³ / ₃₂ "	3	--	133
GR-D-12-PC-YEL	12 ¹³ / ₁₆ "	146 ²³ / ₃₂ "	3	--	135
GALVANIZED GUARD RAIL - CURVED RAILS 90°					
GR-4-CRV	12"	48"	2	30 1/2"	32
GR-6-CRV	12"	72"	2	46"	55
GR-8-CRV	12"	96"	2	61"	69
GR-10-CRV	12"	120"	3	75 1/2"	85
GR-12-CRV	12"	144"	3	91 1/2"	122
GUARD RAIL OPTIONS					
GR-SP	SPRING POST - 24" HIGH - (1 guard rail level)				19
GR-TP18	TUBULAR POST - 5"W x 5L x 18"H (10" x 10" base plate) (1 guard rail level)				27
GR-TP42	TUBULAR POST - 5"W x 5L x 42"H (10" x 10" base plate) (2 guard rail level)				57
GR-TP60	TUBULAR POST - 5"W x 5L x 60"H (10" x 10" base plate) (3 guard rail level)				71
GR-TP72	TUBULAR POST - 5"W x 5L x 72"H (10" x 10" base plate) (3 guard rail level)				85
GR-CAP	PLASTIC END CAP YELLOW 7"W x 13 1/2"H x 4"D				5
GR-CAP-G	PLASTIC END CAP GRAY 7"W x 13 1/2"H x 4"D				5
GR-BG	BUFFER END GUARD 25 7/8"L x 16"H x 12 1/2"D (Adds 11-7/8")				24
GR-TG	FLARED END GUARD 28 7/8"L x 16 1/8"H x 9 7/8"D (Adds 16-1/8"L)				20
GR-TP-ADJBKT	ADJUSTABLE MOUNTING BRACKET (Adds 1 7/8" to projection)				7
GR-BKT-DI	ONE POST MOUNTING BRACKET GR-D series (ADDITIONALLY)				9
GR-BKT-CS-DI	ONE CENTER SUPPORT BRACKET GR-D series 10, 11 & 12 FT. RAIL (ADD'L)				9
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4

Structural Guard Rails (drop-in and bolt-on style)

Create a modular system to protect equipment, inventory, and individuals from damage or injury. Triple ridge corrugated rails are constructed from 1/8" thick material, made for high impact resistance indoors or out. Posts are constructed of 1/4" thick material with mounting holes on all four sides for use as corner or center posts. Posts measure 4" x 4" with a 10" square steel base plate that is 5/8" thick. Bolts and washers are provided with individual rail sections. Provide easy accessibility with our drop-in style rails. Slide rail sections into post saddles for simple assembly. Each drop-in style rail section includes two brackets. Bolt-on style rails are designed for permanent installation.

MODEL NUMBER	COLOR	HEIGHT	GUARD LENGTH	MOUNTING POSTS REQUIRED	WEIGHT (POUND)
STRUCTURAL GUARD RAIL SECTION - DROP-IN STYLE (BRACKETS & HARDWARE INCLUDED PER RAIL)					
YGR-LO-3	YELLOW	15"	29 7/8"	2	38
YGR-LO-4	YELLOW	15"	41 7/8"	2	58
YGR-LO-5	YELLOW	15"	53 7/8"	2	73
YGR-LO-6	YELLOW	15"	65 7/8"	2	85
YGR-LO-7	YELLOW	15"	77 7/8"	2	97
YGR-LO-8	YELLOW	15"	89 7/8"	2	109
YGR-LO-9	YELLOW	15"	101 7/8"	2	121
YGR-LO-10	YELLOW	15"	113 7/8"	2	131
GGR-LO-4	GALVANIZED	15"	41 7/8"	2	61
GGR-LO-6	GALVANIZED	15"	65 7/8"	2	85
GGR-LO-8	GALVANIZED	15"	89 7/8"	2	109
GGR-LO-10	GALVANIZED	15"	113 7/8"	2	133
STRUCTURAL GUARD RAIL SECTION - BOLT-ON STYLE (HARDWARE INCLUDED PER RAIL)					
YGR-B-3	YELLOW	15"	29 7/8"	2	36
YGR-B-4	YELLOW	15"	41 7/8"	2	45
YGR-B-5	YELLOW	15"	53 7/8"	2	60
YGR-B-6	YELLOW	15"	65 7/8"	2	72
YGR-B-7	YELLOW	15"	77 7/8"	2	84
YGR-B-8	YELLOW	15"	89 7/8"	2	96
YGR-B-9	YELLOW	15"	101 7/8"	2	108
YGR-B-10	YELLOW	15"	113 7/8"	2	120
GGR-B-4	GALVANIZED	15"	41 7/8"	2	48
GGR-B-6	GALVANIZED	15"	65 7/8"	2	72
GGR-B-8	GALVANIZED	15"	89 7/8"	2	96
GGR-B-10	GALVANIZED	15"	113 7/8"	2	120
RIGID POSTS					
YGR-TP18	YELLOW	18"	RIGID POST (1 guard rail level)		36
YGR-TP42	YELLOW	42"	RIGID POST (2 guard rail level)		65
YGR-TP60	YELLOW	60"	RIGID POST (3 guard rail level)		83
YGR-TP72	YELLOW	72"	RIGID POST (4 guard rail level)		95
GGR-TP18	GALVANIZED	18"	RIGID POST (1 guard rail level)		35
GGR-TP42	GALVANIZED	42"	RIGID POST (2 guard rail level)		59
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4

CUSTOM SIZES AVAILABLE, CONTACT FACTORY


Structural Channel Guard Rail Systems

Constructed of structural C-channel 11.5 lb. per foot for maximum strength and protection. Railing can be removed in a matter of seconds. Features 10" x 10" base plate with four (4) pre-drilled mounting holes. Posts include mounting holes on three sides for use as corner or center posts. Drop-in style bracket, and their hardware come with each structural rail purchased. Baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	# OF BRACKETS	HEIGHT	LENGTH	WEIGHT (POUND)
ST-GR-4	STRUCTURAL GUARD RAIL	2	8"	48"	56
ST-GR-6	STRUCTURAL GUARD RAIL	2	8"	72"	71
ST-GR-8	STRUCTURAL GUARD RAIL	2	8"	96"	95
ST-GR-10	STRUCTURAL GUARD RAIL	3	8"	120"	118
ST-GR-12	STRUCTURAL GUARD RAIL	3	8"	144"	168
STGR-TP-18DI	18" HIGH TUBULAR POST (1 guard rail level)				27
STGR-TP-42DI	42" HIGH TUBULAR POST (2 guard rail level)				52
STGR-TP-60DI	60" HIGH TUBULAR POST (3 guard rail level)				95
STGR-TP-72DI	72" HIGH TUBULAR POST (3 guard rail level)				116
STGR-BKT-DI	ONE POST MOUNTING BRACKET (ADDITIONAL)				7
STGR-BKT-CS-DI	ONE CENTER SUPPORT BRACKET 10 & 12 FT. RAILS (ADD'L)				4
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4




POWDER COAT DROP-IN STYLE

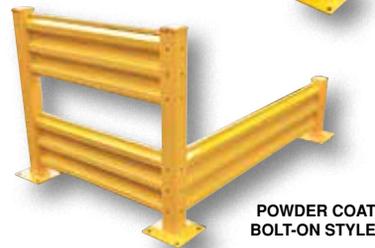

POWDER COAT BOLT-ON STYLE



GALVANIZED BOLT-ON STYLE



GALVANIZED DROP-IN STYLE



series GGR-TP




STRUCTURAL GUARD RAIL series ST-GR (shown with two (2) GR-TP18 posts available separately)



TUBULAR POST series GR-TP42





Heavy Duty Guard Rails

Heavy Duty Guard Rails are one of the strongest on the market withstanding multiple hits from a forklift. Stops a 12,000 lb. forklift traveling at 8 mph. Upon impact, guard rail distributes the shock throughout the entire section, resulting in zero deflection. Heavy duty pipe sleeved in durable HDPE plastic, where pipe post is 4" schedule 80 pipe, and pipe rail is 6" schedule 40 pipe. Standard color is safety yellow. The maintenance-free, never paint again system will keep your facility looking clean and new. Units arrive fully assembled. Other configurations and sizes available, contact factory.

MODEL NUMBER	OVERALL LENGTH	OVERALL HEIGHT	BASE PLATE (W x L)	WEIGHT (POUND)
HDGR-4-27	48"	27"	10" x 10"	299
HDGR-4-36	48"	36"	10" x 10"	321
HDGR-4-42	48"	42"	10" x 10"	336
HDGR-6-27	72"	27"	10" x 10"	387
HDGR-6-36	72"	36"	10" x 10"	409
HDGR-6-42	72"	42"	10" x 10"	424
HDGR-8-27	96"	27"	10" x 10"	475
HDGR-8-36	96"	36"	10" x 10"	497
HDGR-8-42	96"	42"	10" x 10"	512
HDGR-10-27	120"	27"	10" x 10"	563
HDGR-10-36	120"	36"	10" x 10"	585
HDGR-10-42	120"	42"	10" x 10"	600
HDGR-12-27	144"	27"	10" x 10"	651
HDGR-12-36	144"	36"	10" x 10"	673
HDGR-12-42	144"	42"	10" x 10"	688
AS-346	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 6"			1
AS-346-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 6"			4



model BOL-42-2

Steel Pipe Safety Bollards

Bollards can be used both indoors and outdoors to protect work areas, racking and personnel. Plastic top caps are removable on the 1 3/4", 4 1/2", and 5 1/2" diameter units and bollard may be filled with concrete. Steel caps are welded on the 6 5/8" and 8 5/8" diameter units. Base plate includes four (4) pre-drilled mounting holes. Mounting kits and replacement caps available. Baked-in powder-coated toughness.

48 Hours
to Ship

POWDER
COATED
TOUGH



model BOL-42-4.5

MODEL NUMBER	FINISH	HEIGHT	OUTSIDE DIAMETER	BASE PLATE (W x L)	WEIGHT (POUND)
BOL-24-2	YELLOW POWDER COAT	24"	1 3/4"	4" x 4"	6
BOL-36-2	YELLOW POWDER COAT	36"	1 3/4"	4" x 4"	9
BOL-42-2	YELLOW POWDER COAT	42"	1 3/4"	4" x 4"	10
BOL-48-2	YELLOW POWDER COAT	48"	1 3/4"	4" x 4"	11
BOL-24-4.5	YELLOW POWDER COAT	24"	4 1/2"	8" x 8"	17
BOL-36-4.5	YELLOW POWDER COAT	36"	4 1/2"	8" x 8"	22
BOL-42-4.5	YELLOW POWDER COAT	42"	4 1/2"	8" x 8"	26
BOL-48-4.5	YELLOW POWDER COAT	48"	4 1/2"	8" x 8"	29
BOL-62-4.5	YELLOW POWDER COAT	62"	4 1/2"	8" x 8"	39
BOL-72-4.5	YELLOW POWDER COAT	72"	4 1/2"	8" x 8"	49
BOL-24-5.5	YELLOW POWDER COAT	24"	5 1/2"	8" x 8"	20
BOL-36-5.5	YELLOW POWDER COAT	36"	5 1/2"	8" x 8"	26
BOL-42-5.5	YELLOW POWDER COAT	42"	5 1/2"	8" x 8"	30
BOL-48-5.5	YELLOW POWDER COAT	48"	5 1/2"	8" x 8"	35
BOL-62-5.5	YELLOW POWDER COAT	62"	5 1/2"	8" x 8"	45
BOL-72-5.5	YELLOW POWDER COAT	72"	5 1/2"	8" x 8"	55
BOL-36-6.5	YELLOW POWDER COAT	36"	6 5/8"	8" x 8"	30
BOL-42-6.5	YELLOW POWDER COAT	42"	6 5/8"	8" x 8"	49
BOL-48-6.5	YELLOW POWDER COAT	48"	6 5/8"	8" x 8"	51
BOL-62-6.5	YELLOW POWDER COAT	62"	6 5/8"	8" x 8"	61
BOL-72-6.5	YELLOW POWDER COAT	72"	6 5/8"	8" x 8"	71
BOL-36-8.5	YELLOW POWDER COAT	36"	8 5/8"	10" x 10"	53
BOL-42-8.5	YELLOW POWDER COAT	42"	8 5/8"	10" x 10"	62
BOL-48-8.5	YELLOW POWDER COAT	48"	8 5/8"	10" x 10"	126
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3" (1 3/4" UNITS)				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3" (1 3/4" UNITS)				4
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4" (OTHER UNITS)				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4" (OTHER UNITS)				4

Replaceable Bollard Caps

Replace lost or damaged bollard caps. Easy to attach. Plastic cap has serrated tapered teeth for press-fit installation.

MODEL NUMBER	MATERIAL	INNER DIAMETER PIPE FITTING	FITS MODEL	WEIGHT (POUND)
BOL-CAP-1.75-P Ⓢ	PLASTIC	1.38" (1 1/4" SCH. 40 PIPE)	BOL-2	2
BOL-CAP-4.5-P Ⓢ	PLASTIC	4.26" (4" SCH. 10 PIPE)	BOL-4.5	2
BOL-CAP-5.5-P Ⓢ	PLASTIC	5.30" (5" SCH. 10 PIPE)	BOL-5.5	2
BOL-CAP-1.75-R Ⓢ	RUBBER	1.38" (1 1/4" SCH. 40 PIPE)	BOL-2	2
BOL-CAP-5.5-R Ⓢ	RUBBER	5.30" (5" SCH. 10 PIPE)	BOL-5.5	2



PLASTIC series BOL-CAP-P



RUBBER series BOL-CAP-R

48 Hours to Ship



Protective Dome Covers for Bollards

Prevent accidents and injuries from people tripping over raised bolts. Easy to use device slides over bollards covering mounting hardware and base plate for a nice clean finish. Durable yellow baked-in powder-coated toughness. Steel construction. No hardware required.

MODEL NUMBER	USE WITH	OUTSIDE DIAMETER	HEIGHT	WEIGHT (POUND)
DOME-4.5 Ⓢ	4 1/2" DIAMETER BOLLARDS	14"	2 13/16"	8
DOME-5.5 Ⓢ	5 1/2" DIAMETER BOLLARDS	14"	2 3/4"	9



48 Hours to Ship

POWDER COATED TOUGH

model DOME-4.5

Special Powder Coat Finishes for Guards & Barriers

Now you can select from a variety of colors to fit many different types of bollard installations. Color codes can quickly identify different areas in a factory. For example use red to signal fire extinguishers. To complete your buildings appearance choose from our architectural color palette. Simply add the "SPO" number to your product number and contact factory for current pricing.

MODEL NUMBER	DESCRIPTION	COLOR	GLOSS LEVEL
ARCHITECTURAL COLORS			
SPO-PC-BRN-EB	EARTH BROWN	DARK BROWN	85%
SPO-PC-BRN-KT	KHAKI TAN	MEDIUM BEIGE	85%
SPO-PC-BRN-SB	SANDY BEIGE	LIGHT BEIGE	85%
SPO-PC-BLK-HG	BLACK, HIGH GLOSS	BLACK, HIGH GLOSS	85%
SPO-PC-BLK-SG	BLACK, SEMI-GLOSS	BLACK, SEMI-GLOSS	35%
SPO-PC-GRN-H	HUNTER GREEN	DARK GREEN	85%
SPO-PC-GRN-T	TRACTOR GREEN	MEDIUM GREEN	85%
SPO-PC-GY-SG	BATTLE SHIP GRAY	MEDIUM GRAY	85%
SPO-PC-GY-MG	MACHINE GRAY	LIGHT GRAY	85%

POWDER COATED TOUGH



DARK BROWN



MEDIUM BEIGE



LIGHT BEIGE



BLACK HIGH GLOSS



DARK GREEN



MEDIUM GREEN



MEDIUM GRAY



LIGHT GRAY

MODEL NUMBER	DESCRIPTION	COLOR	GLOSS LEVEL
BRIGHT/ALERT COLORS			
SPO-PC-WT	SNOWY WHITE	WHITE	85%
SPO-PC-SR	SODA RED	RED	85%
SPO-PC-ORG-C	CITRUS ORANGE	ORANGE	85%
SPO-PC-BL-E	ERGO BLUE	VESTIL BLUE	85%
SPO-PC-BG	BUBBLE GUM	PINK	85%



WHITE



RED



ORANGE



BLUE



PINK



48 Hours
to Ship

Plastic Bollard Covers

Eliminate the need for costly scraping and painting of unsightly bollards. The low density polyethylene thermoplastic molded sleeves slide over existing bollards. Covers are ¼" thick. No hardware needed. Additional sizes, colors, and reflective stripes available. Contact factory.

MODEL NUMBER	USE WITH MODEL	BOLLARD HEIGHT	OVERALL COVER HEIGHT	INSIDE DIAMETER	WEIGHT (POUND)
BPC-24-4.5	BOL-24-4.5	24"	26¾"	4 ¹³ / ₁₆ "	5
BPC-36-4.5	BOL-36-4.5	36"	38¼"	4 ¹³ / ₁₆ "	6
BPC-42-4.5	BOL-42-4.5	42"	44¼"	4 ¹³ / ₁₆ "	9
BPC-48-4.5	BOL-48-4.5	48"	51"	4 ¹³ / ₁₆ "	9
BPC-24-5.5	BOL-24-5.5	24"	27"	5 ⁷ / ₈ "	6
BPC-36-5.5	BOL-36-5.5	36"	39¼"	5 ⁷ / ₈ "	8
BPC-42-5.5	BOL-42-5.5	42"	45¼"	5 ⁷ / ₈ "	10
BPC-48-5.5	BOL-48-5.5	48"	50½"	5 ⁷ / ₈ "	10
BPC-36-6.5	BOL-36-6.5	36"	38¼"	6¾"	9
BPC-42-6.5	BOL-42-6.5	42"	45½"	6¾"	11
BPC-48-6.5	BOL-48-6.5	48"	51½"	6¾"	11
BPC-36-8.5	BOL-36-8.5	36"	39¼"	8¾"	10
BPC-42-8.5	BOL-42-8.5	42"	45½"	8¾"	12
BPC-48-8.5	BOL-48-8.5	48"	51½"	8¾"	12



48 Hours
to Ship

model BPC-7



model BPC-7L



model BPC-DM-FG

Bollard/Post Covers

Durable poly sleeves will minimize maintenance and improve appearance. Covers are ⅛" thick. Units slide over existing bollards. No hardware needed.

MODEL NUMBER	BOLLARD HEIGHT	OVERALL COVER HEIGHT	OUTSIDE DIAMETER	INSIDE DIAMETER	DOUBLE RED REFLECTORS	WEIGHT (POUND)
BPC-4	52"	54½"	5"	4 ⁷ / ₈ "	NO	6
BPC-7	52"	55"	7 ¹ / ₈ "	7"	NO	8
BPC-4L	52"	54½"	5"	4 ⁷ / ₈ "	YES	6
BPC-7L	52"	55"	7 ¹ / ₈ "	7"	YES	8

Decorative Bollard Covers

Improve the overall appearance of your facility. Eliminate painting your bollards again. This ¼" thick polyethylene thermoplastic material slides over your existing steel bollard. Inserts available for the 10"-11" diameter covers to fit 6" or 8" pipe. Contact factory for details.



model BPC-DM-LAC-FG



model BPC-DM-LUV-GY



model BPC-DA-FG



model BPC-DP-R



model BPC-DC-B



model BPC-DR-GY

MODEL NUMBER	BOLLARD HEIGHT	OVERALL HEIGHT	TYPE	COLOR	FITS PIPE DIAMETER	WEIGHT (POUND)
BPC-DM-R	52"	52"	METRO	RED	6" to 6 ⁵ / ₈ "	18
BPC-DM-FG	52"	52"	METRO	GREEN	6" to 6 ⁵ / ₈ "	18
BPC-DM-B	52"	52"	METRO	BLACK	6" to 6 ⁵ / ₈ "	18
BPC-DM-GY	52"	52"	METRO	GRAY	6" to 6 ⁵ / ₈ "	18
BPC-DM-LAC-R	52"	57"	METRO W/LIGHT*	RED	6" to 6 ⁵ / ₈ "	28
BPC-DM-LAC-FG	52"	57"	METRO W/LIGHT*	GREEN	6" to 6 ⁵ / ₈ "	28
BPC-DM-LAC-B	52"	57"	METRO W/LIGHT*	BLACK	6" to 6 ⁵ / ₈ "	28
BPC-DM-LAC-GY	52"	57"	METRO W/LIGHT*	GRAY	6" to 6 ⁵ / ₈ "	28
BPC-DM-LUV-R	52"	57"	METRO W/LIGHT**	RED	6" to 6 ⁵ / ₈ "	28
BPC-DM-LUV-FG	52"	57"	METRO W/LIGHT**	GREEN	6" to 6 ⁵ / ₈ "	28
BPC-DM-LUV-B	52"	57"	METRO W/LIGHT**	BLACK	6" to 6 ⁵ / ₈ "	28
BPC-DM-LUV-GY	52"	57"	METRO W/LIGHT**	GRAY	6" to 6 ⁵ / ₈ "	28
BPC-DA-R	52"	52"	ARCH	RED	6" to 6 ⁵ / ₈ "	15
BPC-DA-FG	52"	52"	ARCH	GREEN	6" to 6 ⁵ / ₈ "	15
BPC-DA-B	52"	52"	ARCH	BLACK	6" to 6 ⁵ / ₈ "	15
BPC-DA-GY	52"	52"	ARCH	GRAY	6" to 6 ⁵ / ₈ "	15
BPC-DP-R	49"	49"	PAWN	RED	10" to 11"	18
BPC-DP-FG	49"	49"	PAWN	GREEN	10" to 11"	18
BPC-DP-B	49"	49"	PAWN	BLACK	10" to 11"	18
BPC-DP-GY	49"	49"	PAWN	GRAY	10" to 11"	18
BPC-DC-R	52"	52"	CINCO	RED	10" to 11"	18
BPC-DC-FG	52"	52"	CINCO	GREEN	10" to 11"	18
BPC-DC-B	52"	52"	CINCO	BLACK	10" to 11"	18
BPC-DC-GY	52"	52"	CINCO	GRAY	10" to 11"	18
BPC-DR-R	52"	52"	RIBBED	RED	10" to 11"	18
BPC-DR-FG	52"	52"	RIBBED	GREEN	10" to 11"	18
BPC-DR-B	52"	52"	RIBBED	BLACK	10" to 11"	18
BPC-DR-GY	52"	52"	RIBBED	GRAY	10" to 11"	18

*AC WIRED LIGHT ON TOP OF COVER

**SOLAR POWERED LIGHT ON TOP OF COVER

Jumbo Steel Bollards

Oversized steel pipe for maximum protection and strength. Bollards can be used both indoors and outdoors to protect work areas, racking, and personnel. Base plate includes four pre-drilled mounting holes. Welded steel cap. Heavy-duty welded steel construction. Baked-in powder-coated toughness.

MODEL NUMBER	HEIGHT	OUTSIDE DIAMETER	BASE PLATE DIAMETER	WEIGHT (POUND)
JBOL-36-12	36 ³ / ₁₆ "	12"	16 ²⁹ / ₃₂ "	64
JBOL-42-12	42 ⁹ / ₁₆ "	12"	16 ²⁹ / ₃₂ "	72
JBOL-48-12	48 ³ / ₁₆ "	12"	16 ²⁹ / ₃₂ "	81
AS-344 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



**JUMBO
STEEL BOLLARD**
model JBOL-36-12

Surface Mounted Removable Steel Pipe Safety Bollards

Bollards can be used both indoors and outdoors to protect work areas, racking, and personnel. Surface mounted steel base plate allows for quick and easy bollard removal. Steel base plate is bolted in place (padlock not included). Guard is easily inserted into base plate, then secured in place. A padlock may be added to prevent unauthorized removal. Base plate measures 10¹/₄"W x 10¹/₂"L x 2"H and include four (4) pre-drilled mounting holes. Plastic top caps are removable. Baked-in powder-coated toughness. Welded steel construction.

MODEL NUMBER	DESCRIPTION	HEIGHT	OUTSIDE DIAMETER	WEIGHT (POUND)
BOL-RF-24-4.5 Ⓢ	SURFACE MOUNTED BOLLARD	24"	4 ¹ / ₂ "	30
BOL-RF-36-4.5 Ⓢ	SURFACE MOUNTED BOLLARD	36"	4 ¹ / ₂ "	32
BOL-RF-42-4.5 Ⓢ	SURFACE MOUNTED BOLLARD	42"	4 ¹ / ₂ "	35
BOL-RF-48-4.5 Ⓢ	SURFACE MOUNTED BOLLARD	48"	4 ¹ / ₂ "	37
BOL-RF-24-5.5 Ⓢ	SURFACE MOUNTED BOLLARD	24"	5 ¹ / ₂ "	33
BOL-RF-36-5.5 Ⓢ	SURFACE MOUNTED BOLLARD	36"	5 ¹ / ₂ "	35
BOL-RF-42-5.5 Ⓢ	SURFACE MOUNTED BOLLARD	42"	5 ¹ / ₂ "	37
BOL-RF-48-5.5 Ⓢ	SURFACE MOUNTED BOLLARD	48"	5 ¹ / ₂ "	41
BOL-RF-BASE Ⓢ	REMOVABLE BOLLARD BASE (ADDITIONAL)			10
AS-124 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 4" (4 ¹ / ₂ " UNITS)			1
AS-124-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4" (4 ¹ / ₂ " UNITS)			4
AS-125 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5" (5 ¹ / ₂ " UNITS)			1
AS-125-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5" (5 ¹ / ₂ " UNITS)			4



**48 Hours
to Ship**

CA Residents see
WARNING A, Pg. 459



model BOL-RF-42-4.5

Movable Bollards

Movable Bollards provide a portable visual barrier when an area needs temporary protection. Ideal for use when keeping traffic out of a temporarily hazardous area or area under repair. Can be used indoors or outdoors. Units are 42" high with a diameter of 5¹/₂". 10" mold-on-rubber wheels standard. Yellow baked-in powder-coated toughness for high visibility. Series BOL-MB-JK has a removable plastic top cap, which exposes four chain slots. Series BOL-MB-JKS has a removable bolt-on steel top cap with socket set-screw.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
BOL-MB-42-5.5	MOVABLE BOLLARD WITH REMOVABLE CAP & NO SLOTS	53
BOL-MB-JK-42-5.5	REMOVABLE PLASTIC CAP WITH SLOTS	53
BOL-MB-JKS-42-5.5	REMOVABLE BOLT-ON STEEL CAP WITH SLOTS	53
BOL-JK-CN6 Ⓢ	PROOF COIL CHAIN, ³ / ₁₆ " x 6'L	2
BOL-JK-CN15 Ⓢ	PROOF COIL CHAIN, ³ / ₁₆ " x 15'L	5



model
BOL-MB-42-5.5



BOL-MB-JK-42-5.5



BOL-MB-JKS-42-5.5

Offset Steel Bollards

Unique design features offset base plate that won't interfere with traffic. The 8" x 8" base plate includes four (4) pre-drilled mounting holes (mounting hardware sold separately). Removable plastic top cap and black/yellow safety tape included. Heavy-duty welded steel construction with baked-in powder-coated toughness.

MODEL NUMBER	HEIGHT	OUTSIDE DIAMETER	BASE PLATE	WEIGHT (POUND)
OBOL-35-4.5	36 ¹ / ₈ "	4 ¹ / ₂ "	8" x 8"	29
OBOL-47-4.5	48 ¹ / ₈ "	4 ¹ / ₂ "	8" x 8"	33
OBOL-53-4.5	54 ¹ / ₈ "	4 ¹ / ₂ "	8" x 8"	39
AS-344 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



**OFFSET
STEEL BOLLARD**
model OBOL-47-4.5





REMOVABLE RUBBER CAP series BOL-JK




REMOVABLE BOLT-ON STEEL CAP series BOL-JKS



model BOL-DRING



model BOL-JHOOK



POUR IN PLACE series BOLPP

Steel Pipe Bollard with Chain Slots

Create barriers around workstations, machinery, and outdoor space. Ideal for indoor and outdoor applications. Easy to assemble. Series BOL-JK has a removable plastic top cap, which exposes four chain slots. Series BOL-JKS has a removable bolt-on steel top cap with socket set-screw. Place chain into chain slots, storing any excess chain inside the bollard, and place cap back onto bollard. The chain slots hold chain connected to other bollards. Base plate includes four pre-drilled mounting holes. Heavy duty welded steel construction. Yellow baked-in powder-coated toughness for high visibility.

MODEL NUMBER	TOP CAP STYLE	DIAMETER	HEIGHT	WEIGHT (POUND)
BOL-JK-24-4.5	REMOVABLE PLASTIC CAP	4½"	24"	17
BOL-JK-36-4.5	REMOVABLE PLASTIC CAP	4½"	36"	20
BOL-JK-42-4.5	REMOVABLE PLASTIC CAP	4½"	42"	22
BOL-JK-48-4.5	REMOVABLE PLASTIC CAP	4½"	48"	28
BOL-JK-24-5.5	REMOVABLE PLASTIC CAP	5½"	24"	23
BOL-JK-36-5.5	REMOVABLE PLASTIC CAP	5½"	36"	27
BOL-JK-42-5.5	REMOVABLE PLASTIC CAP	5½"	42"	30
BOL-JK-48-5.5	REMOVABLE PLASTIC CAP	5½"	48"	36
BOL-JKS-24-4.5	REMOVABLE BOLT-ON STEEL CAP	4½"	24"	21
BOL-JKS-36-4.5	REMOVABLE BOLT-ON STEEL CAP	4½"	36"	24
BOL-JKS-42-4.5	REMOVABLE BOLT-ON STEEL CAP	4½"	42"	27
BOL-JKS-48-4.5	REMOVABLE BOLT-ON STEEL CAP	4½"	48"	42
BOL-JKS-24-5.5	REMOVABLE BOLT-ON STEEL CAP	5½"	24"	29
BOL-JKS-36-5.5	REMOVABLE BOLT-ON STEEL CAP	5½"	36"	31
BOL-JKS-42-5.5	REMOVABLE BOLT-ON STEEL CAP	5½"	42"	35
BOL-JKS-48-5.5	REMOVABLE BOLT-ON STEEL CAP	5½"	48"	50
BOL-JK-CN6	PROOF COIL CHAIN, 3/16" x 6 FT. LONG			2
BOL-JK-CN15	PROOF COIL CHAIN, 3/16" x 15 FT. LONG			5
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			2
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			2

Chain & Attachments for Bollards

Welded chain attachment allows you to create barriers around workstations and machinery. Ideal for indoor and outdoor applications. Factory installed (welded). Available on all sizes of Steel Pipe Bollards. Powder coat safety yellow finish. Steel pipe bollard and chain sold separately.

MODEL NUMBER	DESCRIPTION	LOCATION	USABLE OPENING	SPACING	WEIGHT (POUND)
BOL-DRING	D-RING	6" FROM TOP	1 3/8"	180°	1/PR.
BOL-JHOOK	"J" HOOK	6" FROM TOP	1/4"D x 1"H	180°	1/PR.
SNAP-H-25	1/4" SNAP HOOK				1
BOL-CHAIN	YELLOW STEEL POWDER COAT CHAIN, SOLD PER FOOT				0.5/FT.
BOL-JK-CN6	PROOF COIL CHAIN, 3/16" x 6 FT. LONG				2
BOL-JK-CN15	PROOF COIL CHAIN, 3/16" x 15 FT. LONG				5

Pour In Place Bollards

Make your bollards permanent by setting them in concrete. The extra length of the Pour in Place Bollards allow you to maintain the needed height while fixing the bollard in concrete. Bollard comes with slide through lag anchors and a removable cap (except models with outside diameter of 6 5/8" are open-topped, no cap) so the bollard can be filled with concrete to increase its strength and durability. Baked-in powder-coated toughness. Assembly required.

MODEL NUMBER	USABLE HEIGHT	OVERALL HEIGHT	OUTSIDE DIAMETER	WEIGHT (POUND)
BOLPP-24-4.5	25"	35"	4½"	19
BOLPP-36-4.5	36½"	46½"	4½"	31
BOLPP-42-4.5	42½"	52½"	4½"	35
BOLPP-48-4.5	48½"	58½"	4½"	47
BOLPP-62-4.5	62"	72"	4½"	80
BOLPP-72-4.5	72"	82"	4½"	90
BOLPP-24-5.5	25"	35"	5 9/16"	26
BOLPP-36-5.5	36½"	46½"	5 9/16"	32
BOLPP-42-5.5	42½"	52½"	5 9/16"	37
BOLPP-48-5.5	48½"	58½"	5 9/16"	48
BOLPP-62-5.5	62"	72"	5 9/16"	80
BOLPP-72-5.5	72"	82"	5 9/16"	92
BOLPP-24-6.5	25"	35"	6 5/8"	30
BOLPP-36-6.5	36½"	46½"	6 5/8"	39
BOLPP-42-6.5	42½"	52½"	6 5/8"	44
BOLPP-48-6.5	48½"	58½"	6 5/8"	49
BOLPP-62-6.5	62"	72"	6 5/8"	87
BOLPP-72-6.5	72"	82"	6 5/8"	99

Removable Bollards

Removable Bollards include one (1) mounting sleeve and one (1) bollard. Lift the bollard out of the supplied mounting sleeve to remove. When the bollard is removed, consider the cover sleeve option to prevent debris from collecting in the mounting sleeve. Bollards are capable of being installed into cement for a strong secured base. Yellow baked-in powder-coated toughness for high visibility.

MODEL NUMBER	USABLE HEIGHT	OVERALL HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
BOL-R-36-5.5	36¾"	46¾"	5 ⁹ / ₁₆ "	40
BOL-R-42-5.5	42¾"	52¾"	5 ⁹ / ₁₆ "	45
BOL-R-48-5.5	48¾"	58¾"	5 ⁹ / ₁₆ "	46
BOL-R-72-5.5	72¾"	82¾"	5 ⁹ / ₁₆ "	87
BOL-R-SLV-CV	OPTIONAL SLEEVE COVER (use when bollard is removed)			8



BOLLARD & MOUNTING SLEEVE

BOLLARD IN MOUNTING SLEEVE

Removable Ornamental Steel Bollards

Provide an attractive, yet functional barrier to vehicle access and parking areas. Bollards are 4½" in diameter, while the rings make the overall diameter 6". Padlock not included. Baked-in powder-coated toughness. Includes eyes for attaching chain or rope.

Model BOL-OR-40-BK, locks into steel socket that is cemented into the ground. When the bollard is removed, a cover plate protects the hole leaving no protrusion above the surface. Galvanized base is included with bollard.

Model BOL-OR-40-BK-SM, fits into steel socket that is bolted to ground (mounting hardware not included).

MODEL NUMBER	MOUNTING	USABLE HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
BOL-OR-40-BK Ⓢ	UNDERGROUND	40"	4½"	121
BOL-OR-40-BK-SM Ⓢ	SURFACE	46¾"	4½"	126
AS-344 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



REMOVABLE ORNAMENTAL BOLLARD model BOL-OR-40-BK

CA Residents see WARNING A, Pg. 459

Self Storing Bollard with Door

This unique bollard is designed to slide down into the ground or floor when not needed. Great for preventing access to parking areas. Each unit includes a sleeve that can be set in the ground with concrete. Bollard has a handle in the top to allow for easy lifting and lowering. Lift and twist to lock into raised position. Twist and lower to return to stored position. Includes locking tab for use with padlock (padlock not included) to prevent unauthorized operation. Steel construction with baked-in powder-coated toughness.

MODEL NUMBER	USABLE HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
BOL-SSTOR-42-4.5	42½"	4½"	154



SELF STORING model BOL-SSTOR-42-4.5


Spring Loaded Steel Bollards

Designed to serve as a visual and/or audible warning to personnel. Unique 30° spring-loaded design will bend and not break like rigid bollards. Prevents damage to bollard and equipment. Promotes long life. Order bollard with or without light/siren option. Light/siren option includes sensitive switches that will activate a strobe light and warning siren when contacted. Operates with two (2) 9V batteries (not included). Simply slides into open top of bollard. Each bollard is manufactured from steel and includes baked-in powder-coated toughness. Bollards measure 42" high (45¼" model SPBOL-42-BL) with a 2½" O.D.

MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
SPBOL-42 Ⓢ	SPRING BOLLARD	13
SPBOL-42-BL Ⓢ	SPRING BOLLARD WITH BEEPER & STROBE	15
AS-383 Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"	1
AS-383-4PK Ⓢ	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"	4



model SPBOL-42-BL

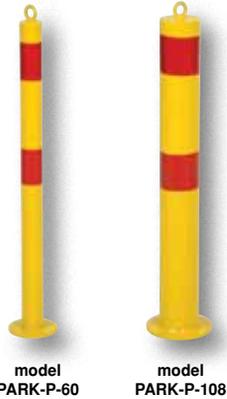

POWDER COATED TOUGH™
48 Hours to Ship

Fixed Height Bollards

Surface mounted unit is easy to install. Top mounted eyelets can be used with chains or rope to create a barrier. UV resistant high visibility bright yellow baked-in powder-coated toughness. Can be used in conjunction with our Fold Down Bollards, series PARK-P-FD. Reflective bands included.

MODEL NUMBER	DESCRIPTION	HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
PARK-P-60Ⓢ	YELLOW	35½"	2½"	7
PARK-P-76Ⓢ	YELLOW	35½"	3"	7
PARK-P-108Ⓢ	YELLOW	35½"	4¼"	8
AS-383Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"			1
AS-383-4PKⓈ	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"			4



model PARK-P-108-FD

POWDER COATED TOUGH™

48 Hours to Ship


model PARK-P-108-FD-SS

Fold Down Bollards

Ideal for vehicle access control. These heavy duty bollards feature integrated locking and an easy to operate cam-lock. Unit secures in both open and closed position via internal lock. Two (2) keys included. Anchors included for securing bollard to concrete.

Two (2) wrap around reflectors adhere to the baked-in powder-coated toughness or stainless steel finish. The anti-tamper design and cast steel covering foot is made in a mold, therefore there are no welds. Can be used in conjunction with our Fixed Height Bollards shown above.

MODEL NUMBER	DESCRIPTION	RAISED HEIGHT	COLLAPSED HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
PARK-P-60-FDⓈ	YELLOW	35½"	5"	2½"	7
PARK-P-76-FDⓈ	YELLOW	35½"	5"	3"	15
PARK-P-108-FDⓈ	YELLOW	35½"	5"	4¼"	25
PARK-P-108-FD-SSⓈ	STAINLESS STEEL	33½"	5"	4¼"	20
PARK-P-108-FD-KEYⓈ	EXTRA SET OF TWO (2) KEYS				1
AS-383Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"				1
AS-383-4PKⓈ	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"				4

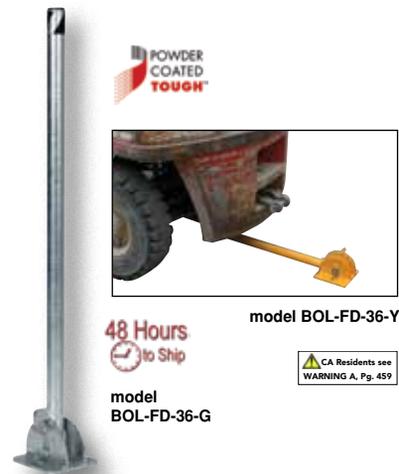

POWDER COATED TOUGH™

48 Hours to Ship

model BOL-FD-36-Y

model BOL-FD-36-G

CA Residents see WARNING A, Pg. 459

Folding Bollards

Folding steel barrier post for parking control and security. Bollard is locked in the raised position with a padlock (padlock not included). When padlock is removed, bollard may be lowered to ground to allow for access. Padlock hole diameter is 3/8". Base plate must be lagged to ground for proper installation (hardware not included). Steel construction. Baked-in yellow powder-coated toughness or galvanized finish.

MODEL NUMBER	DESCRIPTION	RAISED HEIGHT	COLLAPSED HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
BOL-FD-36-YⓈ	YELLOW	42"	4¼"	1 ¹¹ / ₁₆ "	15
BOL-FD-36-GⓈ	GALVANIZED	42"	4¼"	1 ¹¹ / ₁₆ "	15
AS-383Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"				4



48 Hours to Ship

POWDER COATED TOUGH™

model PARK-P-38-S

CA Residents see WARNING A, Pg. 459

Heavy Duty Parking Hoops

Secure an individual parking place from unwanted trespassing. Hinged parking hoop is constructed of cast steel with a UV resistant safety yellow baked-in powder-coated toughness on model PARK-P-38-S. Model PARK-P-38-ZN is made of steel construction. In the horizontal position the parking hoop allows free passage for cars and pedestrians. When engaged, the parking hoop is both a visual and safety barrier. Stands on three (3) hinged legs for better stability and resistance. Easy to operate. Secures in both open and closed position via internal lock, two (2) keys included. Reflective bands included.

MODEL NUMBER	MATERIAL	RAISED HEIGHT	WEIGHT (POUND)
PARK-P-38-SⓈ	STEEL POWDER COAT, 34" wide	18"	12
PARK-P-38-ZNⓈ	STEEL WITH ZINC PLATING, 34" wide	18"	12
AS-383Ⓢ	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"		1
AS-383-4PKⓈ	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"		4

Orange Plastic Bollards

Orange Plastic Bollards are engineered for safety and the reduction of accidents. A fluorescent orange color scheme with white reflective tape promotes safety and visibility. A loop located at the top of the unit enables easy handling and it is ideal for any work place. Spring loaded for forgiveness when contacted by an outside force. Solid rubber weight base measures 10" in diameter and includes three (3) mounting holes. Hardware sold separately.

MODEL NUMBER	DESCRIPTION	HEIGHT	BOLLARD DIAMETER	WEIGHT (POUND)
OPBOL-31 [Ⓢ]	BOLLARD	31½"	4"	7
OPBOL-47 [Ⓢ]	BOLLARD	46½"	3⅞"	8
AS-383 [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"			1



Plastic Bollard

Lightweight and portable Plastic Bollard features a round black rubber base. Weighted base provides stability in windy conditions. Reflectors included for better visibility. Easy assembly for use and disassembly for storage.

MODEL NUMBER	HEIGHT	BASE DIAMETER	COLOR	WEIGHT (POUND)
PBOL-24 [Ⓢ]	23"	13¼"	YELLOW	8



Square Steel Bollard

The Square Bollard is perfect for an array of industrial settings, both indoors and outside. Constructed of steel for the utmost strength against collisions. It is also powder coated for a smooth finish and quality appearance. The square design allows the user to better utilize surface space, while also securing vulnerable corners of structures. The flat surfaces are ideal for adding signs. Pre-drilled mounting holes are included for simple installation.

MODEL NUMBER	FINISH	HEIGHT	TUBE SIZE (W x L)	BASE PLATE (W x L)	WEIGHT (POUND)
BOL-SQ-42-4 [Ⓢ]	YELLOW POWDER COAT	42"	4" x 4"	10" x 10"	30
AS-344 [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4

New

POWDER COATED TOUGH

model BOL-SQ-42-4

Stainless Steel Bollards

Bollards can be used both indoors and outdoors to protect work areas, racking, and personnel. Steel caps are welded on. Base plate measures 8" x 8" and includes four (4) pre-drilled mounting holes. Mounting kits available. 304 stainless steel polished finish.

MODEL NUMBER	FINISH	HEIGHT	OUTSIDE DIAMETER	WEIGHT (POUND)
BOL-SS-36-4.5 [Ⓢ]	304 STAINLESS STEEL	36"	4½"	25
BOL-SS-42-4.5 [Ⓢ]	304 STAINLESS STEEL	42"	4½"	28
AS-344 [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



48 Hours to Ship

STAINLESS STEEL BOLLARD
model BOL-SS-42-4.5

Chrome-Plated Steel Bollard

Improve the image of your facility, while protecting people and equipment. Unit is made of steel and finished with an attractive bright chrome plating for a clean fresh look. The mounting plate is pre-drilled with four (4) holes for quick and easy installation.

MODEL NUMBER	HEIGHT	DIAMETER	BASE PLATE DIAMETER	WEIGHT (POUND)
CBOL-42-4 [Ⓢ]	42"	4"	8"	24
AS-125 [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"			1
AS-125-4PK [Ⓢ]	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"			4



CHROME PLATED
model CBOL-42-4

Decorative Aluminum Bollard

Decorate your office's exterior with this inexpensive, functional, and attractive Aluminum Bollard. Rust and corrosion free. Ideal way to protect buildings, windows, loading docks, parking lots, etc.

MODEL NUMBER	HEIGHT	OVERALL DIAMETER	FITS PIPE DIAMETER	WEIGHT (POUND)
BOL-ALUM [Ⓢ]	43½"	12"	6" O.D.	44

48 Hours to Ship



ALUMINUM BOLLARD
model BOL-ALUM



BLACK BROWN GREEN BRONZE ALUMINUM



BOL-CI-28-3 BOL-CI-28-5 BOL-CI-28-7



BOL-CI-39-5 BOL-CI-40-8 BOL-CI-38-8



model BOL-SMK



Architectural Bollards

Architectural Bollards are not only aesthetically pleasing, but functional as well. The robust steel construction with welded cap allows for use in harsh unforgiving climates. The pre-drilled three-hole base plate makes for finding the perfect placement easy. With minimal installation time, the architectural bollards can be in place without the need for extra personnel. For best use, simply place in the desired location and mount to the surface. Not only will the environment be enhanced, it will also be safer.

MODEL NUMBER	HEIGHT	BOLLARD DIAMETER	COLOR	WEIGHT (POUND)
BOLA-42-4.5-BLK-SG	42"	4.5"	SEMI-GLOSS BLACK	27
BOLA-42-4.5-BRN-EB	42"	4.5"	EARTH BROWN	27
BOLA-42-4.5-GRN-H	42"	4.5"	DARK GREEN	27
BOLA-42-4.5-SBZ	42"	4.5"	BRONZE	27
BOLA-42-4.5-SL	42"	4.5"	ALUMINUM	27
BOLA-48-5.5-BLK-SG	48"	5.5"	SEMI-GLOSS BLACK	38
BOLA-48-5.5-BRN-EB	48"	5.5"	EARTH BROWN	38
BOLA-48-5.5-GRN-H	48"	5.5"	DARK GREEN	38
BOLA-48-5.5-SBZ	48"	5.5"	BRONZE	38
BOLA-48-5.5-SL	48"	5.5"	ALUMINUM	38
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"			1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"			4

Ductile Iron Decorative Bollards

Decorative Ductile Iron Bollards are great for the landscaping design of homes and businesses. The bollards mesh the strength of ductile iron with the time tested beauty and product design of days gone by. The subtle curves, tapers, and flutings give these bollards a sense of belonging and purpose. The bollards mounting capabilities of pour in place to surface mount vary by design.

MODEL NUMBER	DESCRIPTION	USABLE HEIGHT	TOP DIAMETER	BASE DIAMETER	WEIGHT (POUND)
BOL-CI-28-3	POUR IN PLACE	28"	3 1/2"	6"	41
BOL-CI-28-5	POUR IN PLACE	28"	5"	7 1/2"	87
BOL-CI-28-7	POUR IN PLACE	28"	8"	8"	90
BOL-CI-39-5	POUR IN PLACE	39 1/2"	5 1/2"	8"	96
BOL-CI-40-8	POUR IN PLACE	40"	8"	9"	103
BOL-CI-38-8	SURFACE MOUNT	38 1/2"	8 1/2"	9 1/4"	120

Smokers Bollards

Heavy-duty steel bollard also functions as a cigarette disposal unit. Cigarette disposable hole measures 1 1/4" diameter. Removable top is connected to steel container for holding cigarette butts. Top is lockable with padlock (padlock not included). Includes baked-in powder-coated toughness. Base plate includes four (4) pre-drilled installation holes. Installation hardware sold separately. Optional Dome base to hide installation bolts.

MODEL NUMBER	DESCRIPTION	HEIGHT	BOLLARD O.D.	BASE PLATE	WEIGHT (POUND)
BOL-SMK	SMOKERS BOLLARD	43"	4 1/2"	8" x 8"	29
BOL-SMK-DOME-AS*	SMOKERS BOLLARD DOME BASE & BOLTS	43"	4 1/2"	8" x 8"	37
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4

*INCLUDES SMOKERS BOLLARD, DOME (diameter 14"), ANCHOR BOLT KIT (four (4) 3/4" x 4" concrete bolts)

Aluminum Smokers Bollards

Manufactured from aluminum alloy for an attractive finish. Includes internal storage container for holding cigarettes. Easy to empty design. Floor-mounted unit includes pre-drilled mounting holes. Wall mounted unit includes hardware.

MODEL NUMBER	DESCRIPTION	HEIGHT	OUTSIDE DIAMETER	WEIGHT (POUND)
SMK-F-35A	FLOOR MOUNTED	35"	3 1/4"	13
SMK-W-19A	WALL MOUNTED	19"	3 1/4"	4



SMK-W-19A HARDWARE



SMK-W-19A SMK-F-35A

Downspout Drain Water Disperser

Attaches to most standard down spouts. Easy installation. Fits up and around the end of downspouts. During a rainstorm water collects at the bottom of drains, ruining grass and landscaping. This device evenly disperses the water outward over a larger area. Aluminum construction. Installation hardware not included.

MODEL NUMBER	OVERALL HEIGHT	OVERALL WIDTH	DEPTH	WEIGHT (POUND)
DRAIN-DD	6½"	12"	8"	6



model DRAIN-DD

Pipe and Downspout Protector

Protect down spouts and pipes attached to buildings from damage caused by fork trucks, vehicles, and mowers. Our Steel Down Spout Guards fit around standard down spouts. Easy bolt on installation (installation hardware not included). Steel construction for optimum strength. Baked-in powder-coated toughness.

MODEL NUMBER	MATERIAL	INSIDE (W x D)	OVERALL SIZE (W x D x H)	WEIGHT (POUND)
DSG-48	STEEL	6" x 6"	9 ³ / ₁₆ " x 6 ¹ / ₈ " x 48"	28



model DSG-48


High Profile Machinery Guards

Heavy-duty welded steel construction for protecting racks, building walls, expensive equipment, and hundreds of other applications. All 42" high units include a 21" mid-rail to comply with OSHA requirements. Available with a yellow baked-in powder-coated toughness or 304 stainless steel polished finish. Two (2) base plates with four (4) pre-drilled mounting holes in each plate.


MODEL NUMBER	FINISH	OVERALL HEIGHT	GUARD LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
HPRO-36-24-2	YELLOW POWDER COAT	24 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	11
HPRO-48-24-2	YELLOW POWDER COAT	24 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	19
HPRO-36-36-2	YELLOW POWDER COAT	36 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	14
HPRO-48-36-2	YELLOW POWDER COAT	36 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	21
HPRO-36-42-2	YELLOW POWDER COAT	42 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	23
HPRO-48-42-2	YELLOW POWDER COAT	42 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	26
HPRO-36-24-4	YELLOW POWDER COAT	24 ⁹ / ₁₆ "	36 ⁵ / ₈ "	4½"	46
HPRO-48-24-4	YELLOW POWDER COAT	24 ⁹ / ₁₆ "	48 ⁵ / ₈ "	4½"	50
HPRO-36-36-4	YELLOW POWDER COAT	36 ⁹ / ₁₆ "	36 ⁵ / ₈ "	4½"	56
HPRO-48-36-4	YELLOW POWDER COAT	36 ⁹ / ₁₆ "	48 ⁵ / ₈ "	4½"	63
HPRO-36-42-4	YELLOW POWDER COAT	42 ⁹ / ₁₆ "	36 ⁵ / ₈ "	4½"	67
HPRO-48-42-4	YELLOW POWDER COAT	42 ⁹ / ₁₆ "	48 ⁵ / ₈ "	4½"	76
HPRO-60-42-4	YELLOW POWDER COAT	42 ⁹ / ₁₆ "	60 ⁵ / ₈ "	4½"	126
HPRO-72-42-4	YELLOW POWDER COAT	42 ⁹ / ₁₆ "	72 ⁵ / ₈ "	4½"	129
HPRO-SS-36-36-4	304 STAINLESS STEEL	36 ¹ / ₄ "	36 ⁵ / ₈ "	4½"	94
HPRO-SS-48-36-4	304 STAINLESS STEEL	36 ¹ / ₄ "	48 ⁵ / ₈ "	4½"	102
HPRO-SS-36-42-4	304 STAINLESS STEEL	42 ¹ / ₄ "	36 ⁵ / ₈ "	4½"	100
HPRO-SS-48-42-4	304 STAINLESS STEEL	42 ¹ / ₄ "	48 ⁵ / ₈ "	4½"	107
HPRO-RF-BASE	BASE FOR HPRO SERIES MACHINERY GUARDS				10
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3" (1 ¹¹ / ₁₆ " UNITS)				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3" (1 ¹¹ / ₁₆ " UNITS)				4
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4" (4½" UNITS)				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4" (4½" UNITS)				4



model HPRO-36-42-2



model HPRO-48-24-4



model HPRO-SS-36-36-4

High Profile Machinery Guards with Welded Mesh

High Profile Machinery Guards are ideal for manufacturing and distribution facilities. The unit is constructed of baked-in powder-coated toughness 7 gauge welded steel wire mesh panels for visibility and long lasting durability. The welded mesh inside design allows for products to be protected, while still being visible. To use, place the unit in front of the selected product and attach to surface. OSHA compliant. Includes baked-in powder-coated toughness. Hardware is available separately.

MODEL NUMBER	FINISH	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
HPRO-M-36-24-2	YELLOW POWDER COAT	24 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	20
HPRO-M-48-24-2	YELLOW POWDER COAT	24 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	24
HPRO-M-36-36-2	YELLOW POWDER COAT	36 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	26
HPRO-M-48-36-2	YELLOW POWDER COAT	36 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	28
HPRO-M-36-42-2	YELLOW POWDER COAT	42 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	35
HPRO-M-48-42-2	YELLOW POWDER COAT	42 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	37
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"				4



model HPRO-M-36-36-2



model
HDPRG-42



Heavy Duty Pallet Rack Guard

Heavy duty steel construction for use when protecting racks. Offset base plates allow closer placement to racking legs. Usable width between outriggers is 50". Heavy structural mid-rail provides extra protection against impacts. Machine guard pipe diameter 4½". Baked-in powder-coated toughness.

MODEL NUMBER	WIDTH	HEIGHT	WEIGHT (POUND)
HDPRG-42	42½"	42 ⁵ / ₁₆ "	98
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"		1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"		4



model
LPRO-RF-48-9-4



model
HPRO-RF-48-42-4

Surface Mounted Removable High Profile Machinery Guards & Low Profile Rack Guards

Surface-mounted steel base plates allow for quick and easy guard removal. May be used either indoors or outdoors. Steel base plates are bolted in place. Guard is easily inserted into base plates then secured in place. A padlock maybe added to prevent unauthorized removal (padlock not included). Base plate includes four (4) pre-drilled mounting holes. Welded steel construction.

MODEL NUMBER	DESCRIPTION	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
LPRO-RF-36-9-4	LOW PROFILE GUARD	9"	36"	4½"	52
LPRO-RF-48-9-4	LOW PROFILE GUARD	9"	48"	4½"	64
LPRO-RF-36-16-4	LOW PROFILE GUARD	16"	36"	4½"	68
LPRO-RF-48-16-4	LOW PROFILE GUARD	16"	48"	4½"	77
HPRO-RF-36-24-4	HIGH PROFILE GUARD	24"	36"	4½"	55
HPRO-RF-48-24-4	HIGH PROFILE GUARD	24"	48"	4½"	73
HPRO-RF-36-36-4	HIGH PROFILE GUARD	36"	36"	4½"	68
HPRO-RF-48-36-4	HIGH PROFILE GUARD	36"	48"	4½"	83
HPRO-RF-36-42-4	HIGH PROFILE GUARD	42"	36"	4½"	71
HPRO-RF-48-42-4	HIGH PROFILE GUARD	42"	48"	4½"	92
LPRO-RF-BASE	REMOVABLE BOLLARD BASE (ADDITIONAL)				10
HPRO-RF-BASE	REMOVABLE BOLLARD BASE (ADDITIONAL)				10

Low Profile Rack Guards

May be used either indoors or outdoors to protect valuable pallet racking, machinery, and personnel. Available with a yellow baked-in powder-coated toughness or 304 stainless steel polished finish. Two base plates with four (4) pre-drilled mounting holes in each plate. Welded steel construction.



model
LPRO-48-16-2



model
LPRO-48-9-2



model
LPRO-SS-36-9-4



MODEL NUMBER	FINISH	OVERALL HEIGHT	OVERALL LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
LPRO-36-9-2	YELLOW POWDER COAT	9 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	7
LPRO-48-9-2	YELLOW POWDER COAT	9 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	11
LPRO-36-16-2	YELLOW POWDER COAT	16 ³ / ₈ "	36"	1 ¹¹ / ₁₆ "	11
LPRO-48-16-2	YELLOW POWDER COAT	16 ³ / ₈ "	48"	1 ¹¹ / ₁₆ "	14
LPRO-36-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	36 ⁵ / ₈ "	4½"	35
LPRO-48-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	48 ⁵ / ₈ "	4½"	39
LPRO-60-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	60 ⁵ / ₈ "	4½"	51
LPRO-72-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	72 ⁵ / ₈ "	4½"	75
LPRO-92-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	92"	4½"	84
LPRO-144-9-4	YELLOW POWDER COAT	8 ¹⁵ / ₁₆ "	144"	4½"	112
LPRO-36-16-4	YELLOW POWDER COAT	16 ¹⁵ / ₁₆ "	36 ⁵ / ₈ "	4½"	42
LPRO-48-16-4	YELLOW POWDER COAT	16 ¹⁵ / ₁₆ "	48 ⁵ / ₈ "	4½"	46
LPRO-SS-36-9-4	304 STAINLESS STEEL	8 ¹⁵ / ₁₆ "	36 ⁵ / ₈ "	4½"	40
LPRO-SS-48-9-4	304 STAINLESS STEEL	8 ¹⁵ / ₁₆ "	48 ⁵ / ₈ "	4½"	65
LPRO-SS-36-16-4	304 STAINLESS STEEL	16 ¹⁵ / ₁₆ "	36 ⁵ / ₈ "	4½"	41
LPRO-SS-48-16-4	304 STAINLESS STEEL	16 ¹⁵ / ₁₆ "	48 ⁵ / ₈ "	4½"	90
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3" (1 ¹¹ / ₁₆ " UNITS)				1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3" (1 ¹¹ / ₁₆ " UNITS)				4
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4" (4½" UNITS)				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4" (4½" UNITS)				4

Bolt Covers

Bolt Covers are designed to finish and protect bolt threads. They have an easy press fit installation over the existing nut. Molded black plastic construction. Sold in packages only.

MODEL NUMBER	BOLT DIAMETER	FITS HEAD SIZE	QUANTITY PER PACKAGE	WEIGHT (POUND)
BC-BK-38-PK	3/8"	5/8" ID	50	2
BC-BK-12-PK	1/2"	7/8" ID	50	2
BC-BK-34-PK	3/4"	1¼" ID	20	2



model
BC-BK-34-PK

Adjustable Width Rack Guard

Protect the row ends of tandem pallet racking with this heavy-duty, welded steel adjustable rack guard. Slide in design has a variable length range of 62" to 108". Includes steel mounting plates with ten (10) $\frac{7}{8}$ " diameter holes to safely secure unit to floor. Baked-in powder-coated toughness.

MODEL NUMBER	ADJUSTABLE LENGTH	HEIGHT	WEIGHT (POUND)
ARMG-24	62" to 108"	24 $\frac{9}{16}$ "	183
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"		1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"		4



Pallet Rack End Guard

Protect pallet rack frame ends with these heavy duty steel guards. For use with 42" deep frames only. Includes pre-drilled mounting holes. Baked-in powder-coated toughness.


MODEL NUMBER	USABLE WIDTH	HEIGHT	WEIGHT (POUND)
PREG-42	43 $\frac{1}{4}$ "	12 $\frac{1}{2}$ "	89
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"		1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"		4



Floor Stop Bollards

Unique design offers horizontal crash protection. Base plate includes pre-drilled mounting holes. Removable black plastic end caps. Welded steel construction with a baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
FSBOL-24	FLOOR STOP BOLLARD	5"	24 $\frac{3}{8}$ "	4 $\frac{1}{2}$ "	26
FSBOL-36	FLOOR STOP BOLLARD	5"	36 $\frac{3}{8}$ "	4 $\frac{1}{2}$ "	37
FSBOL-42	FLOOR STOP BOLLARD	5"	42 $\frac{3}{8}$ "	4 $\frac{1}{2}$ "	44
FSBOL-48	FLOOR STOP BOLLARD	5"	48 $\frac{3}{8}$ "	4 $\frac{1}{2}$ "	49
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"				1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"				4

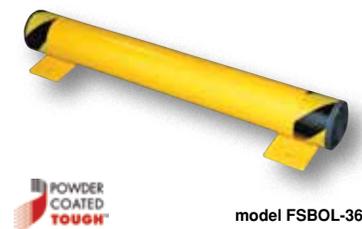

90° Triple Elbow Guards

Protect the corners of machinery, buildings, and offices. The 90° bend fits snug around corners to provide the ultimate protection against potential damage from fork trucks or other mobile equipment. Base plate size is 8" x 8". Welded steel construction. Baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
TEG-24-24-4	TRIPLE ELBOW GUARD	24 $\frac{9}{16}$ "	24 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	96
TEG-24-36-4	TRIPLE ELBOW GUARD	36 $\frac{9}{16}$ "	24 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	108
TEG-24-42-4	TRIPLE ELBOW GUARD	42 $\frac{9}{16}$ "	24 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	116
TEG-30-24-4	TRIPLE ELBOW GUARD	24 $\frac{9}{16}$ "	30 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	108
TEG-30-36-4	TRIPLE ELBOW GUARD	36 $\frac{9}{16}$ "	30 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	114
TEG-30-42-4	TRIPLE ELBOW GUARD	42 $\frac{9}{16}$ "	30 $\frac{5}{8}$ "	4 $\frac{1}{2}$ "	120
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4




Triple Elbow Guards with Center Support

Heavy-duty welded steel construction includes three (3) support legs for extra strength and protection. The 90° bend fits snug around corners to provide the ultimate protection against potential damage from fork trucks or other mobile equipment. Base plate size is 4" x 4" with four (4) $\frac{7}{16}$ " diameter holes. Manufactured from 1 $\frac{5}{8}$ " diameter steel pipe. Baked-in powder-coated toughness.

MODEL NUMBER	HEIGHT	LENGTH	OUTSIDE DIAMETER	WEIGHT (POUND)
TEGC-24-24-2	24"	24"	1 $\frac{5}{8}$ "	56
TEGC-24-36-2	36"	24"	1 $\frac{5}{8}$ "	61
TEGC-24-42-2	42"	24"	1 $\frac{5}{8}$ "	69
TEGC-30-24-2	24"	30"	1 $\frac{5}{8}$ "	66
TEGC-30-36-2	36"	30"	1 $\frac{5}{8}$ "	71
TEGC-30-42-2	42"	30"	1 $\frac{5}{8}$ "	79
AS-383	ANCHOR BOLTS FOR CONCRETE (1) 3/8" x 3"			1
AS-383-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/8" x 3"			4





model TC-30

model TC-28-SD-2R

Traffic Cones

These durable all weather cones are constructed from 100% PVC for long life. Their construction proves maximum resistance to fading and cracking. Will retain its shape for years of reliable service. All models feature one piece mold except model TC-30, which features a removable weighted bottom. High-visibility orange in color. Suffix -2R features two reflectors around the traffic cone.

MODEL NUMBER	DESCRIPTION	HEIGHT	BASE (W x L)	PIECES PER CARTON	WEIGHT (POUND)
TC-30	ECONOMY	30¾"	17¾" x 17¾"	5	57
TC-28-HD-2R	HEAVY DUTY	28⅞"	14¾" x 14¾"	1	11
TC-28-SD-2R	STANDARD DUTY	27½"	14⅞" x 14⅞"	1	7
TC-28-SD	STANDARD DUTY	27½"	14" x 14"	1	8
TC-18-SD	STANDARD DUTY	17¾"	10¾" x 10¾"	1	4



model CCONE-S-1




Traffic Cone Cart

The Traffic Cone Cart is used for transporting and storing traffic cones. The cart is designed with a steel construction and a baked-in powder-coated toughness for strength and durability. The 10" foam filled wheels make transporting cones over rough surfaces easier. Unit holds and displays steel directional signs. Two signs, which are printed on both sides, are included. Brackets are attached for holding high-visibility orange traffic control flags. Cones and flags sold separately. Custom signs available.

MODEL NUMBER	NUMBER OF CONE TIERS	OVERALL SIZE (W x D x H)	USABLE BASE SIZE (W x D)	CAPACITY	WEIGHT (POUND)
CCONE-S-1	SINGLE	26¼"W x 25"D x 48½"H	19" x 16"	200 lb.	95
CCONE-FLAG	OPTIONAL ORANGE TRAFFIC CONTROL FLAG				1

model VGLT-16-4F-Y & VGLT-RT-W

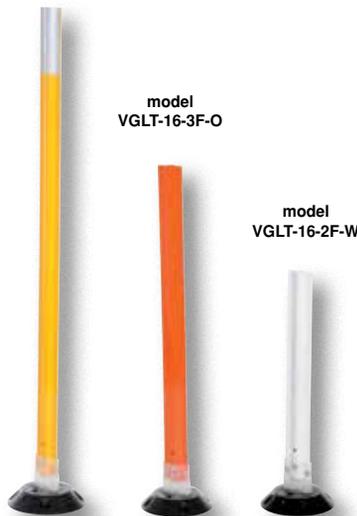

model VGLT-16-3F-O

model VGLT-16-2F-W

Surface Mount Flexible Stakes

Ideal for high traffic and high impact locations. Constructed of polycarbonate extrusion and features a flexible hinge, which makes it virtually indestructible. Easy four part assembly, which is the post and hinge, 8" diameter base, grips, and pin. Quick to install, they can be mounted to concrete, asphalt, wood, and other hard surfaces using appropriate hardware (not included). FAA approved. Other colors and styles are available.

MODEL NUMBER	DESCRIPTION	OVERALL HEIGHT	STAKE WIDTH	COLOR	WEIGHT (POUND)
VGLT-16-2F-W	FLEXIBLE STAKE	24"	3¼"	WHITE	2
VGLT-16-2F-Y	FLEXIBLE STAKE	24"	3¼"	YELLOW	2
VGLT-16-2F-O	FLEXIBLE STAKE	24"	3¼"	ORANGE	2
VGLT-16-3F-W	FLEXIBLE STAKE	36"	3¼"	WHITE	3
VGLT-16-3F-Y	FLEXIBLE STAKE	36"	3¼"	YELLOW	3
VGLT-16-3F-O	FLEXIBLE STAKE	36"	3¼"	ORANGE	3
VGLT-16-4F-W	FLEXIBLE STAKE	48"	3¼"	WHITE	3
VGLT-16-4F-Y	FLEXIBLE STAKE	48"	3¼"	YELLOW	3
VGLT-16-4F-O	FLEXIBLE STAKE	48"	3¼"	ORANGE	3
VGLT-RT-W	REFLECTIVE SHEETING	6"	3"	WHITE	1
VGLT-RT-Y	REFLECTIVE SHEETING	6"	3"	YELLOW	1
VGLT-RT-O	REFLECTIVE SHEETING	6"	3"	ORANGE	1

*SOLD EACH / ONE PER SIDE



model AFB-44



Barricade


Block aisle ways, parking spaces, or other unauthorized access areas with Barricades. Designed for quick set up and convenient storage. The A-Frame Barricade can be filled with water or sand for increased stability. Features three (3) reflectors. Easy to assemble/disassemble and store.



MODEL NUMBER	WIDTH	HEIGHT	BASE WIDTH	WEIGHT (POUND)
AFB-44	44⅝"	31¾"	19½"	9

Stackable Poly Barricades

These portable barriers are ideal for crowd control, area delineation, and security. The unit can be filled with approximately 5.4 gallons of water or sand for added security. Product weight when filled with water is 85 pounds. A centrally placed open handle gives personnel the ability to move unfilled barriers without the need of equipment. Forklift slots on the bottom of the barrier allow for easy transportation while unit is filled. Multiple barriers can be configured and interlocked to make a 90° angle for corner alignment. During storage, barriers can be stacked. Available barrier colors meet ANSI specifications.

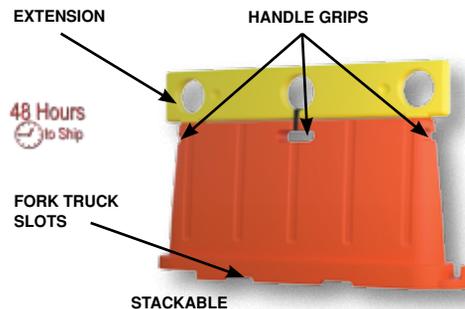

COUPLERS CONNECT MULTIPLE UNITS EITHER STRAIGHT OR AT 90° ANGLES

MODEL NUMBER	LENGTH	DEPTH	HEIGHT	ANSI COLOR	PRODUCT WEIGHT	WEIGHT* (POUND)
BCD-7636-BL	76½"	16"	36"	BLUE	37 lb.	75
BCD-7636-OR	76½"	16"	36"	ORANGE	37 lb.	75
BCD-7636-RD	76½"	16"	36"	RED	37 lb.	75
BCD-7636-WH	76½"	16"	36"	WHITE	37 lb.	75
BCD-7636-YL	76½"	16"	36"	YELLOW	37 lb.	75
BCD-76-EX12-YL	PLASTIC BARRICADE EXTENSION 12"H					9

*SHIPPING WEIGHT

Interlocking Traffic Barriers

The color of these barricades is ideal for applications where appearance is an issue. Displays well at municipalities, parks, amusement parks, and parking areas. Ideal for traffic and crowd control. Lightweight and easy to fill with liquid or sand for added weight. Units interlock to form a line to detour traffic or pedestrians. Features a 4" recessed fill port and 2" tamper resistant drain.



model VTB-6-O



model VTB-6-Y

MODEL NUMBER	OVERALL SIZE (L x D x H)	COLOR	CAPACITY (GALLONS)	WEIGHT FILLED WITH WATER	PRODUCT WEIGHT	WEIGHT* (POUND)
VTB-5-O	60½" x 16¾" x 24½"	ORANGE	72	640 lb.	30 lb.	95
VTB-5-W	60½" x 16¾" x 24½"	WHITE	72	640 lb.	30 lb.	95
VTB-5-Y	60½" x 16¾" x 24½"	YELLOW	72	640 lb.	30 lb.	95
VTB-6-O	74" x 16½" x 34"	ORANGE	112	1,025 lb.	52 lb.	105
VTB-6-W	74" x 16½" x 34"	WHITE	112	1,025 lb.	52 lb.	105
VTB-6-Y	74" x 16½" x 34"	YELLOW	112	1,025 lb.	52 lb.	105

*SHIPPING WEIGHT

Hexagonal Column Guards

Two piece hexagonal column/post guard allows for easy installation. Heavy-duty ¼" thick steel plate construction with a safety yellow baked-in powder-coated toughness. Assembly hardware included. Concrete installation hardware sold separately.



model HEX-48



MODEL NUMBER	OVERALL HEIGHT	FITS COLUMNS MEASURING	WEIGHT (POUND)
HEX-48	48"	11" x 11" SQUARE / 15" ROUND	229
HEX-60	60"	11" x 11" SQUARE / 15" ROUND	272
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"		1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"		4

Gantry/Jib Guard

Prevent costly damage to steel columns, pipe, and tubing from carts and fork trucks. Solid steel design is constructed of ¾" thick material for maximum strength. Ideal for fixed jibs and gantry cranes. Mounting plate measures 17" wide by 13½" deep and features six (6) pre-drilled mounting holes.



model CG-42




MODEL NUMBER	INSIDE WIDTH	INSIDE DEPTH	OVERALL HEIGHT	WEIGHT (POUND)
CG-42	10 ¹³ / ₁₆ "	10 ¹ / ₈ "	42"	180
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



I-BEAM TYPE



SQUARE BEAM

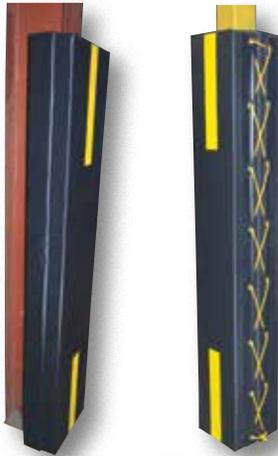

model V-PAD-I-66-Y

CA Residents see WARNING A, Pg. 459



model VB-8



model IBEAM-GRD

Building Protective Column Pads

Protect personnel from workplace injury. Building Protective Column Pads are crafted to maximize protection with three (3) inches of high density foam to compress before any impact. The outside wrap is superior nylon reinforced vinyl. Square beam pads, series V-PAD-S, feature a nylon rope laced through brass grommets to secure the protector to a round or square column. A pleat is folded over and sewn to increase the brass grommet strength. Custom sizes available.

OVERALL HEIGHT	COLUMN SIZE	COLUMN TYPE	WEIGHT (POUND)	BLACK VINYL	YELLOW VINYL
				MODEL NUMBER	MODEL NUMBER
72"	4"	I-BEAM	11	V-PAD-I-64	V-PAD-I-64-Y
72"	5"	I-BEAM	14	V-PAD-I-65	V-PAD-I-65-Y
72"	6"	I-BEAM	17	V-PAD-I-66	V-PAD-I-66-Y
72"	7"	I-BEAM	20	V-PAD-I-67	V-PAD-I-67-Y
72"	8"	I-BEAM	23	V-PAD-I-68	V-PAD-I-68-Y
72"	9"	I-BEAM	26	V-PAD-I-69	V-PAD-I-69-Y
72"	10"	I-BEAM	29	V-PAD-I-610	V-PAD-I-610-Y
72"	11"	I-BEAM	32	V-PAD-I-611	V-PAD-I-611-Y
72"	12"	I-BEAM	35	V-PAD-I-612	V-PAD-I-612-Y
72"	4" x 4"	ROUND/SQUARE	16	V-PAD-S-64	V-PAD-S-64-Y
72"	5" x 5"	ROUND/SQUARE	19	V-PAD-S-65	V-PAD-S-65-Y
72"	6" x 6"	ROUND/SQUARE	22	V-PAD-S-66	V-PAD-S-66-Y
72"	7" x 7"	ROUND/SQUARE	25	V-PAD-S-67	V-PAD-S-67-Y
72"	8" x 8"	ROUND/SQUARE	28	V-PAD-S-68	V-PAD-S-68-Y
72"	9" x 9"	ROUND/SQUARE	31	V-PAD-S-69	V-PAD-S-69-Y
72"	10" x 10"	ROUND/SQUARE	34	V-PAD-S-610	V-PAD-S-610-Y
72"	11" x 11"	ROUND/SQUARE	37	V-PAD-S-611	V-PAD-S-611-Y
72"	12" x 12"	ROUND/SQUARE	40	V-PAD-S-612	V-PAD-S-612-Y
36"	4"	I-BEAM	6	V-PAD-I-34	V-PAD-I-34-Y
36"	5"	I-BEAM	7	V-PAD-I-35	V-PAD-I-35-Y
36"	6"	I-BEAM	9	V-PAD-I-36	V-PAD-I-36-Y
36"	7"	I-BEAM	10	V-PAD-I-37	V-PAD-I-37-Y
36"	8"	I-BEAM	12	V-PAD-I-38	V-PAD-I-38-Y
36"	9"	I-BEAM	13	V-PAD-I-39	V-PAD-I-39-Y
36"	10"	I-BEAM	15	V-PAD-I-310	V-PAD-I-310-Y
36"	11"	I-BEAM	16	V-PAD-I-311	V-PAD-I-311-Y
36"	12"	I-BEAM	18	V-PAD-I-312	V-PAD-I-312-Y
36"	4" x 4"	ROUND/SQUARE	8	V-PAD-S-34	V-PAD-S-34-Y
36"	5" x 5"	ROUND/SQUARE	10	V-PAD-S-35	V-PAD-S-35-Y
36"	6" x 6"	ROUND/SQUARE	11	V-PAD-S-36	V-PAD-S-36-Y
36"	7" x 7"	ROUND/SQUARE	13	V-PAD-S-37	V-PAD-S-37-Y
36"	8" x 8"	ROUND/SQUARE	14	V-PAD-S-38	V-PAD-S-38-Y
36"	9" x 9"	ROUND/SQUARE	16	V-PAD-S-39	V-PAD-S-39-Y
36"	10" x 10"	ROUND/SQUARE	17	V-PAD-S-310	V-PAD-S-310-Y
36"	11" x 11"	ROUND/SQUARE	19	V-PAD-S-311	V-PAD-S-311-Y
36"	12" x 12"	ROUND/SQUARE	20	V-PAD-S-312	V-PAD-S-312-Y

Building Column Protectors

Provide wrap around protection to columns, pipes, and tubing to prevent damage. Constructed of UV protected polyethylene. Units can be stacked two (2) high. Easy to assemble with nylon fasteners included.

MODEL NUMBER	INSIDE OPENING	OUTSIDE WIDTH	OVERALL HEIGHT	UNIFORM CAPACITY (LBS)	WEIGHT (POUND)
VB-6	6" SQUARE	24"	42"	7000 @ 6 MPH	48
VB-8	8 ³ / ₈ " SQUARE	24"	42"	7000 @ 6 MPH	90
VB-10	10 ³ / ₈ " SQUARE	24"	42"	7000 @ 6 MPH	92
VB-12	12 ³ / ₈ " SQUARE	24"	42"	7000 @ 6 MPH	95
VB-8-10	8" x 10" RECT.	24"	42"	7000 @ 6 MPH	48
VB-9R	9" ROUND	24"	42"	7000 @ 6 MPH	95

Polyethylene Ultra I-Beam Protector

I-Beam Protector allows for installation on beams obstructed by walls or other structures. Four (4) guard units completely cover I-Beam (units sold as each). Install multiple units in a "stacked" mode for higher protection from scissor lifts, raised forklifts, and other high-reaching equipment. Specially designed groove allows for quick and easy installation, no straps or fasteners required.

MODEL NUMBER	OVERALL SIZE (L x W x H)	COLOR	WEIGHT (POUND)
IBEAM-GRD	7½" x 8½" x 42"	YELLOW	8

Heavy Duty Column Protectors

Two-piece design for protecting in-plant columns and other vertical support members. Hardware is included to connect both pieces together. Heavy-duty welded steel construction. Each base plate includes four (4) pre-drilled mounting holes. Concrete installation hardware sold separately. Baked-in powder-coated toughness.

MODEL NUMBER	HEIGHT	INSIDE WIDTH	INSIDE LENGTH	WEIGHT (POUND)
CGP-24	24"	20"	20"	125
CGP-36	36"	20"	20"	137
CGP-48	48"	20"	20"	140
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4




Modular Guard Systems

Modular Guard Systems can be ordered to fit almost any application. Designed for quick and easy assembly. Railing sections are installed and secured to each post with a single bolt. Select from different railing lengths to custom fit your application. Railing systems are made from heavy-duty 2 1/2" square steel tubing. Wall mounting posts may be used to secure guard assembly to a wall. Baked-in powder-coated toughness. Steel construction. All components sold separately.

RAILING SECTION				
MODEL NUMBER	EFFECTIVE LENGTH	OVERALL LENGTH	SQUARE TUBE (O.D.)	WEIGHT (POUND)
MG-R-4	48"	56"	2 1/2"	29
MG-R-6	72"	80"	2 1/2"	38
MG-R-8	96"	102"	2 1/2"	49
MG-R-10	120"	128"	2 1/2"	60
MG-R-12	144"	152"	2 1/2"	71

MOUNTING POSTS				
MODEL NUMBER	DESCRIPTION	STYLE	OVERALL HEIGHT	WEIGHT (POUND)
MG-CP-36-1	CORNER POST	SINGLE RAIL	36"	37
MG-CP-36-2	CORNER POST	DOUBLE RAIL	36"	54
MG-SP-36-1	STRAIGHT POST	SINGLE RAIL	36"	37
MG-SP-36-2	STRAIGHT POST	DOUBLE RAIL	36"	68


MOUNTING OPTIONS		
MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
MG-WP-A	WALL MOUNTING POST - Post (2 1/2" x 2 1/2" square tubing, inner fitting)	7
MG-WP-B	WALL MOUNTING POST - Railing (3" x 3" square tubing, outer fitting)	8
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"	1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"	4

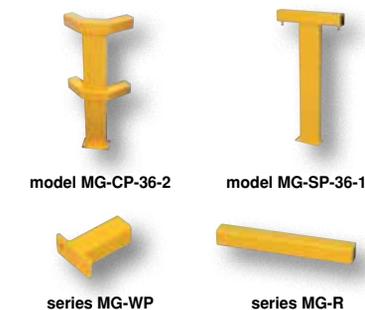

Column Wraps

Column Wraps quickly and effortlessly slide around your square or round columns with its unique locking device. Never paint again, made of polyethylene thermoplastic, which increases column visibility and has low maintenance.

MODEL NUMBER	OVERALL HEIGHT	FITS COLUMNS MEASURING	DESCRIPTION	COLOR	WEIGHT (POUND)
VCW-RD-RND	60"	8"	ROUND	RED	16
VCW-GY-RND	60"	8"	ROUND	GRAY	16
VCW-RD-11-SQ	60"	11"	SQUARE	RED	14
VCW-GY-11-SQ	60"	11"	SQUARE	GRAY	14
VCW-YL-11-SQ	60"	11"	SQUARE	YELLOW	14
VCW-RD-20-SQ	60"	20"	SQUARE	RED	14
VCW-GY-20-SQ	60"	20"	SQUARE	GRAY	14
VCW-YL-20-SQ	60"	20"	SQUARE	YELLOW	14

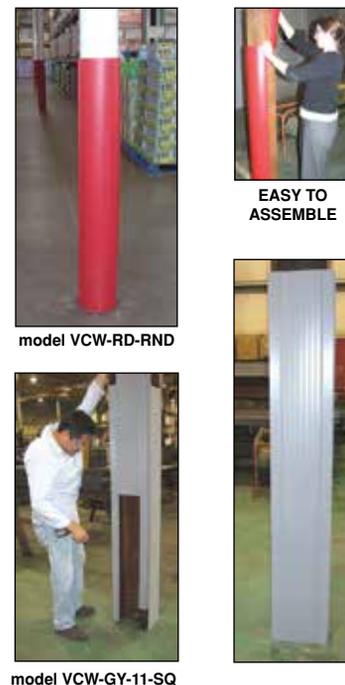



SIGNS SOLD SEPARATELY

model PYSB-W-Y

model OSB-B

Sign Base Systems

Give your property that brand new look for years to come! Save time on installation and no core drilling or anchor assembly required. Pyramid base can be conveniently rolled out of the way for parking lot maintenance and snow removal. Made with 1/4" low density polyethylene, which has ultra-violet and anti-static additives for long lasting, maintenance free use. Bases can be filled with concrete, sand, or up to twenty two (22) gallons of water (1 1/2 gallons model OSB). Steel pipe sleeved with high-density thermoplastic included with bases. Supports various signs (not included), see Facility Maintenance supplement. Post is removable from base for easy storage.

MODEL NUMBER	BASE DIMENSIONS (W x D x H)	WHEELS	OVERALL HEIGHT	POST DIAMETER	COLOR	WEIGHT (POUND)
PYSB-Y	22" x 22" x 22"	NO	98"	1.6"	YELLOW	46
PYSB-R	22" x 22" x 22"	NO	98"	1.6"	RED	46
PYSB-B	22" x 22" x 22"	NO	98"	1.6"	BLUE	46
PYSB-BK	22" x 22" x 22"	NO	98"	1.6"	BLACK	46
PYSB-W-Y	22" x 22" x 22"	YES	98"	1.6"	YELLOW	46
PYSB-W-R	22" x 22" x 22"	YES	98"	1.6"	RED	46
PYSB-W-B	22" x 22" x 22"	YES	98"	1.6"	BLUE	46
PYSB-W-BK	22" x 22" x 22"	YES	98"	1.6"	BLACK	46
OSB-R	8"W side x 20"H base	NO	98"	1.6"	RED	46
OSB-B	8"W side x 20"H base	NO	98"	1.6"	BLUE	46
OSB-GN	8"W side x 20"H base	NO	98"	1.6"	GREEN	46
OSB-BRN	8"W side x 20"H base	NO	98"	1.6"	BROWN	46



48 Hours to Ship

SIGNS SOLD SEPARATELY

model S-STAND

model S-STAND-W

Sign Stands

Display your signs anywhere. Surface mounted with a weighted base. Includes three (3) holes, 9/16" diameter with 1 3/8" diameter counter-bore for permanent mounting of sign. Removable post will accept virtually any sign (signs available, see Facility Maintenance supplement). Available with or without wheels. Wheels allow you to tip and roll unit. Steel construction.

MODEL NUMBER	DESCRIPTION	HEIGHT	BASE DIAMETER	WEIGHT (POUND)
S-STAND	NO WHEELS	48"	18"	17
S-STAND-W	WHEELS INCLUDED	48"	18"	22
AS-125	ANCHOR BOLTS (1) 1/2" x 5", (3) BOLTS NEEDED			1

Portable & Permanent Sign Bases

Sign Bases are perfect for parking garages, parking lots, retail establishments, school crossings, and high traffic pedestrian walkways. A lightweight and more durable option to steel, these signs are designed to take vehicle impacts and low speed roll-overs without causing damage to the post or vehicle. The recycled base, series FSP-BASE, is perfect for short term applications or when a rapid deployment is necessary. Permanent sign posts with circular bases can be anchored with 1/4" lag bolts (not included). Other post heights and signs are available, contact factory for pricing.



PORTABLE SIGN POST, model FSP-24-W
BASE & INSERT, model FSP-BASE-L
TUBULAR FLEX INSERT, model FSP-INSERT



SIGNS SOLD SEPARATELY

HANDLES

model FSP-BASE-L

model FSP-36-W-PS

MODEL NUMBER	OVERALL HEIGHT	POST DIAMETER	COLOR	WEIGHT (POUND)
PORTABLE SIGN POSTS (ONLY)				
FSP-24-O	24"	2"	ORANGE	1
FSP-24-Y	24"	2"	YELLOW	1
FSP-24-W	24"	2"	WHITE	1
FSP-36-O	36"	2"	ORANGE	1
FSP-36-Y	36"	2"	YELLOW	1
FSP-36-W	36"	2"	WHITE	1
FSP-48-O	48"	2"	ORANGE	1
FSP-48-Y	48"	2"	YELLOW	1
FSP-48-W	48"	2"	WHITE	1
PORTABLE SIGN POST BASES & INSERT				
FSP-BASE-L	LARGE BASE WITH HANDLE (30"W x 14"L x 2"H)			33
FSP-BASE-S	SMALL BASE WITH NO HANDLE (17"W x 18"L x 1"H)			11
FSP-INSERT	TUBULAR FLEX INSERT ONLY			1
PERMANENT SIGN POSTS WITH CIRCULAR BASE (ANCHOR HARDWARE NOT INCLUDED)				
FSP-24-O-PS	24"	2"	ORANGE	3
FSP-24-Y-PS	24"	2"	YELLOW	3
FSP-24-W-PS	24"	2"	WHITE	3
FSP-36-O-PS	36"	2"	ORANGE	3
FSP-36-Y-PS	36"	2"	YELLOW	3
FSP-36-W-PS	36"	2"	WHITE	3
FSP-48-O-PS	48"	2"	ORANGE	3
FSP-48-Y-PS	48"	2"	YELLOW	3
FSP-48-W-PS	48"	2"	WHITE	3

Structural Rack Guards

Economical way to protect against damage to pallet racking and wall corners. Constructed of 6" or 8" cast steel for durability. Available with or without a rubber bumper. Easy to install to concrete surface. Four mounting holes for maximum stability. Safety yellow baked-in powder-coated toughness. Models G6 require 1/2" anchor bolts. Models G8 require 3/4" anchor bolts. Installation hardware sold separately.

MODEL NUMBER	OVERALL HEIGHT	USABLE OPENING (W x D)	OVERALL BASE (W x D)	WEIGHT (POUND)
STRUCTURAL RACK GUARDS				
G6-12	12¼"	4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	8 ¹ / ₁₆ " x 6"	12
G6-18	18¼"	4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	8 ¹ / ₁₆ " x 6"	16
G6-24	24¼"	4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	8 ¹ / ₁₆ " x 6"	22
G6-36	36¼"	4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	8 ¹ / ₁₆ " x 6"	31
G8-12	12¼"	6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	13
G8-18	18¼"	6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	21
G8-24	24¼"	6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	28
G8-36	36¼"	6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	37
STRUCTURAL RACK GUARDS WITH RUBBER BUMPERS				
G6-12-B	12¼"	4 ⁹ / ₁₆ " x 2 ⁷ / ₈ "	8 ¹ / ₁₆ " x 6"	19
G6-18-B	18¼"	4 ⁹ / ₁₆ " x 2 ⁷ / ₈ "	8 ¹ / ₁₆ " x 6"	25
G6-24-B	24¼"	4 ⁹ / ₁₆ " x 2 ⁷ / ₈ "	8 ¹ / ₁₆ " x 6"	42
G6-36-B	36¼"	4 ⁹ / ₁₆ " x 2 ⁷ / ₈ "	8 ¹ / ₁₆ " x 6"	44
G8-12-B	12½"	6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	23
G8-18-B	18½"	6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	38
G8-24-B	24½"	6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	51
G8-36-B	36½"	6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ "	10 ¹ / ₁₆ " x 6"	53
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5" (G6 UNITS)			1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5" (G6 UNITS)			4
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4" (G8 UNITS)			1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4" (G8 UNITS)			4



STRUCTURAL RACK GUARDS



STRUCTURAL RACK GUARDS WITH RUBBER BUMPERS

Low Profile Rack Guards

Protect pallet racking and wall corners against damage from fork trucks, pallet trucks, and carts with Low Profile Rack Guards. All components are laser cut. Quick and easy two (2) hole installation. Installs in half the time of other guards. Safety yellow baked-in powder-coated toughness. Steel construction. Installation hardware sold separately.

MODEL NUMBER	OVERALL HEIGHT	USABLE OPENING (W x D)	OVERALL BASE (W x D)	WEIGHT (POUND)
NPG4-12	11 ⁷ / ₈ "	4¼" x 1"	8" x 3"	5
NPG4-18	17 ⁷ / ₈ "	4¼" x 1"	8" x 3"	7
NPG4-24	23 ⁷ / ₈ "	4¼" x 1"	8" x 3"	9
NPG4-36	35 ⁷ / ₈ "	4¼" x 1"	8" x 3"	15
NPG6-12	11 ⁷ / ₈ "	6¼" x 1"	10" x 3"	7
NPG6-18	17 ⁷ / ₈ "	6¼" x 1"	10" x 3"	8
NPG6-24	23 ⁷ / ₈ "	6¼" x 1"	10" x 3"	11
NPG6-36	35 ⁷ / ₈ "	6¼" x 1"	10" x 3"	16
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"			1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"			4



model NPG4-12

model NPG6-36

Corner Guards

Protect busy corners, expensive machinery, and personnel with 90° perpendicular protection. "SAFETY FIRST" promotion reminds personnel of the number one priority. Steel units include baked-in powder-coated toughness. Aluminum unit is unfinished. Installation hardware sold separately.



model PCG-24

MODEL NUMBER	OVERALL HEIGHT	OVERALL LENGTH	SIDE HEIGHT	MATERIAL	WEIGHT (POUND)
PCG-16	16"	16"	8"	STEEL	26
PCG-16-A	16"	16"	8"	ALUMINUM	8
PCG-24	24"	24"	12¼"	STEEL	59
PCG-24-A	24"	24"	12"	ALUMINUM	10
AS-344	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"				1
AS-344-4PK	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"				4



model PCG-24-A



model VPRP-YL-12



48 Hours
to Ship

POWDER
COATED
TOUGH

model RUD-24



Rack Shields

Easy one-step installation, these Rack Shields eliminate painting and prevent damage to your vertical supports. Made of extruded high-density polyethylene thermoplastic. Installation hardware not included.

MODEL NUMBER	OVERALL HEIGHT	USABLE SIZE (W x D)	COLOR	WEIGHT (POUND)
VPRP-YL-09	9"	3" x 2"	YELLOW	2
VPRP-YL-12	12"	3" x 2"	YELLOW	2
VPRP-YL-18	18"	3" x 2"	YELLOW	4
VPRP-GY-09	9"	3" x 2"	GRAY	2
VPRP-GY-12	12"	3" x 2"	GRAY	2
VPRP-GY-18	18"	3" x 2"	GRAY	4
VPRP-BK-09	9"	3" x 2"	BLACK	2
VPRP-BK-12	12"	3" x 2"	BLACK	2
VPRP-BK-18	18"	3" x 2"	BLACK	4

Rack Guards with Rubber Bumper Insert

Protect pallet racking with durable wrap around protection. Increase pallet rack column strength on impact by over 100%. Includes a 1/2" thick rubber bumper and hardware. Easy to install with wrench or socket. No concrete drilling required. Steel construction. Baked-in powder-coated toughness.

MODEL NUMBER	OVERALL SIZE (W x D)	USABLE OPENING (W x D) W/BUMPER	OVERALL HEIGHT	WEIGHT (POUND)
RUD-24	3 ³ / ₈ " x 4 ⁷ / ₈ "	3 ¹ / ₈ " x 4 ³ / ₄ "	24"	13
RUD-36	3 ³ / ₈ " x 4 ⁷ / ₈ "	3 ¹ / ₈ " x 4 ³ / ₄ "	36"	18
RUD-48	3 ³ / ₈ " x 4 ⁷ / ₈ "	3 ¹ / ₈ " x 4 ³ / ₄ "	48"	23

Polyethylene Rack Protector

Protect warehouse racking from damage from forklifts, pallet jacks, and other equipment. Heavy-duty magnet holds unit securely in place. No hardware required for installation. Polyethylene construction is maintenance free, no painting or upkeep required. Safety yellow color with contrasting black warning stripes provides excellent visual reference for drivers and other warehouse personnel.

MODEL NUMBER	OVERALL SIZE (W x D x H)	USABLE OPENING SIZE	WEIGHT (POUND)
VMRP-15	5 ³ / ₈ " x 3 ¹ / ₄ " x 15 ¹ / ₂ "	4"	7



48 Hours
to Ship



High Impact Plastic Upright Rack Guard

Impact resistant blended polyethylene outer shell. Internal shock absorbing pad for added protection. Double stack for extra height protection. Does not require bolting to the floor. Quickly attaches to pallet rack frame with two (2) zip ties, included. High visibility fluorescent yellow color.

MODEL NUMBER	OVERALL SIZE (W x D x H)	FITS FRAME WIDTH	WEIGHT (POUND)
PRUD-20-2833	3 ⁵ / ₈ " x 3" x 19 ¹ / ₄ "	2 ⁵ / ₈ " to 3 ¹ / ₄ "	3

Foam Edge Guards

Foam Edge Guard provides added protection when necessary. Each guard is manufactured from flexible foam that conforms to slightly irregular angles and surfaces. Black and yellow alert striping. Mounts with self-adhesive strips. Easy to cut to custom lengths.




48 Hours
to Ship

MODEL NUMBER	OVERALL SIZE (W x L x H)	SLOT SIZE (W x H)	WEIGHT (POUND)
FEG-A	1 ¹ / ₂ " dia. x 40"	5 ¹ / ₁₆ " x 3 ³ / ₄ "	1
FEG-B	2 ³ / ₈ " x 40" x 1 ³ / ₁₆ "	N/A	1
FEG-C	1 ¹ / ₂ " x 40" x 1 ¹ / ₂ "	5 ¹ / ₁₆ " x 3 ³ / ₄ "	1
FEG-D	1 ¹ / ₂ " x 40" x 1 ¹ / ₂ "	1" x 1"	1
FEG-E	1 ¹ / ₂ " dia. x 40"	3 ³ / ₄ " x 3 ³ / ₄ "	1

PVC Plastic Corner Protectors

Provides for quick and easy corner protection. Made from 1/16" thick PVC plastic material. Designed for indoor use only. Durable and attractive. Securely attach to corner with glue or construction adhesive (not included). Holes may also be drilled to allow for bolt-on installation (hardware not included).

MODEL NUMBER	STYLE ANGLE	COLOR	ARM LENGTH	OVERALL HEIGHT	WEIGHT (POUND)
PVC-48-WH [Ⓢ]	90°	WHITE	2" x 2"	48"	2
PVC-48-GY [Ⓢ]	90°	GRAY	2" x 2"	48"	2
PVC-48-BG [Ⓢ]	90°	BEIGE	2" x 2"	48"	2
PVC-48R-WH [Ⓢ]	90° ROUNDED	WHITE	3" x 3"	48"	2
PVC-48R-GY [Ⓢ]	90° ROUNDED	GRAY	3" x 3"	48"	2
PVC-48R-BG [Ⓢ]	90° ROUNDED	BEIGE	3" x 3"	48"	2

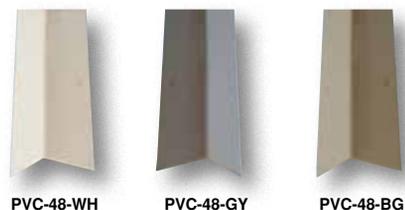

PVC-48-WH

PVC-48-GY

PVC-48-BG



PVC-48R-WH


PVC-48R-GY

PVC-48R-BG

PVC Plastic Corner Protectors (Aluminum Insert)

Provides for quick and easy corner protection. Durable design with attractive appearance. External shell made from 1/16" PVC plastic. Inner structure made from 1/16" aluminum. Insert is pre-drilled for use with 3/16" screws. Four (4) holes on one side, five (5) holes on the other side, nine (9) holes total. Installation hardware is not included. 90° angle design (not rounded).

MODEL NUMBER	STYLE ANGLE	COLOR	ARM LENGTH	OVERALL HEIGHT	WEIGHT (POUND)
PVC-A-2-WH [Ⓢ]	90°	WHITE	2" x 2"	48"	2
PVC-A-2-GY [Ⓢ]	90°	GRAY	2" x 2"	48"	2
PVC-A-2-BG [Ⓢ]	90°	BEIGE	2" x 2"	48"	2
PVC-A-3-WH [Ⓢ]	90°	WHITE	3" x 3"	48"	3
PVC-A-3-GY [Ⓢ]	90°	GRAY	3" x 3"	48"	3
PVC-A-3-BG [Ⓢ]	90°	BEIGE	3" x 3"	48"	3

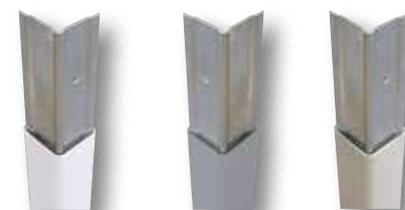

PVC-A-2-WH

PVC-A-2-GY

PVC-A-2-BG

48 Hours
to Ship



SS-48

SS-48R

Stainless Steel Corner Guards

Provides for quick and easy corner protection. Excellent corrosion resistance. Made from 1/16" thick type 304 stainless steel. Mounting hardware/adhesive is NOT included.

MODEL NUMBER	STYLE ANGLE	ARM LENGTH	OVERALL HEIGHT	WEIGHT (POUND)
SS-48 [Ⓢ]	SQUARE	3½" x 3½"	48"	7
SS-48R [Ⓢ]	ROUNDED	3½" x 3½"	48"	6

Corner Protectors

Heavy-duty corner protectors are designed to protect corners from damage. Versatile protection for warehouses, offices, overhead door frames and tracks, or any 90° corner.

Corner Protector, model VCP-42U, stop costly damage to facility corners and walls. Safety yellow, polyethylene unit maintains appearance without constant upkeep. Hardware kit is included to make installation into any wall surface quick and easy.

Molded Rubber Corner Protectors, series MRCG, are made from black molded rubber. A corner protector includes reflective safety yellow tape model MRCG-39, green model MRCG-20 for higher visibility. No pre-drilled holes.

PVC Corner Guards, model YCG-12, has a clean and attractive appearance with black and yellow safety stripes for greater visibility. Multiple guards may be installed end-to-end, 48^{25/32}" overall height, for greater coverage. Sixteen (16) screws/anchors included for installation. Four (4) pieces per package.

Aluminum Treadplate Corner Protectors, series TPCG, provide corner protection with a durable and attractive non-marking diamond plate material. Install with construction adhesive and pre-drilled holes for anchoring (adhesive and hardware not included).

MODEL NUMBER	OVERALL HEIGHT	FLANGE WIDTH	DRYWALL ANCHORS	MATERIAL	WEIGHT (POUND)
VCP-42U	42"	4"	INCLUDED	POLY	7
MRCG-20 [Ⓢ]	20"	5½"	NOT INCLUDED	RUBBER	5
MRCG-39 [Ⓢ]	39"	6"	NOT INCLUDED	RUBBER	9
YCG-12 [Ⓢ]	12½"	4"	INCLUDED	PVC	2
TPCG-36	36"	3"	NOT INCLUDED	ALUMINUM	7
TPCG-48	48"	3"	NOT INCLUDED	ALUMINUM	9
TPCG-60	60"	3"	NOT INCLUDED	ALUMINUM	11



VCP-42U

48 Hours
to Ship




MRCG-20



MRCG-39



YCG-12



48 Hours
to Ship

TPCG-60



Manhole Guard Rail

The Manhole Guard Rail is perfect for utility maintenance and city officials. The simple set up and take down promotes quick use when on the go and a compact storage when not in use. High rails and an attaching chain limit access and promote safety to the worker in the enclosed area. A brightly colored high strength construction makes the unit highly visible, giving caution to pedestrians and other workers to keep their distance.

MODEL NUMBER	OVERALL SIZE (W x L x H)	USABLE SIZE (W x L)	WEIGHT (POUND)
MHGR-32	33 ⁵ / ₈ " x 32 ⁵ / ₈ " x 44 ¹ / ₈ "	31" x 30"	105



model VWP-48

Polyethylene Wall Protector

The Wall Protector is ideal for manufacturing and shipping facilities. The polyethylene construction is designed to be resistant through the harshest of conditions. The yellow color provides visibility for the utmost safety. To use, simply place at the desired height and attach to the selected wall. Hardware included, three (3) masonry screws, three (3) regular screw and washers.

MODEL NUMBER	DESCRIPTION	OVERALL (W x H)	PROJECTION	WEIGHT (POUND)
VWP-48	WALL PROTECTOR	48" x 6"	2"	7



model LPBP-24-BLACK

Light Pole Base Protectors

Quickly and inexpensively enhance the visual appearance of your parking lot and lower your long term maintenance costs, while offering safety to your customers and their cars. Designed to fit around a 24" diameter light pole base. The ring assembly allows it to fit any height, and the top is easily customized to fit round or square light poles. Each ring is 9¹/₂" high. Unit comes in half circles that are snapped together around the base and then stacked on top of each other. **When ordering specify light pole diameter for top piece.**

MODEL NUMBER	COLOR	CEMENT BASE DIAMETER	OVERALL HEIGHT	WEIGHT (POUND)
LPBP-24-YL	SAFETY YELLOW	24"	41"	28
LPBP-24-SBU	SAFETY BLUE	24"	41"	28
LPBP-24-IBU	IMPERIAL BLUE	24"	41"	28
LPBP-24-BK	BLACK	24"	41"	28



model DWB-88

Economical Overhead Door Warning Barriers

Protect overhead doors from fork trucks and other traffic coming and going throughout each day. Intended for use as a warning system - not a fork truck stop. Constructed with tubular steel uprights and a 4" x 4" wooden beam across the top of the guard. The wooden beam can be easily and inexpensively replaced when damaged. Guard will not interfere with overhead door. Complete unit is painted high visibility OSHA safety yellow. Concrete installation kit available.

MODEL NUMBER	USABLE DOOR WIDTH (FT.)	USABLE DOOR HEIGHT (FT.)	COLOR	WEIGHT (POUND)
DWB-88	8	8	YELLOW	358
DWB-810	8	10	YELLOW	475
DWB-910	9	10	YELLOW	490
DWB-1010	10	10	YELLOW	505
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"			1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"			4



Overhead Door Warning Barriers

Protect overhead doors from fork truck damage. Heavy-duty PVC construction is light-weight and will not rust. Highly visible black and yellow safety STRIPES and two American flags serve as a visual warning. Includes two (2) 15' long chains with quick connects to hang barrier from ceiling or existing overhead door track.

Model ODG-133-BL features built-in warning sirens and flashing lights that activate when the barrier is bumped or contacted. Provides an audible and visual warning before damage to overhead door is caused. 76 DB at 9 feet. Requires four (4) 9V lithium batteries, not included.

MODEL NUMBER	DESCRIPTION	OVERALL LENGTH	WEIGHT (POUND)
ODG-121-F	ECONOMY WARNING BARRIER	120"	63
ODG-133-BL	DELUXE WARNING BARRIER	120"	66



ECONOMY WARNING BARRIER • model ODG-121-F



DELUXE WARNING BARRIER • model ODG-133-BL

Clearance Bars

Clearance Bars are low maintenance, highly visible, and simple to read. These easy to install clearance bars are made of 1/4" nominal wall low-density polyethylene. Comes with eye hooks attached, chain not included. Model's CLB-5-78L and CLB-5-110L are customizable up to fifteen characters. When no specifications are provided CLB-5-78L reads CLEARANCE 78", and CLB-5-110L CLEARANCE 110". Other colors, specified lettering and additional characters available, contact factory.

MODEL NUMBER	OUTSIDE DIAMETER	LENGTH	LETTERING	COLOR	WEIGHT (POUND)
CLB-5-78P	5 1/4"	78"	NO	YELLOW	18
CLB-5-78L	5 1/4"	78"	YES	YELLOW	18
CLB-7-110P	7 1/2"	110"	NO	YELLOW	85
CLB-7-110L	7 1/2"	110"	YES	YELLOW	85



model CLB-5-78L

Automatic Overhead Door Lock

Unique product will allow overhead doors to be locked in virtually any up position. Automatically locks doors in full up position or in the closed position. Prevents the overhead door from unexpectedly "slamming down". Protects personnel, product, and equipment. Spring-loaded locking latch is released by pulling rope (included). Simply bolts to any overhead door (installation hardware is not included). Includes two (2) reversible "locking plates" that may be mounted anywhere along door track. Heavy-duty welded steel construction with yellow baked-in powder-coated toughness.

MODEL NUMBER	DESCRIPTION	COLOR	WEIGHT (POUND)
DR-LOCK	OVERHEAD DOOR LOCK	YELLOW	3



model DR-LOCK

Overhead Door Track Protectors

Protect the tracks of overhead doors from fork trucks, pallet trucks, and other traffic with these solid steel constructed economical Overhead Door Track Protectors. The base plate is 6" square with a 3" notch out and 9/16" diameter mounting holes. Installation hardware sold separately. Baked-in powder-coated toughness for long term wear. Steel construction.


MODEL NUMBER	HEIGHT	BASE PLATE SPECIFICATIONS	MOUNTING HOLE DIAMETER	WEIGHT (POUND)
DSP-24	24 1/4"	6" SQUARE 3" NOTCH OUT	9/16"	13
DSP-36	36 1/4"	6" SQUARE 3" NOTCH OUT	9/16"	18
DSP-48	48 1/4"	6" SQUARE 3" NOTCH OUT	9/16"	19
AS-125	ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5"			1
AS-125-4PK	ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5"			2



model DSP-36



MECHANICAL • DJG-100MW

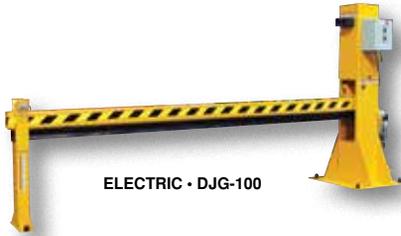


ELECTRIC • DJG-100

Dock Barricades - Designed to Prevent Loading Dock "Run Off's" 115V 1-PHASE

Dock Barricades represent the next generation of innovative loading dock safety systems. The electric/hydraulic power unit provides quick and effortless operation. It can stop a four thousand (4,000) pound loaded truck at four (4) miles per hour. It is electronically operated and consists of an electrical bumper-style safety stop circuit to sense obstructions when lowering. Installation is simple, anchor the unit to the floor, mount the control on the wall and plug in. Mechanical unit, model DJG-100MW, features a manual hand crank winch to raise/lower barricade arm. All units include a lock bar on the arm post to restrict rotation of the barricade arm, padlock is not included.

MODEL NUMBER	DOOR SIZE (W x H)	ARM HEIGHT RAISED	ARM HEIGHT LOWERED	OVERALL (W x L)	WEIGHT (POUND)
DJG-100*	8' x 8'	148 ⁵ / ₈ "	28 ¹ / ₂ "	24" x 130 ³ / ₄ "	754
DJG-100-10*	10' x 10'	172 ⁵ / ₈ "	28 ¹ / ₂ "	24" x 154 ³ / ₄ "	765
DJG-100MW	8' x 8'	149"	32"	24" x 133 ¹ / ₄ "	539

*ELECTRIC HYDRAULIC POWERED UNITS

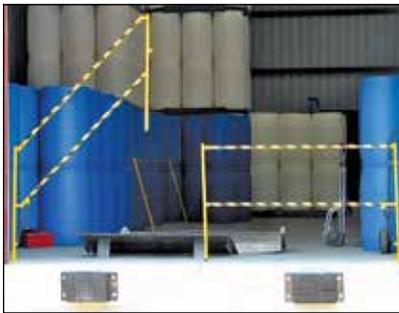


TWO SIX FOOT SECTIONS SHOWN

Safety Lift Gates

Simply lift and the self folding action folds the gate in a vertical position. With the assistance of the air assist cylinder the gate can be lifted with the slightest effort. The Lift Gate is manufactured of steel tubing with a yellow baked-in powder-coated toughness. Unit can be either wall or floor mounted. Ideal on loading dock doors to help reduce the possibility of people falling.

MODEL NUMBER	LENGTH	BASE PLATE (W x L)	HORIZONTAL UPPER BAR HEIGHT	OVERALL HEIGHT RAISED	WEIGHT (POUND)
SLG-6	6'	4" x 4"	42 ⁵ / ₈ "	111"	20
SLG-8	8'	4" x 4"	42 ⁵ / ₈ "	135"	30
SLG-10	10'	4" x 4"	42 ⁵ / ₈ "	159"	33

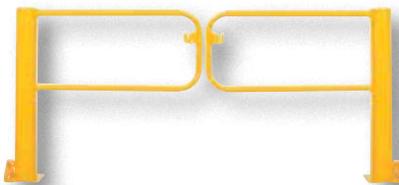

Swivel Dock Gates

Swivel Dock Gates are ideal for securing loading docks, parking lots or pathways. The gate features a steel construction for durability and a yellow powder coat finish for clear visibility. An attachable swing stop is added to the base of each bollard to reduce the wing length of gate arms, and to change the direction of gate swing. A chain slot is also attached to the end of each gate arm for the option of added security. All models come in pairs. Units have pre-drilled mounting holes for easy installation.



SECURE GATE IN OPEN OR CLOSED POSITION WITH PADLOCK (NOT INCLUDED).



Economical Safety Swing Gate

An economical way to protect people from dock falls. Durable railings are constructed from schedule 10 pipe (1¹/₂" O.D.). Units have a top rail height of 46¹/₄" and a 25" mid-rail. 4" poly-on-poly wheel allows units to be swung out of the way. Foot release lock keeps the railing from being moved when in use. Cast single socket is included. Yellow baked-in powder-coated toughness.

MODEL NUMBER	MATERIAL	OPENING WIDTH	HEIGHT	WEIGHT (POUND)
SSG-9	STEEL	108"	46 ¹ / ₄ "	105
SSG-11	STEEL	132"	46 ¹ / ₄ "	138



Dock Chain Bollard Barrier Systems

The Dock Chain Bollard Barriers create a safe environment for both personnel and products. The steel constructed double chain design adds extra security for doors up to 10'. Unit is designed with a safety yellow baked-in powder-coated toughness for clear visibility, and a bolt on chain hook-up enabling a quick installation or removal. Chains are mounted at 21" and 42" high on the bollard and the chain can be cut to size upon request. Series DCBB-42 include two (2) bollards, two (2) 127" long chains and one (1) DCBB-B-KIT. Concrete anchor hardware available separately.

Customers wanting to convert their existing bollards into a barrier system will need to order model *DCBB-B-KIT* and drill holes for mounting. Kit includes four (4) mounting brackets, sixteen (16) self-tapping screws, one (1) post weldment bracket, four (4) quick links for chain, one (1) chain post handle and hardware. Customer will also need to order model *BOL-CHAIN* and specify how many feet they require (sold per foot). Be sure to order more total feet than the opening to allow for some chain slack.

MODEL NUMBER	OVERALL HEIGHT	BOLLARD DIAMETER	ACCOMMODATES DOOR SIZE	WEIGHT (POUND)
DCBB-42-4.5 [Ⓢ]	42"	4.5"	10 FOOT	65
DCBB-42-5.5 [Ⓢ]	42"	5.5"	10 FOOT	80
DCBB-B-KIT [Ⓢ]	BOLLARD CONVERSION KIT			2
BOL-CHAIN	3/16" STEEL POWDER COAT CHAIN (SOLD PER FOOT)			1
AS-344 [Ⓢ] ✓	ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4"			1
AS-344-4PK [Ⓢ] ✓	ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4"			4



Mobile Safety Barrier

Strong durable molded plastic construction is lightweight and easy to move. Gate is held in closed position with black elastic cords. Gate is easily extended to position where needed. Molded from high-visibility yellow plastic. Tilt and roll on two 5" diameter wheels (closed position only). Top includes comfortable molded hand grips.

MODEL NUMBER	COLLAPSED WIDTH	EXPANDED WIDTH	OVERALL DEPTH	OVERALL HEIGHT	WEIGHT (POUND)
MSB-138 [Ⓢ]	23"	138"	13"	40"	40

Multi-Purpose Barricades

These polyethylene plastic barricades can be linked together to enclose any shape or size area. They are lightweight and fold away for easy storage. Made from durable polyethylene plastic and are suitable for both indoor and outdoor applications. The barricades are easy to clean and are bright yellow for high visibility. Permanent mold-in graphic of caution sign is standard. Available in two and three panel units.

MODEL NUMBER	WIDTH OF EACH PANEL	HEIGHT	LENGTH	THICKNESS	NUMBER OF PANELS	WEIGHT (POUND)
HG-2F	37"	36"	74"	1"	2	15
HG-3F	37"	36"	111"	1"	3	23



model HG-3F




Folding Fabric Barrier

Lightweight, portable Folding Fabric Barrier is ideal for alerting individuals not to go into a designated area. Fabric material is water and mildew resistant polyester. Features an alert green/yellow fabric with a "SAFETY FIRST" marking. Three section design allows the unit to be folded into various configurations. Individual section thickness is 1", while the folded storage profile is 3½" thick. Gray tubular construction.

MODEL NUMBER	WIDTH OF EACH PANEL	OVERALL HEIGHT	OVERALL LENGTH	THICKNESS	NUMBER OF PANELS	WEIGHT (POUND)
FBR-3 [Ⓢ]	22½"	38"	69"	1"	3	12



model FBR-3

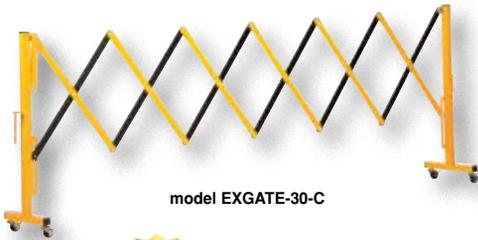

model EXGATE-30-C



RETRACTS FOR EASY TRANSPORT



model EXGATE-30



model PEXGATE-30

Expand-A-Gates

Designed to set up quickly and easily wherever and whenever they are needed. Ideal for preventing potential accidents. Lightweight design allows personnel to quickly retrieve the gate and limit access to unsafe areas. Smooth operating scissor action. Interlocking and nestable. Suffix -C features casters. Suffix -W features one (1) swivel caster with a wall/rack mounting kit.

Model PEXGATE is constructed of heavy-duty molded yellow and black plastic. One side of gate includes reflectors for better visibility. End pieces are hollow and may be filled with liquid for added weight. Assembly required.

MODEL NUMBER	COLLAPSED WIDTH	EXPANDED WIDTH	*OVERALL HEIGHT	WEIGHT (POUND)
STEEL CONSTRUCTION				
EXGATE-30 [Ⓢ]	19¾"	139"	38"	55
EXGATE-30-C [Ⓢ]	19¾"	139"	40 ¹ / ₈ "	57
EXGATE-30-W+ [Ⓢ]	20 ⁵ / ₁₆ "	139"	38 ⁵ / ₁₆ "	61
EXGATE-W-KIT	WALL MOUNT KIT			5
ALUMINUM CONSTRUCTION				
ALEXGATE-30 [Ⓢ]	19¾"	139"	38"	25
ALEXGATE-30-C [Ⓢ]	19¾"	139"	40 ¹ / ₈ "	30
ALEXGATE-30-W+ [Ⓢ]	20 ⁵ / ₁₆ "	139"	38 ⁵ / ₁₆ "	34
ALEXGATE-W-KIT	WALL MOUNT KIT			5
PLASTIC CONSTRUCTION				
PEXGATE-30 [Ⓢ]	11½"	122"	38"	12
PEXGATE-30-C [Ⓢ]	11½"	122"	40¾"	13

*OVERALL HEIGHT WHEN COLLAPSED
+ INCLUDES W-KIT STANDARD



model EXGATE-30-W




Connector for wall mounted unit



PLASTIC UNIT IS EASY TO FILL FOR ADDED WEIGHT



ASSEMBLY REQUIRED ON MODEL PEXGATE-30

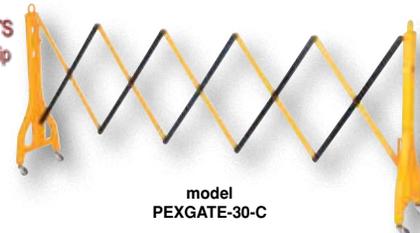

model PEXGATE-30-C



ASSEMBLED HRAIL


Galvanized Construction Barrier Systems

Designed for use as a temporary construction safety barrier. Welded steel construction with a galvanized finish. Barrier panel sections are made from 1¼" diameter steel tubing and includes one (1) vertical and one (1) horizontal brace. Ten (10) gauge chain link fence is secured to barrier with steel ties. Chain link fence openings are 2³/₈" x 2³/₈". Base unit includes two (2) receiver posts allowing for the connection of two (2) panels. Connectors are used for securing two (2) panel sections together.


MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
HRAIL-9072 [Ⓢ]	STARTER UNIT 1 panel and 2 base units	119
HRAIL-A-9072 [Ⓢ]	ADD-ON-UNIT (1) panel, (1) base & (1) pair connectors	115
HRAIL-PNL [Ⓢ]	BARRIER PANEL UNIT 90"L x 72"H	111
HRAIL-BASE [Ⓢ]	BARRIER BASE UNIT 24"W x 24"L x 7"H	7
HRAIL-CON [Ⓢ]	CONNECTORS one pair with hardware	3



model HRAIL-9072



model HRAIL-A-9072



model HRAIL-PNL



model HRAIL-BASE



model HRAIL-CON



Galvanized Folding Gates

Secure outside access during the day and add security at night with heavy-duty fourteen (14) gauge steel folding gates. Durable 2" steel wheels allow operator to quickly and fully retract gate when not in use. Center drop pin rests in pre-drilled hole to secure gate when extended. Easy installation! Lock is located on right side on single gates, looking from the outside of the building (lock can be changed to left side, but order needs to be noted of this change). Galvanized for durability. Constructed of steel U-Channels riveted back to back using aircraft quality rivets and heavy-duty 1½" x 1½" vertical angles. Contact factory for additional sizes.



series VSSG



CENTER DROP PIN



series VPFG



CENTER DROP PIN

CA Residents see WARNING A, Pg. 459

SINGLE FOLDING GATES					
MODEL NUMBER	COLLAPSED WIDTH (INCHES)	USABLE WIDTH (FEET)	COLLAPSED HEIGHT (FEET)	IN USE HEIGHT (FEET)	WEIGHT (POUND)
VSSG-465	11		6½	6	69
VSSG-470	11		7	6½	73
VSSG-475	11	3 to 4	7½	7	77
VSSG-480	11		8	7½	88
VSSG-485	11		8½	8	89
VSSG-565	11		6½	6	90
VSSG-570	11		7	6½	91
VSSG-575	11	4 to 5	7½	7	92
VSSG-580	11		8	7½	93
VSSG-585	11		8½	8	94
VSSG-665	11		6½	6	94
VSSG-670	11		7	6½	95
VSSG-675	11	5 to 6	7½	7	96
VSSG-680	11		8	7½	97
VSSG-685	11		8½	8	98
VSSG-765	11		6½	6	100
VSSG-770	11		7	6½	102
VSSG-775	11	6 to 7	7½	7	106
VSSG-780	15		8	7½	107
VSSG-785	15		8½	8	107
VSSG-865	14		6½	6	108
VSSG-870	14		7	6½	110
VSSG-875	14	7 to 8	7½	7	114
VSSG-880	15		8	7½	116
VSSG-885	15		8½	8	118
VSSG-970	15		7	6½	120
VSSG-975	15	8 to 9	7½	7	123
VSSG-980	15		8	7½	135
VSSG-1070	15	9 to 10	7	6½	137
VSSG-1080	15		8	7½	139

DOUBLE FOLDING GATES					
MODEL NUMBER	COLLAPSED WIDTH PER GATE (INCHES)	OVERALL USABLE WIDTH (FEET)	COLLAPSED HEIGHT (FEET)	IN USE HEIGHT (FEET)	WEIGHT (POUND)
VPFG-865	11		6½	6	120
VPFG-870	11		7	6½	121
VPFG-875	11	6 to 8	7½	7	123
VPFG-880	11		8	7½	123
VPFG-885	11		8½	8	124
VPFG-1065	11		6½	6	125
VPFG-1070	11		7	6½	130
VPFG-1075	11	8 to 10	7½	7	134
VPFG-1080	11		8	7½	137
VPFG-1085	11		8½	8	138
VPFG-1265	11		6½	6	139
VPFG-1270	11		7	6½	140
VPFG-1275	11	10 to 12	7½	7	153
VPFG-1280	11		8	7½	175
VPFG-1285	11		8½	8	180
VPFG-1465	11		6½	6	182
VPFG-1470	11		7	6½	187
VPFG-1475	11	12 to 14	7½	7	190
VPFG-1480	15		8	7½	195
VPFG-1485	15		8½	8	200
VPFG-1665	14		6½	6	202
VPFG-1670	14		7	6½	204
VPFG-1675	14	14 to 16	7½	7	210
VPFG-1680	15		8	7½	215
VPFG-1685	15		8½	8	218
VPFG-1870	15		7	6½	220
VPFG-1875	15	16 to 18	7½	7	224
VPFG-1880	15		8	7½	230
VPFG-2070	15	18 to 20	7	6½	232
VPFG-2080	15		8	7½	235

SINGLE AND DOUBLE FOLDING GATE OPTIONS		
MODEL NUMBER	DESCRIPTION	WEIGHT (POUND)
EX-BRACKET-9	6" / 9" L-BRACKET	2



model EX-BRACKET-9

CA Residents see WARNING A, Pg. 459



model VD-73

CA Residents see WARNING A, Pg. 459

Galvanized Door Scissor Gates

Prevent access to rooms with standard pedestrian Door Scissor Gates. Ideal for department store door openings, offices, warehouse inventory rooms, etc. Steel construction. Installation hardware not included.

MODEL NUMBER	COLLAPSED WIDTH	USABLE WIDTH	COLLAPSED HEIGHT	IN USE HEIGHT	WEIGHT (POUND)
VD-63	7"	48"	63"	57"	42
VD-68	7"	48"	66"	60"	54
VD-73	7"	48"	73"	67"	56
VD-79	7"	48"	79"	73"	60
VD-81	7"	48"	81"	75"	61
VD-83	7"	48"	83"	77"	62



CA Residents see WARNING A, Pg. 459


Galvanized Portable Gate 48 Hours to Ship

Gates are perfect for many locations: hospitals, schools, and warehouses. Used for blocking equipment, personnel, and entrances. Portable gates expand and lock to close off any opening, which allows for mobile safety and security. When not in use simply fold up, roll away, and store. Purchase optional add-on sections to expand to any distance. Brackets included.

MODEL NUMBER	COLLAPSED WIDTH	USABLE WIDTH	COLLAPSED HEIGHT	IN USE HEIGHT	CASTER STYLE	WEIGHT (POUND)
VXL-1265	78"	144"	79½"	76"	3" RUBBER	190
VXL-665	ADD-ON SECTION 6 FEET LONG WHEN EXPANDED					117

Adjustable Perimeter Guard Systems

Designed for use as a perimeter barrier around equipment and machinery. Several different sizes to choose from to custom-fit each application. Panels may be installed at any angle from 0° - 180°. Hinged door includes a keyed lock. Industrial powder coat finish for durability. Components are sold separately and must be assembled/installed on-site. Assembly hardware included. Complies with OSHA, EPA, and ANSI specifications.

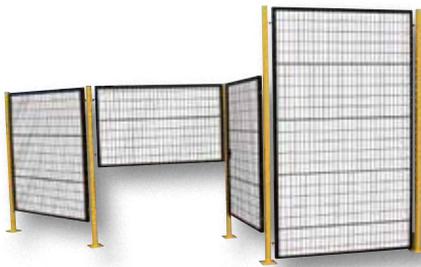

series APG

48 Hours to Ship

MODEL NUMBER	DESCRIPTION	HEIGHT (FEET)	WIDTH (FEET)	WEIGHT (POUND)
APG-M-35	PANEL	3	5	90
APG-M-38	PANEL	3	8	112
APG-M-45	PANEL	4	5	118
APG-M-48	PANEL	4	8	125
APG-M-55	PANEL	5	5	127
APG-M-58	PANEL	5	8	128
APG-M-65	PANEL	6	5	135
APG-M-85	PANEL	8	5	140
APG-P6-L	IN-LINE POST	6	N/A	59
APG-P6-C	CORNER POST	6	N/A	59
APG-P8-L	IN-LINE POST	8	N/A	59
APG-P8-C	CORNER POST	8	N/A	59
APG-DR-54	HINGED DOOR	5	4	118



model HDSW-67

Heavy Duty Swinging Traffic Doors

These multi-purpose lightweight doors are tough enough to take the abuse of personnel, stock carts, and motorized pallet jacks. The door panels are constructed with 1/8" thick rotationally molded cross-linked polyethylene outer shell and foamed-in-place Non-CFC urethane foam core. The panels are corrosion resistant, making it ideal for wash down applications as it has no gaps or joint seams. The door comes standard with 24" black bumpers on both sides of the door. Includes a 1/8" thick polycarbonate window. Light duty version available, contact factory.

SPECIFY COLOR WHEN ORDERING • series HDSW

FOREST GREEN	MEDIUM BROWN
JADE	ROYAL BLUE
CADET BLUE	NAVY
WHITE	BLACK
METALLIC GRAY	BEIGE
CLOUD GRAY	BURGUNDY
RED	CHOCOLATE BROWN

MODEL NUMBER	DESCRIPTION	SIZE (W x L)	WEIGHT (POUND)
HDSW-37	SINGLE DOOR PANEL	36" x 84"	146
HDSW-57	DOUBLE DOOR PANEL	60" x 84"	256
HDSW-58	DOUBLE DOOR PANEL	60" x 96"	280
HDSW-67	DOUBLE DOOR PANEL	72" x 84"	290
HDSW-68	DOUBLE DOOR PANEL	72" x 96"	320
HDSW-88	DOUBLE DOOR PANEL	96" x 96"	400

SPECIFY COLOR WHEN ORDERING