




INDUSTRIAL STORAGE SOLUTIONS



PALLET RACKING



CANTILEVER RACKING



STORAGE RACKS



STORAGE CABINETS



STORAGE CASES



PORTABLE TOOL BOXES

| | |
|--------------------------------|--------------|
| Pallet Racking ❶ | 376-377 |
| Pallet Rack Guards ❷❸❹ | 378, 379-380 |
| Cantilever Racking ❷❹ | 381-385 |
| Roll-Out Shelving ❶ | 386 |
| Storage Racks ❷ | 387 |
| Bar Racks ❷❹ | 387 |
| Sheet Racks ❷ | 388 |
| Stackable Racks ❷❹ | 389-390 |
| Wire Reel Caddies ❷❹ | 391 |
| Storage & Security Cabinets ❸❹ | 392-394 |
| Steel & Plastic Shelving ❸❹ | 395-396 |
| Storage Cases & Containers ❸❹ | 397-398 |
| Portable Tool Boxes ❷ | 399 |
| Storage Sheds & Shelters ❷❹ | 400 |
| Bicycle Racks ❷❹ | 401 |



series PRTD




series BEAM-S
BOLT-ON DESIGN



model PSB-42



model SSB-42

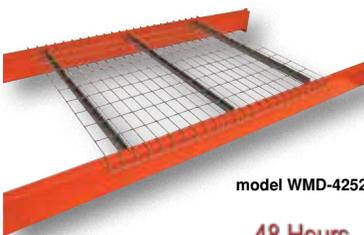

model WMD-4252



model SWMD-4252



Pallet Racking

- Scratch and rust resistance
- Structural uniformity and integrity

Pallet racking solves the storage and retrieval needs faced by most industries today. Adaptability to specific layout installations is just one added feature. Baked-in powder-coated toughness. Units are sold each.

| FRAME | | | | |
|--|--------------|-------------|-------------------------|----------------|
| MODEL NUMBER | FRAME HEIGHT | FRAME DEPTH | UNIFORM CAPACITY / EACH | WEIGHT (POUND) |
| PRTD-10-42-19 [Ⓢ] | 120" | 42" | 19,380 lb. | 139 |
| PRTD-10-42-24 [Ⓢ] | 120" | 42" | 24,000 lb. | 171 |
| PRTD-12-42-19 [Ⓢ] | 144" | 42" | 19,380 lb. | 162 |
| PRTD-12-42-24 [Ⓢ] | 144" | 42" | 24,000 lb. | 165 |
| PRTD-14-42-19 [Ⓢ] | 168" | 42" | 19,380 lb. | 173 |
| PRTD-14-42-24 [Ⓢ] | 168" | 42" | 24,000 lb. | 187 |
| PRTD-16-42-19 [Ⓢ] | 192" | 42" | 19,380 lb. | 183 |
| PRTD-16-42-24 [Ⓢ] | 192" | 42" | 24,000 lb. | 226 |
| PRTD-18-42-24 [Ⓢ] | 216" | 42" | 24,000 lb. | 180 |
| STEP BEAM | | | | |
| MODEL NUMBER | BEAM HEIGHT | BEAM LENGTH | UNIFORM CAPACITY / PAIR | WEIGHT (POUND) |
| BEAM-S-850 [Ⓢ] | 6" | 96" | 5,000 lb. | 66 |
| BEAM-S-870 [Ⓢ] | 6" | 96" | 7,000 lb. | 70 |
| BEAM-S-960 [Ⓢ] | 6" | 108" | 6,000 lb. | 78 |
| BEAM-S-970 [Ⓢ] | 6" | 108" | 7,000 lb. | 82 |
| BEAM-S-1050 [Ⓢ] | 6" | 120" | 5,000 lb. | 75 |
| BEAM-S-1070 [Ⓢ] | 6" | 120" | 7,000 lb. | 82 |
| BEAM-S-1250 [Ⓢ] | 6" | 144" | 5,000 lb. | 105 |
| BEAM-S-1260 [Ⓢ] | 6" | 144" | 6,000 lb. | 115 |
| FRAME SPACER - SEPARATES BACK TO BACK FRAMES (HARDWARE INCLUDED) | | | | |
| MODEL NUMBER | FRAME SPACER | | | WEIGHT (POUND) |
| FSR-6 [Ⓢ] | 6" | | | 2 |
| FSR-12 [Ⓢ] | 12" | | | 2 |

Pallet Support Bars

Cross bars provide economical support for pallets between rack step beams. The model SSB-42 is 1½" high. It is designed to sit flush with the top of the rack step beam. The model PSB-42 is 1" high and is designed to be used with ½" plywood or particle board so the board will be flush with the top of the beam. The boxed steel bars fit our standard 42" rack. 14 gauge material. Uniform capacity is 1,000 pounds.

| MODEL NUMBER | WIDTH | LENGTH | HEIGHT | WEIGHT (POUND) |
|---------------------|-------|--------|--------|----------------|
| PSB-42 [Ⓢ] | 3" | 38½" | 1" | 6 |
| SSB-42 [Ⓢ] | 3" | 38½" | 1½" | 9 |

Pallet Rack Wire Decking

Provide maximum support at minimum cost. The three 13 gauge "U" channels keep pallet and products from falling through rack beams. Fits 1½" step beam. Welded wire construction with under-supports. Requires two sections for use in bay. Uniform load capacity is 2,500 pounds.

| MODEL NUMBER | DECKING DEPTH | DECKING LENGTH | (2) PIECES REQUIRED FOR BEAM WIDTH | WEIGHT (POUND) |
|-----------------------|---------------|----------------|------------------------------------|----------------|
| WMD-4246 [Ⓢ] | 42" | 46" | 96" | 64 |
| WMD-4252 [Ⓢ] | 42" | 52" | 108" | 74 |
| WMD-4258 [Ⓢ] | 42" | 58" | 120" | 82 |

Crown Pallet Rack Decking

Add convenience, visibility, and efficiency to your rack. By sloping the decking, you help the user do their job. 6 gauge wire mesh. Uniform load capacity is 650 pounds. Slope is 4½" over 21". Designed for our 42" deep x 1½" step type pallet rack beam.

| MODEL NUMBER | DECKING DEPTH | DECKING LENGTH | (2) PIECES REQUIRED FOR BEAM WIDTH | WEIGHT (POUND) |
|------------------------|-----------------------------------|----------------|------------------------------------|----------------|
| SWMD-4246 [Ⓢ] | 42" | 46" | 96" | 67 |
| SWMD-4252 [Ⓢ] | 42" | 52" | 108" | 74 |
| SWMD-4258 [Ⓢ] | 47 ⁹ / ₁₆ " | 58" | 120" | 82 |

Open Area Rack Decking

Ideal for storing furniture, carpet, record files, or products that require a uniform support. Fire protection friendly with 50% open design. Designed for pallet rack beam with 42" deep racking. 22 gauge steel rack. Fits 1½" beam offset. The top hats are 3½" wide with top slotted holes 1¼" x 2½" and the valleys are 2½" wide with slotted holes 1" x 3". Custom sizes available, contact factory.

| MODEL NUMBER | BEAM LENGTH | FRAME DEPTH | SPAN | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|-------------|-------------|------|------------------|----------------|
| PCH-96Ⓢ | 96" | 42" | 38½" | 3,780 lb. | 62 |
| PCH-108Ⓢ | 108" | 42" | 38½" | 3,780 lb. | 72 |
| PCH-120Ⓢ | 120" | 42" | 38½" | 3,780 lb. | 82 |



Gravity Flow Inserts

Convert your pallet rack into flow rack simply by inserting our Gravity Flow Inserts between pallet rack beams. Inserts measure 36⅝" long for use in 42" deep pallet rack frames. Aluminum roller diameter is ¾" on 2" centers. Side frames are constructed of steel with aluminum end hangers. Uniform capacity is 50 pounds per foot.


| MODEL NUMBER | WIDTH | LENGTH | UNIFORM CAPACITY PER FOOT | WEIGHT (POUND) |
|--------------|-------|--------|---------------------------|----------------|
| RFLOW-9-42 | 9" | 36⅝" | 50 lb. | 13 |
| RFLOW-12-42 | 12" | 36⅝" | 50 lb. | 15 |



Pallet Rack Gravity Flow Shelves

Pallet Rack Gravity Flow Shelves allow users to easily convert pallet racking into gravity flow racking. Each model includes all components for one shelf level: frame, roller tracks, and box dividers. Roller track and box divider spacing is adjustable. Uniform capacity is 25 pounds per square foot. Steel construction with painted finish. Ships knocked down and includes mounting hardware for attachment to frames.

| MODEL NUMBER | OVERALL SIZE (W x D) | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|----------------------|--------------------|----------------|
| GFL-9648Ⓢ | 96" x 48" | 25 lb. per sq. ft. | 181 |
| GFL-9696Ⓢ | 96" x 96" | 25 lb. per sq. ft. | 252 |

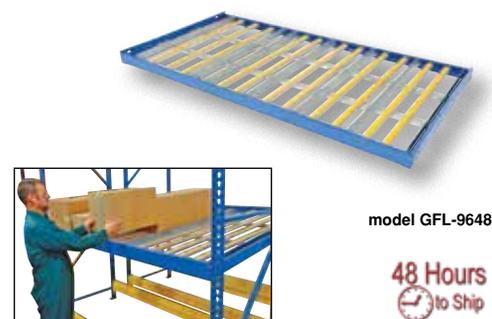


Back Guards for Pallet Rack

Contain and minimize the potential hazard of falling items with Pallet Rack Back Guards. Modular sized panels mount directly to pallet rack system, which installs quickly and provides safety. System is made of 2" x 2" x 10 gauge steel welded wire mesh, welded into a 1¼" x 1¼" x 13 gauge steel angle frame. Panels have mounting holes on 6" centers. Options of flush mount or offset brackets allow for material or pallets that overhang the beams. See RBG survey sheet on page 402 (K28).

| MODEL NUMBER | LENGTH | HEIGHT | DESCRIPTION | WEIGHT (POUND) |
|--------------|--|--------|-------------------------|----------------|
| RBG-84 | 96" | 48" | RACK BACK GUARD | 146 |
| RBG-85 | 96" | 60" | RACK BACK GUARD | 146 |
| RBG-94 | 108" | 48" | RACK BACK GUARD | 210 |
| RBG-95 | 108" | 60" | RACK BACK GUARD | 210 |
| RBG-104 | 120" | 48" | RACK BACK GUARD | 210 |
| RBG-105 | 120" | 60" | RACK BACK GUARD | 210 |
| RBG-124 | 144" | 48" | RACK BACK GUARD | 274 |
| RBG-125 | 144" | 60" | RACK BACK GUARD | 274 |
| RBG-1FMC | 4 PACK FLUSH MOUNT CLIPS (TEARDROP STYLE) | | | 1 |
| RBG-43-OC | 1" - 3" , 4 PACK OFFSET CLIPS (TEARDROP STYLE) | | | 1 |
| RBG-46-OC | 4" - 6" , 4 PACK OFFSET CLIPS (TEARDROP STYLE) | | | 1 |
| RDHG-88 | 96" | 96" | DOUBLE HINGED RACK GATE | 116 |
| RDHG-810 | 96" | 120" | DOUBLE HINGED RACK GATE | 138 |





model PRSN-96-4

Includes (4) multi position spacer brackets with bolts



Pallet Rack Back Guards

Minimize the potential hazard of products falling out of the back of pallet rack. Attach this steel protective shield with the included steel brackets. Spacer brackets allow guard to be positioned 4 or 6 inches away from rack. Wire mesh is attached to 1¼" x 1¼" x ⅛" angle frame.

| MODEL NUMBER | PANEL LENGTH | HEIGHT | WEIGHT (POUND) |
|--------------|--------------|--------|----------------|
| PRSN-96-4 | 96" | 48½" | 51 |
| PRSN-108-4 | 108" | 48½" | 55 |
| PRSN-120-4 | 120" | 48½" | 60 |



model PRN-111-8

48 Hours to Ship

Nylon Pallet Rack Netting

Minimize the potential of racked products falling off the back of pallet racks. The nylon mesh rope is ⅜" thick with 4" x 4" holes and is edged with polypropylene rope. Black nylon zip ties are included for attaching netting to pallet racking. This netting is designed for flush mounting on pallet racking. 96" high models consist of two 48" high units and zip ties to connect them together. The holding capacity is rated at 2,500 lb.

| MODEL NUMBER | LENGTH | HEIGHT | WEIGHT (POUND) |
|--------------|--------|--------|----------------|
| PRN-99-4 | 99" | 48" | 7 |
| PRN-99-8 | 99" | 96" | 12 |
| PRN-111-4 | 111" | 48" | 8 |
| PRN-111-8 | 111" | 96" | 13 |
| PRN-123-4 | 123" | 48" | 9 |
| PRN-123-8 | 123" | 96" | 14 |



model PRRJ-10-D




model PRRJ-DOL

Pallet Rack Lifting Dolly

Designed for moving empty fully-assembled pallet racking. Lifting dolly jack includes hydraulic pump to raise pallet rack frame. Frame must have low cross-bar for proper usage. Safety strap is used to secure lifting dolly to pallet rack frames. Steel construction with painted finish. Optional dollies are used to hold frame feet.

| MODEL NUMBER | DESCRIPTION | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|--------------------|------------------|----------------|
| PRRJ-10-D | LIFTING DOLLY JACK | 750 lb. | 120 |
| PRRJ-DOL | PAIR OF DOLLIES | 500 lb. each | 55 |



model PRS-51-D

Pallet Rack Sump

Polyethylene Pallet Rack Sump keeps dangerous and costly spills off floors, equipment, and inventory. Allows direct forklift access to wooden pallet - sump unit stays positioned in the rack when removing pallet and drums. Low profile design fits into warehouse racking with minimal obstruction to adjacent storage areas. Unit holds up to four (4) 55-gallon drums on a standard shipping pallet. Inside dimensions for a pallet are 49" x 49". Model PRS-51-D comes with drain/ball valve assembly for draining liquids.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x L x H) | UNIFORM CONTAINMENT CAPACITY | WEIGHT (POUND) |
|--------------|-------------|--------------------------|------------------------------|----------------|
| PRS-51-D | WITH DRAIN | 51½" x 51½" x 12" | 66 GAL. | 50 |
| PRS-51-ND | NO DRAIN | 51½" x 51½" x 12" | 66 GAL. | 50 |



model PRTD-TB-BK



Pallet Rack Trash Bags 48 Hours to Ship

Control warehouse waste without using valuable floor space! Manufactured from rugged, waterproof polyester material, the unit has three handles to help with emptying. "S" hooks are included for hanging the bag on pallet rack end frames. Other colors and printed messages available, contact factory.

| MODEL NUMBER | BAG SIZE AT TOP (W x H) | BAG SIZE AT BOTTOM (W x H) | BAG COLOR | WEIGHT (POUND) |
|---------------------|-------------------------|----------------------------|-----------|----------------|
| PRTD-TB-BK | 37" x 40" | 25" x 40" | BLACK | 2 |
| PRTD-TB-BK-5PK | 37" x 40" | 25" x 40" | BLACK | 9 |
| PRTD-TB-BU-CWL-5PK* | 37" x 40" | 25" x 40" | BLUE | 9 |

*BLUE BAGS WITH WHITE LETTERING "PLASTIC ONLY"

Structural Rack Guards

Economical way to protect against damage to pallet racking and wall corners. Constructed of 6" or 8" steel "C" channel for durability. Available with or without a rubber bumper. Easy to install to concrete surface. Four mounting holes for maximum stability. Safety yellow, baked-in powder-coated toughness.

Models G6 require 1/2" anchor bolts. Models G8 require 3/4" anchor bolts. Installation hardware sold separately.

| MODEL NUMBER | OVERALL HEIGHT | USABLE OPENING (W x D) | OVERALL BASE (W x D) | WEIGHT (POUND) |
|---|--|--|---------------------------------------|----------------|
| STRUCTURAL RACK GUARDS | | | | |
| G6-12 | 12¼" | 4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 8 ¹ / ₆ " x 6" | 12 |
| G6-18 | 18¼" | 4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 8 ¹ / ₆ " x 6" | 16 |
| G6-24 | 24¼" | 4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 8 ¹ / ₆ " x 6" | 22 |
| G6-36 | 36¼" | 4 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 8 ¹ / ₆ " x 6" | 31 |
| G8-12 | 12¼" | 6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 13 |
| G8-18 | 18¼" | 6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 21 |
| G8-24 | 24¼" | 6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 28 |
| G8-36 | 36¼" | 6 ⁹ / ₁₆ " x 3 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 37 |
| STRUCTURAL RACK GUARDS WITH RUBBER BUMPERS | | | | |
| G6-12-B | 12¼" | 4 ⁹ / ₁₆ " x 2 ⁷ / ₈ " | 8 ¹ / ₆ " x 6" | 19 |
| G6-18-B | 18¼" | 4 ⁹ / ₁₆ " x 2 ⁷ / ₈ " | 8 ¹ / ₆ " x 6" | 25 |
| G6-24-B | 24¼" | 4 ⁹ / ₁₆ " x 2 ⁷ / ₈ " | 8 ¹ / ₆ " x 6" | 42 |
| G6-36-B | 36¼" | 4 ⁹ / ₁₆ " x 2 ⁷ / ₈ " | 8 ¹ / ₆ " x 6" | 44 |
| G8-12-B | 12½" | 6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 23 |
| G8-18-B | 18½" | 6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 38 |
| G8-24-B | 24½" | 6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 51 |
| G8-36-B | 36½" | 6 ⁹ / ₁₆ " x 2 ¹¹ / ₁₆ " | 10 ¹ / ₆ " x 6" | 53 |
| AS-125 | ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5" (G6 UNITS) | | | 1 |
| AS-125-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5" (G6 UNITS) | | | 4 |
| AS-344 | ANCHOR BOLTS FOR CONCRETE (1) 3/4" x 4" (G8 UNITS) | | | 1 |
| AS-344-4PK | ANCHOR BOLTS FOR CONCRETE (4) 3/4" x 4" (G8 UNITS) | | | 4 |

Low Profile Rack Guards

Protect pallet racking and wall corners against damage from fork trucks, pallet trucks, and carts with Low Profile Rack Guards. All components are laser cut. Quick and easy two (2) hole installation. Installs in half the time of other guards. Safety yellow, baked-in powder-coated toughness. Steel construction. Installation hardware sold separately.

| MODEL NUMBER | OVERALL HEIGHT | USABLE OPENING (W x D) | OVERALL BASE (W x D) | WEIGHT (POUND) |
|--------------|---|------------------------|----------------------|----------------|
| NPG4-12 | 11 ⁷ / ₈ " | 4¼" x 1" | 8" x 3" | 5 |
| NPG4-18 | 17 ⁷ / ₈ " | 4¼" x 1" | 8" x 3" | 7 |
| NPG4-24 | 23 ⁷ / ₈ " | 4¼" x 1" | 8" x 3" | 9 |
| NPG4-36 | 35 ⁷ / ₈ " | 4¼" x 1" | 8" x 3" | 15 |
| NPG6-12 | 11 ⁷ / ₈ " | 6¼" x 1" | 10" x 3" | 7 |
| NPG6-18 | 17 ⁷ / ₈ " | 6¼" x 1" | 10" x 3" | 8 |
| NPG6-24 | 23 ⁷ / ₈ " | 6¼" x 1" | 10" x 3" | 11 |
| NPG6-36 | 35 ⁷ / ₈ " | 6¼" x 1" | 10" x 3" | 16 |
| AS-125 | ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5" | | | 1 |
| AS-125-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5" | | | 4 |

Rack Guards with Rubber Bumper Insert

Protect pallet racking with durable wrap around protection. Increase pallet rack column strength on impact by over 100%. Includes a ½" thick rubber bumper and hardware. Easy to install with wrench or socket. No concrete drilling required. Steel construction. Baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL SIZE (W x D) | USABLE OPENING (W x D) W/BUMPER | OVERALL HEIGHT | WEIGHT (POUND) |
|--------------|---|---|----------------|----------------|
| RUD-24 | 3 ³ / ₈ " x 4 ⁷ / ₈ " | 3 ¹ / ₈ " x 4 ³ / ₄ " | 24" | 13 |
| RUD-36 | 3 ³ / ₈ " x 4 ⁷ / ₈ " | 3 ¹ / ₈ " x 4 ³ / ₄ " | 36" | 18 |
| RUD-48 | 3 ³ / ₈ " x 4 ⁷ / ₈ " | 3 ¹ / ₈ " x 4 ³ / ₄ " | 48" | 23 |



STRUCTURAL RACK GUARDS



STRUCTURAL RACK GUARDS WITH RUBBER BUMPERS



model NPG4-12

model NPG6-36



model RUD-24



model VPRP-YL-12

48 Hours
to Ship



Rack Shields

Easy one-step installation, these Rack Shields eliminate painting and prevent damage to your vertical supports. Made of extruded high-density polyethylene thermoplastic.

| MODEL NUMBER | OVERALL HEIGHT | USABLE SIZE (W x D) | COLOR | WEIGHT (POUND) |
|--------------|----------------|---------------------|--------|----------------|
| VPRP-YL-09 | 9" | 3" x 2" | YELLOW | 2 |
| VPRP-YL-12 | 12" | 3" x 2" | YELLOW | 2 |
| VPRP-YL-18 | 18" | 3" x 2" | YELLOW | 4 |
| VPRP-GY-09 | 9" | 3" x 2" | GRAY | 2 |
| VPRP-GY-12 | 12" | 3" x 2" | GRAY | 2 |
| VPRP-GY-18 | 18" | 3" x 2" | GRAY | 4 |
| VPRP-BK-09 | 9" | 3" x 2" | BLACK | 2 |
| VPRP-BK-12 | 12" | 3" x 2" | BLACK | 2 |
| VPRP-BK-18 | 18" | 3" x 2" | BLACK | 4 |

High Impact Plastic Upright Rack Guard

Impact resistant blended polyethylene outer shell. Internal shock absorbing pad for added protection. Double stack for extra height protection. Does not require bolting to the floor. Quickly attaches to pallet rack frame with (2) two zip ties, included. High visibility fluorescent yellow color.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | FITS FRAME WIDTH | WEIGHT (POUND) |
|--------------|---|--|----------------|
| PRUD-20-2833 | 3 ⁵ / ₈ " x 3" x 19 ¹ / ₂ " | 2 ⁵ / ₈ " to 3 ¹ / ₄ " | 3 |



Polyethylene Rack Protector

Protect warehouse racking from damage from forklifts, pallet jacks, and other equipment. Heavy-duty magnet holds unit securely in place. No hardware required for installation. Polyethylene construction is maintenance free, no painting or upkeep required. Safety yellow color with contrasting black warning stripes provides excellent visual reference for drivers and other warehouse personnel.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | USABLE OPENING SIZE | WEIGHT (POUND) |
|--------------|--|---------------------|----------------|
| VMRP-15 | 5 ³ / ₈ " x 3 ¹ / ₄ " x 15 ¹ / ₂ " | 4" | 7 |



48 Hours
to Ship

Foam Edge Guards

Foam Edge Guards provide added protection when necessary. Manufactured from flexible foam. Black foam color with yellow alert striping. Easy to cut to custom lengths.

| MODEL NUMBER | OVERALL SIZE (W x L x H) | SLOT SIZE | ADHESIVE TAPE | WEIGHT (POUND) |
|--------------|--|--|---------------|----------------|
| FEG-A | 1 ¹ / ₂ " dia x 36" | 5 ¹ / ₁₆ " x 3 ³ / ₄ " | YES | 1 |
| FEG-B | 2 ³ / ₈ " x 36" x 1 ³ / ₁₆ " | 1" x 1" | YES | 1 |
| FEG-C | 1 ¹ / ₂ " x 36" x 1 ¹ / ₂ " | 5 ¹ / ₁₆ " x 3 ³ / ₄ " | YES | 1 |
| FEG-D | 1 ¹ / ₂ " x 36" x 1 ¹ / ₂ " | 1" x 1" | YES | 1 |



model RPE-1-5



model RPI-1-5

Racking Place Card Labels

Keep your pallet and flow racks organized, easy-to-identify, and cleaned up without the time and cost involved with painting. Product is designed for easy removal and replacement of labels or barcodes on pallet racks, flow racks, and shelving. The Rack Place Card Labels adhere permanently to metal surfaces in a wide range of temperatures and accepts most standard label adhesives. The Industrial labels have a better service and application temperature, as well as better adhesive formulation than the economy labels.

| INDUSTRIAL LABELS | | | |
|-------------------|-----------|-----------------------|----------------|
| MODEL NUMBER | ROLL SIZE | NO. ROLLS PER PACKAGE | WEIGHT (POUND) |
| RPI-1-5 | 1" x 100' | 5 | 3 |
| RPI-1-25 | 1" x 100' | 25 | 11 |
| RPI-1-50 | 1" x 100' | 50 | 22 |
| RPI-1-100 | 1" x 100' | 100 | 44 |
| RPI-2-5 | 2" x 100' | 5 | 4 |
| RPI-2-25 | 2" x 100' | 25 | 19 |
| RPI-2-50 | 2" x 100' | 50 | 38 |
| RPI-2-100 | 2" x 100' | 100 | 38 |

| ECONOMY LABELS | | | |
|----------------|-----------|-----------------------|----------------|
| MODEL NUMBER | ROLL SIZE | NO. ROLLS PER PACKAGE | WEIGHT (POUND) |
| RPE-1-5 | 1" x 100' | 5 | 3 |
| RPE-1-25 | 1" x 100' | 25 | 11 |
| RPE-1-50 | 1" x 100' | 50 | 22 |
| RPE-1-100 | 1" x 100' | 100 | 44 |
| RPE-2-5 | 2" x 100' | 5 | 4 |
| RPE-2-25 | 2" x 100' | 25 | 19 |
| RPE-2-50 | 2" x 100' | 50 | 38 |
| RPE-2-100 | 2" x 100' | 100 | 38 |

Structural Cantilever Racking


Cantilever Rack Systems offer flexibility to custom-fit individual applications. The unique bolt together construction with welded steel components offers a great combination of strength and durability. Individual components are sold separately to accommodate your requirements. Arms attach to upright with "C" clamps that are infinitely adjustable. *Capacity listed is per upright.



| SINGLE-SIDED CANTILEVER UPRIGHTS | | | | |
|----------------------------------|---------------|-------------------|-------------------|----------------|
| MODEL NUMBER | COLUMN HEIGHT | ARM LENGTH TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| SAC-812 | 96" | 12" | 9,000 lb. | 220 |
| SAC-824 | 96" | 24" | 6,000 lb. | 229 |
| SAC-836 | 96" | 36" | 4,600 lb. | 243 |
| SAC-848 | 96" | 48" | 3,800 lb. | 267 |
| SAC-1012 | 120" | 12" | 13,250 lb. | 285 |
| SAC-1024 | 120" | 24" | 8,300 lb. | 294 |
| SAC-1036 | 120" | 36" | 6,125 lb. | 317 |
| SAC-1048 | 120" | 48" | 4,750 lb. | 329 |
| SAC-1212 | 144" | 12" | 13,300 lb. | 325 |
| SAC-1224 | 144" | 24" | 8,250 lb. | 335 |
| SAC-1236 | 144" | 36" | 6,125 lb. | 358 |
| SAC-1248 | 144" | 48" | 4,750 lb. | 369 |


| DOUBLE-SIDED CANTILEVER UPRIGHTS | | | | |
|----------------------------------|---------------|-------------------|-------------------|----------------|
| MODEL NUMBER | COLUMN HEIGHT | ARM LENGTH TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| DAC-812 | 96" | 12" | 18,000 lb. | 242 |
| DAC-824 | 96" | 24" | 12,000 lb. | 271 |
| DAC-836 | 96" | 36" | 9,200 lb. | 290 |
| DAC-1012 | 120" | 12" | 26,500 lb. | 316 |
| DAC-1024 | 120" | 24" | 16,600 lb. | 350 |
| DAC-1036 | 120" | 36" | 12,250 lb. | 365 |
| DAC-1212 | 144" | 12" | 26,600 lb. | 357 |
| DAC-1224 | 144" | 24" | 16,500 lb. | 386 |
| DAC-1236 | 144" | 36" | 12,250 lb. | 405 |

SINGLE-SIDED CANTILEVER UPRIGHTS series SAC




| MODEL NUMBER | USABLE ARM LENGTH | UNIFORM CAPACITY PER ARM | WEIGHT (POUND) |
|----------------------------------|-----------------------------------|--------------------------|----------------|
| STRAIGHT ARMS WITH LIP | | | |
| SSAL-12 | 11 ⁵ / ₁₆ " | 3,000 lb. | 11 |
| SSAL-24 | 23 ⁵ / ₁₆ " | 2,000 lb. | 15 |
| SSAL-36 | 35 ⁵ / ₁₆ " | 1,200 lb. | 20 |
| SSAL-48 | 47 ⁵ / ₁₆ " | 1,000 lb. | 24 |
| STRAIGHT ARMS WITH NO LIP | | | |
| SSAL-12-NL | 11 ⁵ / ₁₆ " | 3,000 lb. | 11 |
| SSAL-24-NL | 23 ⁵ / ₁₆ " | 2,000 lb. | 15 |
| SSAL-36-NL | 35 ⁵ / ₁₆ " | 1,200 lb. | 20 |
| SSAL-48-NL | 47 ⁵ / ₁₆ " | 1,000 lb. | 24 |

STRAIGHT ARMS WITH 2" LIPS series SSAL



| HORIZONTAL BRACE SETS | | | | |
|-----------------------|---------------|----------------|----------------|---------------------|
| MODEL NUMBER | COLUMN HEIGHT | COLUMN SPACING | BRACES PER SET | WEIGHT (POUND/PAIR) |
| HBS-83 | 96" | 36" | 3 | 21 |
| HBS-84 | 96" | 48" | 3 | 30 |
| HBS-85 | 96" | 60" | 3 | 36 |
| HBS-86 | 96" | 72" | 3 | 41 |
| HBS-10123 | 120" & 144" | 36" | 5 | 84 |
| HBS-10124 | 120" & 144" | 48" | 5 | 92 |
| HBS-10125 | 120" & 144" | 60" | 5 | 102 |
| HBS-10126 | 120" & 144" | 72" | 5 | 111 |

HORIZONTAL BRACE SETS series HBS



USED TO CONNECT TWO UPRIGHTS TOGETHER



model
SU-C-6-24-SET
(shown assembled)



model
HDU-C-8-36-SET
(shown assembled)



model
HDU-C-8-24-G-SET
(shown assembled)

CA Residents see
WARNING A, Pg. 459

Cantilever Rack Kits

Cantilever Racks are ideal for eliminating storage problems. The steel constructed design allows for quick and efficient handling by forklift or by hand. The rack includes pre-drilled holes, adjustable arms for access to variable heights, and front lipped arms to prevent items from falling. Available in both single sided and double sided units with the option of standard, medium, or heavy duty construction. Baked-in powder-coated toughness. *Capacity is per level.

| MODEL NUMBER | PACKAGE CONTENTS | *UNIFORM CAPACITY | WEIGHT (POUND) |
|---|--|-------------------|----------------|
| STANDARD-DUTY CANTILEVER RACK KITS | | | |
| SU-C-6-24-SET | (2) SU-C-6-24 6' High Single-Sided Uprights, (1) SB-C-6-48 Brace Set, (4) SSA-C-24 24" Arms | 800 lb. | 382 |
| SU-C-8-24-SET | (2) SU-C-8-24 8' High Single-Sided Uprights, (1) SB-C-8-48 Brace Set, (4) SSA-C-24 24" Arms | 800 lb. | 422 |
| SDU-C-6-24-SET | (2) SDU-C-6-24 6' High Double-Sided Uprights, (1) SB-C-6-48 Brace Set, (8) SSA-C-24 24" Arms | 1,600 lb. | 516 |
| SDU-C-6-36-SET | (2) SDU-C-6-36 6' High Double-Sided Uprights, (1) SB-C-6-48 Brace Set, (8) SSA-C-36 36" Arms | 800 lb. | 556 |
| MEDIUM-DUTY CANTILEVER RACK KITS | | | |
| MU-C-6-24-SET | (2) MU-C-6-24 6' High Single-Sided Uprights, (1) MB-C-6-48 Brace Set, (4) MSA-C-24 24" Arms | 1,200 lb. | 482 |
| MU-C-8-24-SET | (2) MU-C-8-24 8' High Single-Sided Uprights, (1) MB-C-8-48 Brace Set, (4) MSA-C-24 24" Arms | 1,200 lb. | 522 |
| MDU-C-6-24-SET | (2) MDU-C-6-24 6' High Double-Sided Uprights, (1) MB-C-6-48 Brace Set, (8) MSA-C-24 24" Arms | 2,400 lb. | 618 |
| MDU-C-6-36-SET | (2) MDU-C-6-36 6' High Double-Sided Uprights, (1) MB-C-6-48 Brace Set, (8) MSA-C-36 36" Arms | 1,600 lb. | 810 |
| HEAVY-DUTY CANTILEVER RACK KITS | | | |
| HU-C-8-36-SET | (2) HU-C-8-36 8' High Single-Sided Uprights, (1) HB-C-8-6 Brace Set, (4) HSA-C-36 36" Arms | 2,400 lb. | 810 |
| HDU-C-8-24-SET | (2) HDU-C-8-24 8' High Double-Sided Uprights, (1) HB-C-8-6 Brace Set, (8) HSA-C-24 24" Arms | 8,000 lb. | 890 |
| HDU-C-8-36-SET | (2) HDU-C-8-36 8' High Double-Sided Uprights, (1) HB-C-8-6 Brace Set, (8) HSA-C-36 36" Arms | 4,800 lb. | 1016 |

Galvanized Cantilever Rack Kits


Galvanized Cantilever Rack systems are ideal for distributing and industrial settings. The galvanized steel design minimizes rust while providing a strong construction. The adjustable rack arms can be adapted to a customized position allowing the unit to fit the needs of individual circumstances.

*Capacity is per level.

| MODEL NUMBER | PACKAGE CONTENTS | *UNIFORM CAPACITY | WEIGHT (POUND) |
|--|--|-------------------|----------------|
| STANDARD-DUTY GALVANIZED CANTILEVER RACK KITS | | | |
| SU-C-6-24-G-SET | (2) SU-C-6-24-G 6' High Single-Sided Uprights, (1) SB-C-6-48-G Brace Set, (4) SSA-C-24-G 24" Arms | 800 lb. | 382 |
| SU-C-8-24-G-SET | (2) SU-C-8-24-G 8' High Single-Sided Uprights, (1) SB-C-8-48-G Brace Set, (4) SSA-C-24-G 24" Arms | 800 lb. | 422 |
| SDU-C-6-24-G-SET | (2) SDU-C-6-24-G 6' High Double-Sided Uprights, (1) SB-C-6-48-G Brace Set, (8) SSA-C-24-G 24" Arms | 1,600 lb. | 516 |
| SDU-C-6-36-G-SET | (2) SDU-C-6-36-G 6' High Double-Sided Uprights, (1) SB-C-6-48-G Brace Set, (8) SSA-C-36-G 36" Arms | 800 lb. | 556 |
| MEDIUM-DUTY GALVANIZED CANTILEVER RACK KITS | | | |
| MU-C-6-24-G-SET | (2) MU-C-6-24-G 6' High Single-Sided Uprights, (1) MB-C-6-48-G Brace Set, (4) MSA-C-24-G 24" Arms | 1,200 lb. | 482 |
| MU-C-8-24-G-SET | (2) MU-C-8-24-G 8' High Single-Sided Uprights, (1) MB-C-8-48-G Brace Set, (4) MSA-C-24-G 24" Arms | 1,200 lb. | 522 |
| MDU-C-6-24-G-SET | (2) MDU-C-6-24-G 6' High Double-Sided Uprights, (1) MB-C-6-48-G Brace Set, (8) MSA-C-24-G 24" Arms | 2,400 lb. | 618 |
| MDU-C-6-36-G-SET | (2) MDU-C-6-36-G 6' High Double-Sided Uprights, (1) MB-C-6-48-G Brace Set, (8) MSA-C-36-G 36" Arms | 1,600 lb. | 810 |
| HEAVY-DUTY GALVANIZED CANTILEVER RACK KITS | | | |
| HU-C-8-36-G-SET | (2) HU-C-8-36-G 8' High Single-Sided Uprights, (1) HB-C-8-6-G Brace Set, (4) HSA-C-36-G 36" Arms | 2,400 lb. | 810 |
| HDU-C-8-24-G-SET | (2) HDU-C-8-24-G 8' High Double-Sided Uprights, (1) HB-C-8-6-G Brace Set, (8) HSA-C-24-G 24" Arms | 8,000 lb. | 890 |
| HDU-C-8-36-G-SET | (2) HDU-C-8-36-G 8' High Double-Sided Uprights, (1) HB-C-8-6-G Brace Set, (8) HSA-C-36-G 36" Arms | 4,800 lb. | 1016 |

Standard-Duty Cantilever Racking


Standard Duty Cantilever Rack Systems are great for manufacturing and distributing facilities. The steel construction provides strength and durability, which allows the unit to withstand the harshest of environments. The adjustable arms allow the unit to be customized to fit the needs of individual circumstances. Individual components are sold separately to accommodate your requirements. *Capacity listed is per upright.

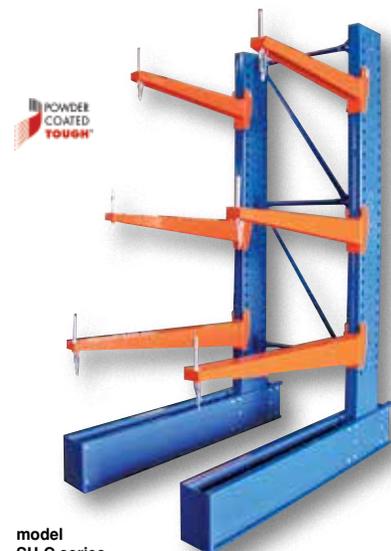


model
SU-C series
(shown assembled)

| SINGLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|----------------------------------|-------------|-------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| SU-C-6-12 | 72" | 25 ³ / ₈ " | 12" | 5,500 lb. | 172 |
| SU-C-6-18 | 72" | 31" | 18" | 4,300 lb. | 182 |
| SU-C-6-24 | 72" | 37" | 24" | 3,800 lb. | 195 |
| SU-C-6-36 | 72" | 49 ³ / ₈ " | 30" / 36" | 3,000 / 2,600 lb. | 198 |
| SU-C-8-12 | 96" | 25 ³ / ₈ " | 12" | 5,000 lb. | 186 |
| SU-C-8-18 | 96" | 31" | 18" | 4,000 lb. | 191 |
| SU-C-8-24 | 96" | 37" | 24" | 3,500 lb. | 197 |
| SU-C-8-36 | 96" | 49 ³ / ₈ " | 30" / 36" | 2,700 / 2,400 lb. | 208 |
| SU-C-10-12 | 120" | 25 ³ / ₈ " | 12" | 4,600 lb. | 214 |
| SU-C-10-18 | 120" | 31" | 18" | 3,600 lb. | 219 |
| SU-C-10-24 | 120" | 37" | 24" | 3,200 lb. | 225 |
| SU-C-10-36 | 120" | 49 ³ / ₈ " | 30" / 36" | 2,500 / 2,100 lb. | 237 |

| DOUBLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|------|-------------|-------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| SDU-C-6-12 | 72" | 34" | 12" | 11,000 lb. | 183 |
| SDU-C-6-18 | 72" | 46" | 18" | 8,600 lb. | 183 |
| SDU-C-6-24 | 72" | 58" | 24" | 7,700 lb. | 195 |
| SDU-C-6-36 | 72" | 82" | 30" / 36" | 6,000 / 5,200 lb. | 215 |
| SDU-C-8-12 | 96" | 34" | 12" | 10,100 lb. | 197 |
| SDU-C-8-18 | 96" | 46" | 18" | 8,000 lb. | 208 |
| SDU-C-8-24 | 96" | 58" | 24" | 7,100 lb. | 219 |
| SDU-C-8-36 | 96" | 82" | 30" / 36" | 5,500 / 4,800 lb. | 242 |
| SDU-C-10-12 | 120" | 34" | 12" | 9,300 lb. | 225 |
| SDU-C-10-18 | 120" | 46" | 18" | 7,300 lb. | 236 |
| SDU-C-10-24 | 120" | 58" | 24" | 6,500 lb. | 249 |
| SDU-C-10-36 | 120" | 82" | 30" / 36" | 5,000 / 4,300 lb. | 270 |



model
SSA-C-18



series
SB-C brace set

| STRAIGHT ARMS | | | |
|---------------|--------------------------|------------|----------------|
| MODEL NUMBER | UNIFORM CAPACITY PER ARM | ARM LENGTH | WEIGHT (POUND) |
| SSA-C-12 | 800 lb. | 12" | 10 |
| SSA-C-18 | 600 lb. | 18" | 12 |
| SSA-C-24 | 400 lb. | 24" | 15 |
| SSA-C-30 | 300 lb. | 30" | 17 |
| SSA-C-36 | 200 lb. | 36" | 21 |

| 10° INCLINED ARMS | | | |
|-------------------|--------------------------|------------|----------------|
| MODEL NUMBER | UNIFORM CAPACITY PER ARM | ARM LENGTH | WEIGHT (POUND) |
| SIA-C-12 | 800 lb. | 12" | 10 |
| SIA-C-18 | 600 lb. | 18" | 12 |
| SIA-C-24 | 400 lb. | 24" | 15 |
| SIA-C-30 | 300 lb. | 30" | 17 |
| SIA-C-36 | 200 lb. | 36" | 21 |

| BRACE SETS FOR 6 FOOT UPRIGHTS | | |
|--------------------------------|--------|----------------|
| MODEL NUMBER | LENGTH | WEIGHT (POUND) |
| SB-C-6-36 | 36" | 26 |
| SB-C-6-48 | 48" | 38 |
| SB-C-6-60 | 60" | 44 |
| SB-C-6-72 | 72" | 50 |
| SB-C-6-96 | 96" | 64 |

| BRACE SETS FOR 8 FOOT UPRIGHTS | | |
|--------------------------------|--------|----------------|
| MODEL NUMBER | LENGTH | WEIGHT (POUND) |
| SB-C-8-36 | 36" | 28 |
| SB-C-8-48 | 48" | 42 |
| SB-C-8-60 | 60" | 48 |
| SB-C-8-72 | 72" | 52 |
| SB-C-8-96 | 96" | 66 |

| BRACE SETS FOR 10 FOOT UPRIGHTS | | |
|---------------------------------|--------|----------------|
| MODEL NUMBER | LENGTH | WEIGHT (POUND) |
| SB-C-10-36 | 36" | 30 |
| SB-C-10-48 | 48" | 44 |
| SB-C-10-60 | 60" | 50 |
| SB-C-10-72 | 72" | 54 |
| SB-C-10-96 | 96" | 90 |


Medium-Duty Cantilever Racking

Medium-Duty Cantilever Racks are ideal for manual loading; open design allows easy forklift accessibility. Store bar stock, pipe, tubing, lumber, and other hard-to-stock items that must be kept off the floor. Arms are adjustable up and down the full length of the upright. There is 3½" between arm slots. To adjust, align arms with pre-drilled slots and secure with key lock (included). All arms feature 2¾" lips to prevent product from falling off. Uprights and arms are sold each, not in pairs. Custom rack systems can be designed for your special application. Baked-in powder-coated toughness. *Capacity listed is per upright.




model
MU-C-8-24

SINGLE-SIDED series MU-C (shown with arms and brace set)

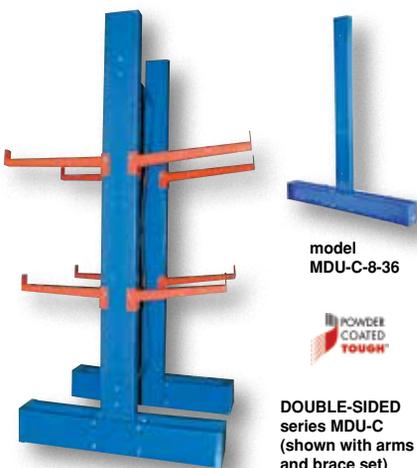


model
MDU-C-8-36


DOUBLE-SIDED series MDU-C (shown with arms and brace set)



STRAIGHT ARMS series MSA-C



INCLINED ARMS series MIA-C



BRACE SET series MB-C

| SINGLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|----------------------------------|-------------|-------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| MU-C-6-12 | 72" | 25 ³ / ₈ " | 12" | 8,100 lb. | 161 |
| MU-C-6-18 | 72" | 31" | 18" | 6,600 lb. | 164 |
| MU-C-6-24 | 72" | 37" | 24" | 5,500 lb. | 170 |
| MU-C-6-36 | 72" | 49 ³ / ₈ " | 30" / 36" | 4,700 / 4,100 lb. | 183 |
| MU-C-8-12 | 96" | 25 ³ / ₈ " | 12" | 7,600 lb. | 186 |
| MU-C-8-18 | 96" | 31" | 18" | 6,300 lb. | 191 |
| MU-C-8-24 | 96" | 37" | 24" | 5,300 lb. | 197 |
| MU-C-8-36 | 96" | 49 ³ / ₈ " | 30" / 36" | 4,500 / 4,000 lb. | 208 |
| MU-C-10-12 | 120" | 25 ³ / ₈ " | 12" | 7,100 lb. | 214 |
| MU-C-10-18 | 120" | 31" | 18" | 5,900 lb. | 219 |
| MU-C-10-24 | 120" | 37" | 24" | 5,000 lb. | 225 |
| MU-C-10-36 | 120" | 49 ³ / ₈ " | 30" / 36" | 4,400 / 3,800 lb. | 237 |

| DOUBLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|------|-------------|-------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| MDU-C-6-12 | 72" | 34" | 12" | 16,200 lb. | 172 |
| MDU-C-6-18 | 72" | 46" | 18" | 13,200 lb. | 183 |
| MDU-C-6-24 | 72" | 58" | 24" | 11,000 lb. | 195 |
| MDU-C-6-36 | 72" | 82" | 30" / 36" | 9,400 / 8,200 lb. | 215 |
| MDU-C-8-12 | 96" | 34" | 12" | 15,200 lb. | 197 |
| MDU-C-8-18 | 96" | 46" | 18" | 12,600 lb. | 208 |
| MDU-C-8-24 | 96" | 58" | 24" | 10,500 lb. | 219 |
| MDU-C-8-36 | 96" | 82" | 30" / 36" | 9,000 / 8,000 lb. | 242 |
| MDU-C-10-12 | 120" | 34" | 12" | 14,200 lb. | 225 |
| MDU-C-10-18 | 120" | 46" | 18" | 11,800 lb. | 236 |
| MDU-C-10-24 | 120" | 58" | 24" | 10,000 lb. | 249 |
| MDU-C-10-36 | 120" | 82" | 30" / 36" | 8,800 / 7,600 lb. | 270 |

| STRAIGHT ARMS WITH LIPS | | | |
|-------------------------|--------------------------|------------|----------------|
| MODEL NUMBER | UNIFORM CAPACITY PER ARM | ARM LENGTH | WEIGHT (POUND) |
| MSA-C-12 | 1,000 lb. | 12" | 10 |
| MSA-C-18 | 750 lb. | 18" | 12 |
| MSA-C-24 | 600 lb. | 24" | 15 |
| MSA-C-30 | 500 lb. | 30" | 17 |
| MSA-C-36 | 400 lb. | 36" | 21 |

| 10° INCLINED ARMS WITH LIPS | | | |
|-----------------------------|--------------------------|------------|----------------|
| MODEL NUMBER | UNIFORM CAPACITY PER ARM | ARM LENGTH | WEIGHT (POUND) |
| MIA-C-12 | 1,000 lb. | 12" | 10 |
| MIA-C-18 | 750 lb. | 18" | 12 |
| MIA-C-24 | 600 lb. | 24" | 15 |
| MIA-C-30 | 500 lb. | 30" | 17 |
| MIA-C-36 | 400 lb. | 36" | 21 |

| BRACE SETS FOR 6 FOOT UPRIGHTS | | |
|--------------------------------|--------|--------------|
| MODEL NUMBER | LENGTH | WEIGHT (LB.) |
| MB-C-6-36 | 36" | 26 |
| MB-C-6-48 | 48" | 38 |
| MB-C-6-60 | 60" | 44 |
| MB-C-6-72 | 72" | 50 |
| MB-C-6-96 | 96" | 64 |

| BRACE SETS FOR 8 FOOT UPRIGHTS | | |
|--------------------------------|--------|--------------|
| MODEL NUMBER | LENGTH | WEIGHT (LB.) |
| MB-C-8-36 | 36" | 28 |
| MB-C-8-48 | 48" | 42 |
| MB-C-8-60 | 60" | 48 |
| MB-C-8-72 | 72" | 52 |
| MB-C-8-96 | 96" | 66 |

| BRACE SETS FOR 10 FOOT UPRIGHTS | | |
|---------------------------------|--------|--------------|
| MODEL NUMBER | LENGTH | WEIGHT (LB.) |
| MB-C-10-36 | 36" | 30 |
| MB-C-10-48 | 48" | 44 |
| MB-C-10-60 | 60" | 50 |
| MB-C-10-72 | 72" | 54 |
| MB-C-10-96 | 96" | 90 |

Heavy-Duty Cantilever Racking

Heavy-Duty Cantilever Racks are completely adjustable for application specific design flexibility. Long, unwelded stock is handled quickly and efficiently by forklift; instant accessibility to one piece or a full load. Arms are adjustable up and down the length of the upright. Pre-drilled holes on the uprights are spaced every 3/2" for bolt-on arm placement (hardware included). All arms feature lips to prevent product from falling off. Standard arms have a 3/8" lip. Heavy-duty and extra heavy-duty have a 3/4" lip. Uprights and arms are sold each, not in pairs. Custom rack systems can be designed for your special application. *Capacity listed is per upright.

| SINGLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|---------|-------------|---------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| HU-C-8-18 | 96" | 28 1/4" | 18" | 24,700 lb. | 265 |
| HU-C-8-24 | 96" | 36 1/2" | 24" | 21,500 lb. | 275 |
| HU-C-8-36 | 96" | 48 1/2" | 30" / 36" | 18,300 / 16,000 lb. | 292 |
| HU-C-8-48 | 96" | 60 1/2" | 42" / 48" | 14,200 / 12,800 lb. | 310 |
| HU-C-10-18 | 120" | 28 1/4" | 18" | 24,700 lb. | 313 |
| HU-C-10-24 | 120" | 36 1/2" | 24" | 21,500 lb. | 323 |
| HU-C-10-36 | 120" | 48 1/2" | 30" / 36" | 18,300 / 16,000 lb. | 340 |
| HU-C-10-48 | 120" | 60 1/2" | 42" / 48" | 14,200 / 12,800 lb. | 357 |
| HU-C-12-18 | 144" | 28 1/4" | 18" | 24,400 lb. | 351 |
| HU-C-12-24 | 144" | 36 1/2" | 24" | 20,900 lb. | 362 |
| HU-C-12-36 | 144" | 48 1/2" | 30" / 36" | 17,800 / 15,600 lb. | 378 |
| HU-C-12-48 | 144" | 60 1/2" | 42" / 48" | 13,900 / 12,500 lb. | 396 |
| HU-C-14-18 | 168" | 28 1/4" | 18" | 23,400 lb. | 390 |
| HU-C-14-24 | 168" | 36 1/2" | 24" | 20,200 lb. | 401 |
| HU-C-14-36 | 168" | 48 1/2" | 30" / 36" | 17,600 / 15,400 lb. | 417 |
| HU-C-14-48 | 168" | 60 1/2" | 42" / 48" | 13,700 / 12,400 lb. | 435 |


| DOUBLE-SIDED UPRIGHTS | | | | | |
|-----------------------|--------|------|-------------|---------------------|----------------|
| MODEL NUMBER | HEIGHT | BASE | ARMS TO USE | *UNIFORM CAPACITY | WEIGHT (POUND) |
| HDU-C-8-18 | 96" | 46" | 18" | 49,400 lb. | 288 |
| HDU-C-8-24 | 96" | 58" | 24" | 43,000 lb. | 307 |
| HDU-C-8-36 | 96" | 82" | 30" / 36" | 36,600 / 32,000 lb. | 342 |
| HDU-C-8-48 | 96" | 106" | 42" / 48" | 28,400 / 25,600 lb. | 378 |
| HDU-C-10-18 | 120" | 46" | 18" | 49,200 lb. | 336 |
| HDU-C-10-24 | 120" | 58" | 24" | 42,600 lb. | 355 |
| HDU-C-10-36 | 120" | 82" | 30" / 36" | 36,400 / 31,600 lb. | 391 |
| HDU-C-10-48 | 120" | 106" | 42" / 48" | 28,200 / 25,200 lb. | 427 |
| HDU-C-12-18 | 144" | 46" | 18" | 48,800 lb. | 374 |
| HDU-C-12-24 | 144" | 58" | 24" | 41,800 lb. | 393 |
| HDU-C-12-36 | 144" | 82" | 30" / 36" | 35,600 / 31,200 lb. | 429 |
| HDU-C-12-48 | 144" | 106" | 42" / 48" | 27,800 / 25,000 lb. | 465 |
| HDU-C-14-18 | 168" | 46" | 18" | 46,800 lb. | 413 |
| HDU-C-14-24 | 168" | 58" | 24" | 40,400 lb. | 432 |
| HDU-C-14-36 | 168" | 82" | 30" / 36" | 35,200 / 30,800 lb. | 467 |
| HDU-C-14-48 | 168" | 106" | 42" / 48" | 27,400 / 24,800 lb. | 507 |

| STRAIGHT & INCLINE ARMS | | | | |
|--------------------------|--------|--------------|----------------------------|---------------------------|
| UNIFORM CAPACITY PER ARM | LENGTH | WEIGHT (LB.) | STRAIGHT ARMS MODEL NUMBER | INCLINE ARMS MODEL NUMBER |
| 2,500 lb. | 18" | 16 | HSA-C-18 | HIA-C-18 |
| 2,000 lb. | 24" | 21 | HSA-C-24 | HIA-C-24 |
| 1,500 lb. | 30" | 22 | HSA-C-30 | HIA-C-30 |
| 1,200 lb. | 36" | 26 | HSA-C-36 | HIA-C-36 |
| 1,100 lb. | 42" | 29 | HSA-C-42 | HIA-C-42 |
| 1,000 lb. | 48" | 32 | HSA-C-48 | HIA-C-48 |

| HEAVY-DUTY AND EXTRA HEAVY-DUTY ARMS | | | |
|--------------------------------------|--------------------------|--------|--------------|
| MODEL NUMBER | UNIFORM CAPACITY PER ARM | LENGTH | WEIGHT (LB.) |
| HDSA-C-36 | 2,175 lb. | 36" | 26 |
| XHDSA-C-36 | 3,400 lb. | 36" | 30 |
| HDSA-C-42 | 1,865 lb. | 42" | 29 |
| XHDSA-C-42 | 2,900 lb. | 42" | 33 |
| HDSA-C-48 | 1,630 lb. | 48" | 31 |
| HDSA-C-48M | 2,000 lb. | 48" | 31 |
| XHDSA-C-48 | 2,500 lb. | 48" | 36 |

| BRACE SETS FOR 8 & 10 FOOT UPRIGHTS | | | |
|-------------------------------------|----------------|---------|----------------|
| MODEL NUMBER | UPRIGHT HEIGHT | LENGTH | WEIGHT (POUND) |
| HB-C-8-3 | 96"-120" | 35 1/2" | 28 |
| HB-C-8-4 | 96"-120" | 47 1/2" | 31 |
| HB-C-8-5 | 96"-120" | 59 1/2" | 38 |
| HB-C-8-6 | 96"-120" | 71 1/2" | 43 |
| HB-C-8-7 | 96"-120" | 83 1/2" | 98 |
| HB-C-8-8 | 96"-120" | 95 1/2" | 107 |


| BRACE SETS FOR 12 & 14 FOOT UPRIGHTS | | | |
|--------------------------------------|----------------|---------|----------------|
| MODEL NUMBER | UPRIGHT HEIGHT | LENGTH | WEIGHT (POUND) |
| HB-C-14-3 | 144" - 168" | 35 1/2" | 44 |
| HB-C-14-4 | 144" - 168" | 47 1/2" | 48 |
| HB-C-14-5 | 144" - 168" | 59 1/2" | 56 |
| HB-C-14-6 | 144" - 168" | 71 1/2" | 66 |
| HB-C-14-7 | 144" - 168" | 83 1/2" | 78 |
| HB-C-14-8 | 144" - 168" | 95 1/2" | 123 |

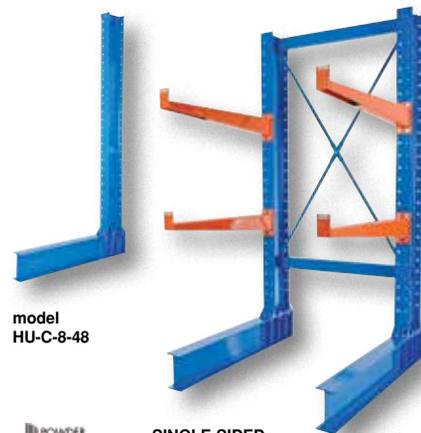

model HU-C-8-48



SINGLE-SIDED series HU-C (shown with arms and brace set)

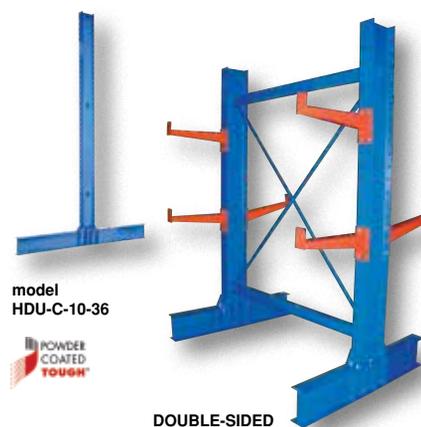

model HDU-C-10-36



DOUBLE-SIDED series HDU-C (shown with arms and brace set)

STRAIGHT ARMS WITH LIPS series HSA-C



10° INCLINED ARMS WITH LIPS series HIA-C



HB-C-8 & HB-C-14 STYLE BRACE SETS



model CANT-3648




Cantilever Carts

Portable Cantilever Carts for storage of bar stock type items. Each cart includes three pairs of arms. Arm height adjustable in 6" increments. Arms are secured to cart with a bolt and nut and each arm features two holes so that it may be attached in the level or inclined position. Height of lowest arm position is 18¾", while the highest position is 60¾". The 10" high base includes built-in fork pockets that are 5¾"W x 2"H usable. Units roll on two (2) rigid and two (2) locking swivel 6" x 2" casters. All steel construction with blue, baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL SIZE (W x L x H) | UNIFORM LOAD CAPACITY | ARM LENGTH | UNIFORM CAPACITY/LEVEL | WEIGHT (POUND) |
|--------------|--|-----------------------|------------|------------------------|----------------|
| CANT-3048 | 30" x 48 ⁹ / ₁₆ " x 64 ¹¹ / ₁₆ " | 2,000 lb. | 24" | 400 lb. | 212 |
| CANT-3648 | 36" x 48 ⁹ / ₁₆ " x 64 ¹¹ / ₁₆ " | 2,000 lb. | 30" | 400 lb. | 226 |
| CANT-3060 | 30" x 60 ⁹ / ₁₆ " x 64 ¹¹ / ₁₆ " | 2,000 lb. | 24" | 400 lb. | 225 |
| CANT-A30 | EXTRA PAIR OF 24" USABLE ARMS | | | | 12 |
| CANT-A36 | EXTRA PAIR OF 30" USABLE ARMS | | | | 14 |



model FLOW-4-3



EXTRA ROLLER TRACK SECTION
model FLO-4-RLR

Carton Flow Racks

Cartons are gravity fed on rollers for convenient first in / first out stock rotating. Choose the quantity of levels that best fits your application. Each level has a 1,000 pound uniform capacity and includes four pairs of rollers with 50 pounds per foot capacity. Each level also includes five divider sections. The width of each level is 96". All models are 84" high. Assembly required. Units can be bolted together for additional depth. Baked-in powder-coated toughness.

| MODEL NUMBER | WIDTH OF LEVELS | OVERALL HEIGHT | OVERALL DEPTH | QUANTITY OF FLOW LEVELS | WEIGHT (POUND) |
|--|---|----------------|---------------|-------------------------|----------------|
| FLOW-3-3 | 96" | 84" | 36" | 3 | 311 |
| FLOW-3-4 | 96" | 84" | 36" | 4 | 388 |
| FLOW-3-5 | 96" | 84" | 36" | 5 | 429 |
| FLOW-4-3 | 96" | 84" | 48" | 3 | 373 |
| FLOW-4-4 | 96" | 84" | 48" | 4 | 407 |
| FLOW-4-5 | 96" | 84" | 48" | 5 | 474 |
| FLOW-WD-36 | Wooden top shelf, 36" deep, 1,000 lb. cap. (include braces) | | | | 96 |
| FLOW-WD-48 | Wooden top shelf, 48" deep, 1,000 lb. cap. (include braces) | | | | 96 |
| EXTRA ROLLER & TRACK SECTIONS | | | | | |
| FLO-3-RLR | EXTRA ROLLER TRACK SECTION - 36" LONG | | | | 2 |
| FLO-3-DIVD | EXTRA DIVIDER SECTION - 36" LONG | | | | 2 |
| FLO-4-RLR | EXTRA ROLLER TRACK SECTION - 48" LONG | | | | 3 |
| FLO-4-DIVD | EXTRA DIVIDER SECTION - 48" LONG | | | | 3 |



model VRSOR-54



Heavy Duty Roll-Out Shelving


Roll-out shelving racks store heavy dies, fixtures, and machinery. Capacity per shelf is 1,500 pounds evenly distributed with a total uniform capacity of 6,000 pounds. Shelves roll out for convenient loading and retrieving. Can be easily loaded and unloaded with a crane, overhead hoist, forklift, or stacker. Individual shelf heights are adjustable on 2¾" centers. Features 10 gauge steel shelves that can extend 20", one (1) at a time, and locked in the extended position for maximum safety. Top shelf is fixed, non-adjustable. Add on units are available. All steel construction with baked-in powder-coated toughness. Ships unassembled. Three (3) shelves per side of the VRSOR-114.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | SHELF SIZE (W x D) | NUMBER OF SHELVES | WEIGHT (POUND) |
|--------------|--------------------|--------------------------|--------------------|-------------------|----------------|
| VRSOR-54 | SINGLE | 57" x 32" x 80" | 52" x 32" | 3 | 395 |
| VRSOR-114 | DOUBLE | 114" x 32" x 80" | 52" x 32" | 6 | 792 |
| VRSOR-A-114 | ADD-ON | 54" x 32" x 80" | 52" x 32" | 3 | 392 |
| VRSOR-SLF | ADDITIONAL SHELVES | | | | 110 |

Single/Dual Sided Bar Stock Trees

Starter unit includes two uprights and one set of cross braces. Storage room is increased when the add-on unit is ordered. Add-on unit consists of one upright and one set of cross braces for joining to the starter set. Uniform capacity is 500 pounds per arm. Distance between levels is 10". There are 7 storage levels. Choose either single sided or double sided steel racks. Each upright requires four (4) anchor bolts, sold separately. Steel construction with painted finish.

| MODEL NUMBER | STYLE | DESCRIPTION | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|--------------|---|--------------|---|----------------|
| BAR-R-84-S | SINGLE SIDED | STARTER UNIT | 84 ¹ / ₁₆ " x 38 ¹ / ₂ " x 80 ¹ / ₂ " | 450 |
| BAR-R-84-D | DOUBLE SIDED | STARTER UNIT | 84 ¹ / ₁₆ " x 38 ¹ / ₂ " x 80 ¹ / ₂ " | 490 |
| BAR-A-84-S | SINGLE SIDED | ADD-ON UNIT | 62" x 38 ¹ / ₂ " x 80 ¹ / ₂ " | 227 |
| BAR-A-84-D | DOUBLE SIDED | ADD-ON UNIT | 62" x 38 ¹ / ₂ " x 80 ¹ / ₂ " | 235 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4" | | | 4 |

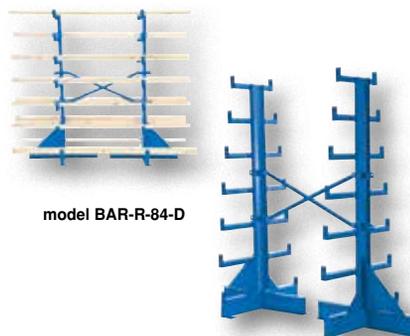


model BAR-R-84-D

Double Sided Horizontal Bar Rack

Ideal for use in maintenance departments, tool rooms, machine shops, and storage areas. Arms extend and act as dividers creating bays of storage. Nine arm levels can store material up to 10 feet long. Aligning two units next to each other will allow for the storage of longer material. Arm edges are sloped upward to prevent roll off's. Arms are welded at 6" increments with 6" between levels. Total uniform rack capacity is 2,600 pounds evenly distributed. Unit is supplied with lag down points and ships knocked down. Steel construction with baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL WIDTH | OVERALL DEPTH | OVERALL HEIGHT | ARM LEVELS | DISTANCE BETWEEN LEVELS | WEIGHT (POUND) |
|--------------|---------------|----------------------------------|----------------------------------|------------|-------------------------|----------------|
| DSHZ-4 | 30" | 30 ¹ / ₄ " | 83 ⁷ / ₈ " | 9 | 6" | 145 |

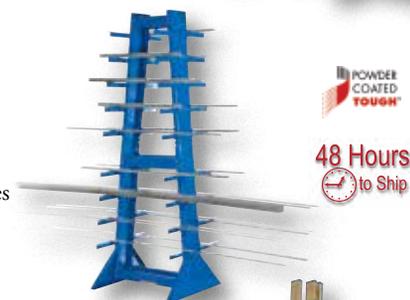

model DSHZ-4

Vertical Storage Racks

Designed for vertical storage of tubing, pipe, and other types of similar materials. Organize pipes and extrusions with odd lengths instead of discarding them. Each rack has four (4) bays that measure 9³/₄" wide each and handles a uniform capacity of 1,500 pounds per bay. Designed to be placed up against a wall. A restraint chain securely holds items in storage bays. Fully welded steel construction with baked-in powder-coated toughness. Unit is shipped with lag down points.

Model SSRT-47-2SF contains two 24" deep shelves on the back of the unit. One on the bottom and one in the middle that is 36-3/16" high.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | NUMBER OF BAYS | DISTANCE BETWEEN BAYS | WEIGHT (POUND) |
|------------------|--|----------------|---------------------------------|----------------|
| SSRT-47 | 48 ¹ / ₂ " x 24" x 60 ⁷ / ₈ " | 4 | 9 ³ / ₄ " | 185 |
| SSRT-47-HP | 48 ¹ / ₂ " x 36" x 92" | 4 | 9 ³ / ₄ " | 239 |
| SSRT-47-DRC-2500 | STORAGE RACK CART | | | |
| SSRT-47-2SF | 48 ³ / ₈ " x 48 ¹ / ₂ " x 60 ⁷ / ₈ " | 4 | 9 ³ / ₄ " | 205 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4" | | | 4 |



48 Hours to Ship



model SSRT-47-HP

model SSRT-47

Vertical Bar Rack

Designed for storage of long parts close to the work site. Long pieces stack vertically while shorter parts are kept horizontal on the three pan shelves. Designed to be placed up against a wall. Unit is supplied with lag down points. Includes a restraint chain to hold items in each bay. The uniform capacity is 3,000 pounds when evenly distributed. Bolt together design with blue painted finish. Some assembly is required.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | NUMBER OF BAYS | DISTANCE BETWEEN SHELVES | WEIGHT (POUND) |
|--------------|---|----------------|----------------------------------|----------------|
| VBR-9 | 39 ¹ / ₄ " x 24" x 84 ¹ / ₂ " | 3 | 18 ¹ / ₂ " | 152 |



48 Hours to Ship

model VBR-9

Expandable Vertical Bar Racks

Designed for storage of long parts. Designed to be placed up against a wall. Order starter rack then extension rack for added width. Each rack includes three (3) adjustable dividers. Multiple units may be joined in-line or back-to-back. Total uniform capacity is 4,000 pounds when evenly distributed. Welded steel construction with blue painted finish. Ships knocked down, assembly required. Requires two (2) anchor bolts, sold separately.

| MODEL NUMBER | TYPE | OVERALL SIZE (W x D x H) | DISTANCE BETWEEN BAYS | WEIGHT (POUND) |
|--------------|--|---|---------------------------------|----------------|
| EVR-59-S | STARTER | 53" x 21 ³ / ₄ " x 59 ¹⁷ / ₃₂ " | 4 ¹ / ₂ " | 176 |
| EVR-59-EXT | EXTENSION | 51" x 21 ³ / ₄ " x 59 ¹⁷ / ₃₂ " | 4 ¹ / ₂ " | 145 |
| EVR-106-S | STARTER | 53" x 23" x 106 ¹⁷ / ₃₂ " | 4 ¹ / ₂ " | 202 |
| EVR-106-EXT | EXTENSION | 51" x 23" x 106 ¹⁷ / ₃₂ " | 4 ¹ / ₂ " | 176 |
| AS-124 | ANCHOR BOLT FOR CONCRETE (1) 1/2" x 4" | | | 1 |



48 Hours to Ship

model EVR-59-S



model SHEET-R-57

48 Hours to Ship



Horizontal Sheet Rack

Designed for storage of sheet goods and similar materials. Flat storage reduces warping of thin materials. Five shelf design allows for generous storage of multiple thickness materials. Distance between shelves is 9½". All welded steel frame allows for 2,000 pound uniform capacity per shelf. Four sided access when using 4' x 8' sheet or smaller. Supplied with lag down points.

| MODEL NUMBER | OVERALL SIZE (W x L x H) | NUMBER OF SHELVES | DISTANCE BETWEEN SHELVES | WEIGHT (POUND) |
|--------------|---------------------------------------|-------------------|--------------------------|----------------|
| SHEET-R-57 | 54½" x 102¾" x 48" | 5 | 9½" | 514 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) ½" x 4" | | | 4 |



48 Hours to Ship

POWDER COATED TOUGH

model VSSR-15

YouTube

Standard Sheet Rack


Designed for vertical, or horizontal, storage of sheet goods. Standard unit comes with four (4) bays. Intermediate floor bracing gives added steel support, while keeping material off the floor. Uniform capacity per bay is 1,500 pounds. Unit is supplied with lag down points. Baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL SIZE (W x L x H) | NUMBER OF BAYS | DISTANCE BETWEEN BAYS | WEIGHT (POUND) |
|--------------|---------------------------------------|----------------|-----------------------|----------------|
| VSSR-15 | 50" x 84" x 44" | 4 | 10" | 290 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) ½" x 4" | | | 4 |



48 Hours to Ship

model U-RACK-10



Portable Storage U-Racks

These Storage Racks can be stacked up to four units high. Easy to set up and tear down and great for temporary locations. All welded steel construction for years of dependable service. Maximum four (4) units high. Safety pins connect racks together. (Sold individually.)

| MODEL NUMBER | OUTSIDE SIZE (W x D x H) | INSIDE DIMENSION (W (bottom) x W (top) x H) | UNIFORM CAPACITY/PAIR | WEIGHT (POUND) |
|--------------|--------------------------|---|-----------------------|----------------|
| U-RACK-6 | 25" x 4" x 19" | 16" x 21½" x 15½" | 6,000 lb. | 31 |
| U-RACK-10 | 25" x 4½" x 19" | 16" x 21½" x 18" | 10,000 lb. | 35 |



48 Hours to Ship

POWDER COATED TOUGH

model VHSR-4

Variable Height Sheet Racks

Store various sizes of sheet goods in the vertical position for easy viewing of stock. These sheet racks are perfect for use with multiple sizes of material. Four bays with different heights increase visibility of stored material. Available in all welded steel construction, model VHSR-4 and VHSR-8, or bolt together construction, model VHSR-4B. Bolt-together units feature adjustable-width uprights. Uniform capacity per bay is 1,500 pounds. Unit is supplied with lag down points. Baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | NUMBER OF BAYS | DISTANCE BETWEEN BAYS | WEIGHT (POUND) |
|--------------|---------------------------------------|----------------|-----------------------|----------------|
| VHSR-4 | 47¾" x 36" x 41¾" | 4 | 6⅞" | 170 |
| VHSR-8 | 96" x 36" x 60" | 4 | 6⅞" | 268 |
| VHSR-4B | 47½" x 36" x 42" | 4 | 6⅞" | 178 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) ½" x 4" | | | 4 |



Portable / Stackable Vertical Sheet Rack

The Vertical Sheet Rack supports multiple sizes of sheet material such as paneling, plywood, drywall, or anything that is long, bulky, and hard to handle. Ideal for lumberyards and hardware stores. Integral full length fork tubes standard for easy moving and handling with a fork truck. Industrial welded steel construction with blue paint finish. Stack no more than two units high. Uniform capacity is 4,000 pounds (2,500 pounds for second when stacked).



Fork Pockets

model SVSR-3260

| MODEL NUMBER | OVERALL SIZE (W x L x H) | USABLE STORAGE BAY SIZE (W x H) | WEIGHT (POUND) |
|--------------|--------------------------|---------------------------------|----------------|
| SVSR-3260 | 32½" x 60" x 46" | 16½" x 42" | 355 |


Internestable Portable Stackable Rack Systems with Adjustable & Fixed Posts

Unique transport and storage racks will stack and nest for maximum versatility. Remove or change post heights depending on application. All heights noted are for load heights. Each unit features a uniform capacity of 4,000 pounds. Design allows for stacking up to two (2) units high. Solid steel deck construction. Rugged welded steel construction with blue, baked-in powder-coated toughness. Large target and pintle for speedy alignment. Units are available with fork lift pockets, solid decking, and caster kits. Contact factory for quote.



| MODEL NUMBER | USABLE SIZE (W x L) | OVERALL SIZE (W x L) | WEIGHT (POUND) |
|---|---------------------|---|----------------|
| NON-REMOVABLE ADJUSTABLE POSTS 29³/₁₆" - 35³/₁₆"H IN 1" INCREMENTS | | | |
| NEST-F-4848 | 48" x 48" | 55 ¹ / ₂ " x 51 ³ / ₄ " | 263 |
| NEST-F-6048 | 60" x 48" | 67 ¹ / ₂ " x 51 ³ / ₄ " | 399 |

| MODEL NUMBER | USABLE SIZE (W x L) | OVERALL SIZE (W x L) | WEIGHT (POUND) |
|------------------|---------------------|---|----------------|
| BASE ONLY | | | |
| BASE-4848 | 48" x 48" | 55 ¹ / ₂ " x 51 ³ / ₄ " | 90 |
| BASE-6048 | 60" x 48" | 67 ¹ / ₂ " x 51 ³ / ₄ " | 113 |

| MODEL NUMBER | USABLE HEIGHT | QUANTITY PER BOX | WEIGHT (POUND) |
|---|----------------------------------|------------------|----------------|
| FIXED HEIGHT REMOVABLE POSTS (SET OF FOUR) | | | |
| POST-24 | 24 ⁵ / ₈ " | 4 | 60 |
| POST-36 | 36 ⁵ / ₈ " | 4 | 62 |
| POST-48 | 48 ⁵ / ₈ " | 4 | 64 |

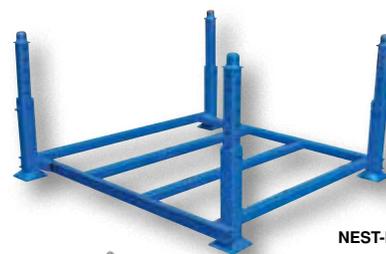

model
NEST-F-4848

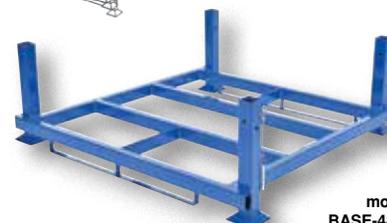

model
BASE-4848



Fixed Height Removable
Posts (set of 4)
series POST

Versa Racks

Versa Racks are great for transporting or storing items. Steel construction provides versatility, efficiency, and durability. Baked-in powder-coated toughness. Corner posts can be removed or changed to fit the needs of various applications. Double post pins provide support up to 4,000 uniform pounds. All models contain a four way fork entry for simple transference and can be stacked five (5) units high, while models using the 24" and 36" posts can be stacked three (3) high, during use. Four-way fork entry on all models. Usable fork opening is 8"W x 2-1/2"H. The overall model size is 49-7/16"W x 43-7/16"L. Custom sizes and configurations are available upon request.


Model V-1 has four adjustable-height non-removable posts, fixed base targets, 4-way fork entry, and solid steel deck. The usable height is adjustable in 1" increments from 11¹/₄" to 17¹/₄". These carts may be stacked no more than five (5) units high.

Model V-3 is ideal for transporting long, oversized loads of material. The model is a stand/cart which has 8" phenolic caster and a floor lock. 12" high non-removable fixed-height corner posts. Overall height is 30¹/₂".

Model V-4 is a versa rack pallet with no posts or sockets. Solid deck steel pallet is a durable way to transfer products.

Model V-2 is a versa rack base, with no posts. Sockets included. The V-2 and V-3 can be used together by stacking a single V-2 onto a V-3 to create a larger, more versatile, model. A four way fork entrance enables the unit to be quickly transferred from workstation to workstation.

| MODEL NUMBER | DESCRIPTION | USABLE SIZE (W x L) | WEIGHT (POUND) |
|--------------|----------------------------|---------------------|----------------|
| V-1 | BASE W/NON-REMOVABLE POSTS | 48" x 42" | 125 |
| V-3 | STAND/CART | 48" x 42" | 210 |
| V-4 | BASE, NO POSTS OR SOCKETS | 48" x 42" | 100 |
| V-2 | BASE ONLY, NO POSTS | 48" x 42" | 110 |
| VP-4 | REMOVABLE POST KIT | 4" H | 15 |
| VP-12 | REMOVABLE POST KIT | 12" H | 25 |
| VP-24 | REMOVABLE POST KIT | 24" H | 40 |
| VP-36 | REMOVABLE POST KIT | 36" H | 50 |

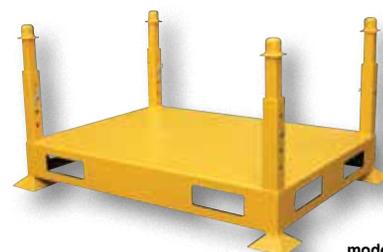

model V-1



model V-3



model V-4




SECURELY
STACKABLE



Internestable Stackable Racks

Space saving storage is what this rack is all about. The 3/4" underclearance allows for easy fork truck accessibility. Units can stack up to 20 feet high. Sturdy, welded construction gives these units an abundance of strength and stability. (A) Special redundant stacking systems allow units to be internested for space saving storage when not in use. (B) Flared posts, pintle, and target, make it easy to line up units for stacking. (C) Optional fold down post available upon request.

| MODEL NUMBER | USABLE (W x D x H) | OVERALL (W x D x H) | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|--------------------|---------------------|------------------|----------------|
| NEST-106 | 49" x 42" x 48" | 56½" x 47" x 58" | 4,000 lb. | 336 |
| NEST-210 | 49" x 48¾" x 48" | 56½" x 53" x 58" | 4,000 lb. | 306 |
| NEST-215 | 61" x 42" x 48" | 68½" x 47" x 58" | 4,000 lb. | 355 |
| NEST-230 | 61" x 48¾" x 48" | 68½" x 53" x 58" | 4,000 lb. | 375 |

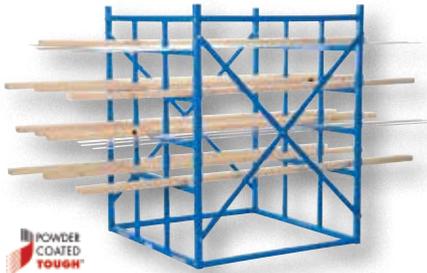

Long Bar Pigeon Hole Rack

Ideal for mixed storage of long items. Five-hole high and three-hole wide frame allows for easy identification and retrieval of materials. Frames are held in place by separator and bracing bars. 7,700 pound uniform capacity per frame. Extension bay kit, model LBPH-EXT, consists of one frame and one set of cross braces for joining to the starter set. Uniform capacity is 2,000 pounds per level or 7,700 pounds per frame. Steel construction. Baked-in powder-coated toughness.

POWDER COATED TOUGH
48 Hours to Ship

model LBPH-77

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | NUMBER OF BAYS | WEIGHT (POUND) |
|--------------|-------------------|--------------------------|----------------|----------------|
| LBPH-77 | STARTER UNIT | 48½" x 48" x 60" | 15 | 232 |
| LBPH-EXT | EXTENSION BAY KIT | 48½" x 48" x 60" | 15 | 176 |



Economical Material Racks

Model SR-WM is a wall mounted unit with dual 60" high supports. They come with three (3) 18" arms and four (4) 15" arms. The 18" arms have 9" height clearance and the 15" arms have 7¼" clearance. Uniform load capacity is 1,000 pounds. Shipped knocked down with convenient and quick assembly.

model SR-WM

Model SR-SS is a self-supporting 66" high A-frame with 7 storage levels. Arms extend up to 12" beyond A-frame. Base dimensions are 60" by 36". Shipped knocked down with convenient and quick assembly.

model SR-SS

Model SR-V is a floor-mounted vertical material rack. Features three storage bays. Shipped knocked down with convenient and quick assembly.

model SR-V

| MODEL NUMBER | DESCRIPTION | HEIGHT | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|-----------------|--------|------------------|----------------|
| SR-WM | WALL MOUNT | 60" | 1,000 lb. | 24 |
| SR-SS | SELF SUPPORTING | 66" | 2,000 lb. | 61 |
| SR-V | FLOOR MOUNTED | 72" | 2,000 lb. | 57 |



POWDER COATED TOUGH
48 Hours to Ship

Stackable Bar Cradles

These sturdy, welded steel racks are strong enough to handle heavy loads, yet light enough to be set up by one person. Stackable up to five (5) units high. Allows for custom design by choosing length, depth, and height of individual storage systems. Welded steel construction with blue painted surface. Units are sold each.



POWDER COATED TOUGH
48 Hours to Ship

model CRAD-25-44 shown two possible configurations.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | INSIDE SIZE (W x D x H) | UNIFORM CAPACITY/EACH | UNIFORM CAPACITY/PAIR | WEIGHT (POUND) |
|--------------|--------------------------|--|-----------------------|-----------------------|----------------|
| CRAD-25 | 12" x 16" x 14" | 8" x 12" x 10 ⁵ / ₈ " | 1,250 lb. | 2,500 lb. | 31 |
| CRAD-25-30 | 12" x 30" x 14" | 8" x 12" x 10 ⁵ / ₈ " | 1,250 lb. | 2,500 lb. | 78 |
| CRAD-25-44 | 12" x 44" x 14" | 8" x 12" x 10 ⁵ / ₈ " | 1,250 lb. | 2,500 lb. | 107 |
| CRAD-25-58 | 12" x 58" x 14" | 8" x 12" x 10 ⁵ / ₈ " | 1,250 lb. | 2,500 lb. | 127 |
| CRAD-25-72 | 12" x 72" x 14" | 8" x 12" x 10 ⁵ / ₈ " | 1,250 lb. | 2,500 lb. | 146 |
| CRAD-37 | 14" x 19" x 18" | 10" x 15" x 14 ⁵ / ₈ " | 1,850 lb. | 3,700 lb. | 37 |
| CRAD-56 | 15" x 22" x 21" | 11" x 18" x 17 ⁵ / ₈ " | 2,800 lb. | 5,600 lb. | 43 |
| CRAD-75 | 16" x 26" x 24" | 12" x 22" x 20½" | 3,750 lb. | 7,500 lb. | 46 |

Reel Racks

Store and dispense poly or wire rope, hose, electrical cable, or chain. 98½" units have three (3) pairs of axle brackets; 122-15/16" units have four (4) pairs of axle brackets (additional brackets available, contact factory). The axle brackets are adjustable on 2" centers and accept axles up to 2½" in diameter. Adjustable brackets allow you to stagger arms along the frame for different size reels. 2¼" diameter axles are included with reel rack. Uniform capacity per level is 2,000 pounds. Assembly required. Units must be secured to floor unless ordering Double Sided Portable Reel Racks. Orange, baked-in powder-coated toughness.

| MODEL NUMBER | OVERALL WIDTH | OVERALL DEPTH | OVERALL HEIGHT | INCLINE | TOTAL UNIFORM CAPACITY | WEIGHT (POUND) |
|--|----------------------------------|---------------|-------------------------------------|---------|------------------------|----------------|
| STARTER KITS | | | | | | |
| RERC-338 | 39¾" | 36" | 98½" | 71° | 6,000 lb. | 249 |
| RERC-438 | 51¼" | 36" | 98½" | 71° | 6,000 lb. | 264 |
| RERC-3310 | 39⅝" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 6,000 lb. | 288 |
| RERC-4310 | 51¼" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 6,000 lb. | 296 |
| RERC-338-10 | 39¾" | 36" | 98½" | 71° | 10,000 lb. | 325 |
| RERC-438-10 | 51¼" | 36" | 98½" | 71° | 10,000 lb. | 344 |
| RERC-3310-10 | 39⅝" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 10,000 lb. | 385 |
| RERC-4310-10 | 51¼" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 10,000 lb. | 409 |
| ADD-ON SECTIONS | | | | | | |
| RERC-A-338 | 36" | 36" | 98½" | 71° | 6,000 lb. | 177 |
| RERC-A-438 | 48" | 36" | 98½" | 71° | 6,000 lb. | 192 |
| RERC-A-3310 | 36" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 6,000 lb. | 202 |
| RERC-A-4310 | 48" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 6,000 lb. | 214 |
| RERC-A-338-10 | 36" | 36" | 98½" | 71° | 10,000 lb. | 225 |
| RERC-A-438-10 | 48" | 36" | 98½" | 71° | 10,000 lb. | 244 |
| RERC-A-3310-10 | 36" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 10,000 lb. | 265 |
| RERC-A-4310-10 | 48" | 36" | 122 ¹⁵ / ₁₆ " | 77° | 10,000 lb. | 289 |
| DOUBLE SIDED PORTABLE REEL RACKS* - (2) SWIVEL & (2) RIGID 6" x 2" GLASS-FILLED NYLON CASTERS | | | | | | |
| RERC-CT-368 | 40" | 72½" | 108" | 71° | 4,000 lb. | 546 |
| RERC-CT-468 | 52½" | 72½" | 108" | 71° | 4,000 lb. | 650 |
| RERC-CT-3610 | 40" | 72½" | 134 ³ / ₈ " | 77° | 4,000 lb. | 614 |
| RERC-CT-4610 | 52 ³ / ₈ " | 72½" | 132 ³ / ₈ " | 77° | 4,000 lb. | 693 |

*COMPLETE UNIT NO ADD-ON SECTIONS AVAILABLE

Economy Wire Reel Caddy

Move wire reels and dispense wire in vertical and horizontal positions. Caddy includes eleven (11) spool bars for handling various size reels. Three (3) large 1-1/6" diameter axles handle 14" maximum reel diameter, while the eight (8) smaller ¾" diameter axles handle 7" maximum reel diameter. Storage tray on top for added versatility. Portable with 6" diameter semi-pneumatic wheels and 43½" high handle. Total uniform capacity is 150 pounds (90 pounds on large spindles and 60 pounds on small spindles). Steel construction with painted finish. Ships knocked down.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | TOTAL UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|--------------------------|------------------------|----------------|
| WIRE-D-E | 17¾" x 19½" x 43⅝" | 150 lb. | 41 |

Wire Reel Caddies

Easily moves wire reels where you need them and dispenses wire in vertical or horizontal positions. Includes four (4) spool bars for handling various size reels. Bottom of caddy includes wire guide holes for quick access. Built-in hand hole for portability. Steel construction with painted finish. Mount to a wall or transport with an optional hand truck. Uniform capacity is 300 pounds.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x L x H) | WEIGHT (POUND) |
|---------------|----------------------------------|--|----------------|
| WIRE-D | STAND-ALONE UNIT | 24" x 16¼" x 44 ³ / ₈ " | 56 |
| WIRE-D-WHK | PORTABLE UNIT (CASTERS & HANDLE) | 29" x 21 ⁷ / ₈ " x 47 ⁵ / ₁₆ " | 90 |
| WIRE-D-SHD-PN | HAND TRUCK (PNEUMATIC WHEELS) | 22" x 19" x 52" | 39 |
| WIRE-D-SHD-HR | HAND TRUCK (HARD RUBBER WHEELS) | 22" x 19" x 52" | 42 |



48 Hours to Ship

model RERC-338




POWDER COATED TOUGH

model RERC-CT-468



48 Hours to Ship

model WIRE-D-E

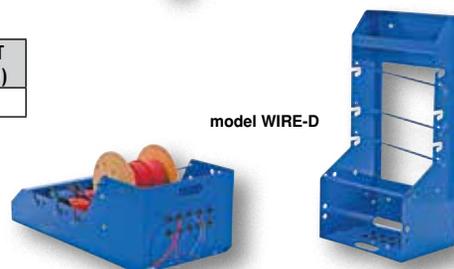

model WIRE-D



Wire reels are not included.

48 Hours to Ship

model WIRE-D-WHK

model WIRE-D-SHD-HR



model VSC-JC-171

Bin Storage Cabinets

Bin Storage Cabinets are designed for high density storage and organization of parts. These cabinets offer easy accessibility to contents while maintaining cleanliness and security. Available in three sizes: 60" wide, 48" wide and 36" wide, each with different configurations of bins and/or shelves. Bins are made of a durable polyethylene with molded-in back hook for secure hanging. Front edges are lowered for better visibility and easier part picking. When not in use bins can be stacked on shelves, worktables, carts, or other flat surfaces. *Back and door feature louvered panels for customized configurations.



Keyed Handle Lock comes standard with models VSC-3501 and VSC-JC.



Padlock Handle comes standard with model VSC-SSC. Padlock is not included.

| MODEL NUMBER | TOTAL BINS | BIN STYLE A QUANTITY | BIN STYLE B QUANTITY | BIN STYLE C QUANTITY | BIN STYLE D QUANTITY | BIN STYLE E QUANTITY | SHELF QUANTITY | OVERALL SIZE (W x L x H) | WEIGHT (POUND) | |
|---------------------|--|----------------------|----------------------|----------------------|----------------------|----------------------|----------------|--------------------------|--|-----|
| VSC-3501-132 | 132 | 48 | 48 | 18 | 12 | 6 | 0 | 36" x 24" x 72" | 400 | |
| VSC-3501-102 | 102 | 48 | 48 | 0 | 0 | 6 | 3 | 36" x 24" x 72" | 425 | |
| VSC-3501-NB | Custom Configurations* | | | | | | | | 36" x 24" x 72" | 300 |
| VSC-JC-171 | 171 | 64 | 64 | 24 | 13 | 6 | 0 | 48" x 24" x 78" | 521 | |
| VSC-JC-137 | 137 | 64 | 64 | 0 | 3 | 6 | 3 | 48" x 24" x 78" | 533 | |
| VSC-JC-NB | Custom Configurations* | | | | | | | | 48" x 24" x 78" | 410 |
| VSC-SSC-227 | 227 | 80 | 90 | 30 | 18 | 9 | 0 | 60" x 24" x 84" | 657 | |
| VSC-SSC-185 | 185 | 80 | 90 | 0 | 6 | 9 | 3 | 60" x 24" x 84" | 874 | |
| VSC-SSC-NB | Custom Configurations* | | | | | | | | 60" x 24" x 84" | 700 |
| HOOK-ON BINS | | | | | | | | | | |
| VSPB-3021 | (A) Sold in 24-pack units. | | | | | | | | 4 ³ / ₁₆ " x 5 ⁷ / ₁₆ " x 3" | 15 |
| VSPB-3022 | (B) Sold in 24-pack units. | | | | | | | | 4 ³ / ₁₆ " x 7 ⁷ / ₁₆ " x 3" | 16 |
| VSPB-3023 | (C) Sold in 12-pack units. | | | | | | | | 5 ¹ / ₂ " x 11 ³ / ₈ " x 5" | 16 |
| VSPB-3024 | (D) Sold in 12-pack units. | | | | | | | | 8 ¹ / ₄ " x 14 ⁵ / ₈ " x 7" | 17 |
| VSPB-3025 | (E) Sold in 6-pack units. | | | | | | | | 16 ³ / ₄ " x 14 ⁵ / ₈ " x 7" | 18 |
| SHELVES | | | | | | | | | | |
| VBSH-6018 | Adjustable Shelves for VSC-SSC series | | | | | | | | 59 ¹ / ₂ " x 16 ³ / ₈ " | 25 |
| VBSH-4818 | Adjustable Shelves for VSC-JC series | | | | | | | | 47 ¹ / ₂ " x 16 ³ / ₈ " | 23 |
| VBSH-3618 | Adjustable Shelves for VSC-3501 series | | | | | | | | 35 ¹ / ₂ " x 16 ³ / ₈ " | 17 |

Wire Cages

Modular system offers security, storage, and safety for many applications. Stackable panel design allows for easy installation and results in a clean finish. Wire partitions can save in inventory costs, are alternatives to modular offices and drywall, and can increase safety. Constructed of 2" x 2" mesh, 10 gauge welded wire with baked-in powder-coated toughness.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|--------------------------|---------------------|--------------------------|----------------|
| HINGED DOOR TYPE | | | |
| WPC-8X8-3NC | 3 SIDED, NO CEILING | 102" x 100" x 101 1/4" | 569 |
| WPC-8X8-4NC | 4 SIDED, NO CEILING | 100" x 100" x 101 1/4" | 671 |
| WPC-8X8-4C | 4 SIDED, W/ CEILING | 100" x 100" x 101 1/4" | 773 |
| WPC-12X12-4NC | 4 SIDED, NO CEILING | 150" x 150" x 101 1/4" | 854 |
| SLIDING DOOR TYPE | | | |
| WPC-10X10-3NC | 3 SIDED, NO CEILING | 124" x 124" x 125 1/4" | 759 |
| WPC-10X10-4NC | 4 SIDED, NO CEILING | 124" x 124" x 125 1/4" | 867 |
| WPC-10X10-4C | 4 SIDED, W/ CEILING | 124" x 124" x 125 1/4" | 1001 |



model WPC-10X10-4C

Driver Cages

Driver Cages are an application that is placed around an entrance in a warehouse. This is used to keep truck driver, and delivery personnel secluded in one place when entering the warehouse or making a delivery. Each driver cage includes a key lock on the driver side (48" side), a push bar on the warehouse side, and a 2' x 1' 8" slide up service window with shelf. Helps prevent people from wandering throughout the warehouse, as well as additional security. Cages consists of rectangular 2" x 1" mesh, 10 gauge wire, with a wet enamel gray finish.


| MODEL NUMBER | USABLE SIZE (W x D) | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|----------------------------|---------------------|--------------------------|----------------|
| 2 SIDED DRIVER CAGE | | | |
| WPC-D-4X4-2 | 48" x 48" | 52" x 54" x 101 1/4" | 521 |
| WPC-D-4X6-2 | 72" x 48" | 78" x 54" x 101 1/4" | 576 |
| WPC-D-4X8-2 | 96" x 48" | 102" x 54" x 101 1/4" | 598 |
| 3 SIDED DRIVER CAGE | | | |
| WPC-D-4X4-3 | 48" x 48" | 52" x 54" x 101 1/4" | 595 |
| WPC-D-4X6-3 | 72" x 48" | 78" x 54" x 101 1/4" | 639 |
| WPC-D-4X8-3 | 96" x 48" | 102" x 54" x 101 1/4" | 677 |



model WPC-D-4X6-3



model
VSL-3624



Visibility Storage Lockers

Visibility lockers provide secure and visible storage for equipment, tools, and other valuable items. Locker sides and front door are made of 8 gauge galvanized welded wire mesh with 1½" x 3" openings. Door has a padlock hasp (padlock not included). Frame is made of 14 gauge 1¼" x 3/8" c-channel. Roof, back, and bottom panels are made of 14 gauge sheet material. Ships fully assembled.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | NUMBER OF SHELVES | WEIGHT (POUND) |
|--------------|--------------------------|-------------------|----------------|
| VSL-3030 | 30" x 30" x 80" | 3 | 268 |
| VSL-3624 | 36" x 24" x 80" | 3 | 266 |
| VSL-3636 | 36" x 36" x 80" | 3 | 290 |



model
JVSL-1818

Storage Lockers

Whether you need this fully welded storage locker for small package pick up, for employee lockers, or evidence storage, you will always have an unrestricted view of the interior. Fully assembled and all welded 3 door heavy duty storage lockers 1 1/4" x 1 1/4" x 1/8" angle framework, 13 gauge shelves, 2" x 1" 10 gauge woven wire mesh sides. Units have 21" between shelves and doors are equipped with separate padlock lugs (Padlock sold separately). 1500 lb. total capacity, 500 lbs per shelf when evenly distributed, unit is painted dark gray. Units are non-returnable.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | SHELVES | WEIGHT (POUND) |
|--------------|--------------------------|---------|----------------|
| JVSL-1818 | 18" x 18" x 75" | 3 | 196 |
| JVSL-2424 | 24" x 24" x 75" | 3 | 244 |
| JVSL-3030 | 30" x 30" x 75" | 3 | 291 |
| JVSL-3636 | 36" x 36" x 75" | 3 | 374 |



48 Hours
to Ship

Easy assembly.
Units set up fast!

Stainless Steel Solid Rivet Shelving

High quality Stainless Steel Solid Shelving is made of type 304 stainless steel construction with brushed finish. Each model includes five (5) adjustable shelves with a uniform capacity of 600 pounds per shelf. The 18 gauge thick shelves are adjustable in 1½" teardrop hole increments. Two (2) piece corner post design includes plastic connectors. Ships knocked down, easy assembly.

| MODEL NUMBER | SHELF SIZE (W x L) | OVERALL HEIGHT | UNIFORM CAPACITY PER SHELF | WEIGHT (POUND) |
|--------------|--------------------|----------------|----------------------------|----------------|
| LWSS-1836 | 18" x 36" | 72" | 600 lb. | 86 |
| LWSS-1848 | 18" x 48" | 72" | 600 lb. | 93 |
| LWSS-2436 | 24" x 36" | 72" | 600 lb. | 91 |
| LWSS-2448 | 24" x 48" | 72" | 600 lb. | 133 |



model SSS-1848

48 Hours
to Ship

Stainless Steel Shelving

Provide easy access to stored items from all sides. High-quality stainless steel (type 304 with a #4 brushed finish) construction is ideal for the commercial or industrial use. Each model includes four (4) set screw adjustable shelves ideal for different height products. Shelves are 18 gauge thick and hold up to 600 pounds each (uniform load). Units ship knocked down and require assembly. Shelving kits include four shelves and hardware.

| MODEL NUMBER | SHELF SIZE (W x L) | OVERALL HEIGHT | UNIFORM CAPACITY PER SHELF | WEIGHT (POUND) |
|--------------------------------------|---------------------------------|----------------|----------------------------|----------------|
| SSS-1836 | 18" x 36" | 74" | 600 lb. | 110 |
| SSS-1848 | 18" x 48" | 74" | 600 lb. | 135 |
| SSS-2436 | 24" x 36" | 74" | 600 lb. | 129 |
| SSS-2448 | 24" x 48" | 74" | 600 lb. | 165 |
| STAINLESS STEEL SHELVING KITS | | | | |
| SSS-1836-SK | 18" x 36" | -- | 600 lb. | 70 |
| SSS-1848-SK | 18" x 48" | -- | 600 lb. | 95 |
| SSS-2436-SK | 24" x 36" | -- | 600 lb. | 89 |
| SSS-2448-SK | 24" x 48" | -- | 600 lb. | 101 |
| STAINLESS STEEL LEG KIT | | | | |
| SSS-LGK | INCLUDES FOUR LEGS/CORNER POSTS | | | 12 |



model SSS-1836-SK

Powder Coated Boltless Shelving

Boltless design ensures fast assembly and adjustment while the textured powder coat surface resists rust and scratches. Each model includes five adjustable 17 gauge industrial strength steel shelves. Shelf heights are adjustable in 1½" increments. Unit features four sided access. Units ship knocked down.



Easy assembly.
Units set up fast!

48 Hours
to Ship




| MODEL NUMBER | OVERALL SIZE (W x L x H) | UNIFORM CAPACITY PER SHELF | TOTAL UNIT CAPACITY | WEIGHT (POUND) |
|--------------|--------------------------|----------------------------|---------------------|----------------|
| PCBS-1836 | 18" x 36" x 72¼" | 600 lb. | 2,000 lb. | 110 |
| PCBS-1848 | 18" x 48" x 72¼" | 600 lb. | 2,000 lb. | 120 |
| PCBS-2436 | 24" x 36" x 72¼" | 450 lb. | 2,000 lb. | 116 |
| PCBS-2448 | 24" x 48" x 72¼" | 450 lb. | 2,000 lb. | 135 |

Plastic Bulk Shelving & Storage

Largest all-purpose industrial-grade plastic shelving system in the industry. Our unique leg stacker system lets you choose whether to build up, out, or both. Our rigid high-density polyethylene panels are a stout 2⅝" thick with a grid top that allows liquids to flow through, promotes air circulation, and prevents dust build up. Optional drip trays available for different applications. Drip trays hold up to 2.5 gallons. The entire system is chemically resistant, making it an ideal choice for HAZMAT storage or any other applications, corrosive or not.

| MAX TRAYS PER SHELF SYSTEM (24" DEEP) | |
|---------------------------------------|------------------------|
| SHELVING DIM. | NO. OF TRAYS PER SHELF |
| 36"W x 24"L x 51"H | 3 |
| 66"W x 24"L x 51"H | 6 |
| 96"W x 24"L x 51"H | 9 |
| 36"W x 24"L x 75"H | 4 |
| 66"W x 24"L x 75"H | 8 |
| 96"W x 24"L x 75"H | 12 |

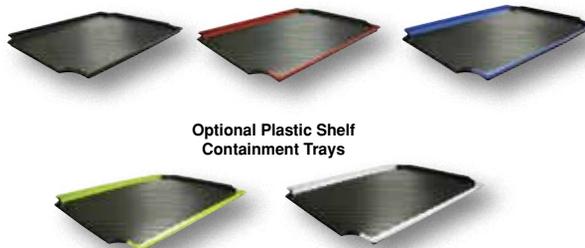

Optional Plastic Shelf Containment Trays



model PBSS-9624-4

| MODEL NUMBER | NUMBER OF SHELVES | SHELF SIZE (W x L) | OVERALL HEIGHT | TOTAL UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|-------------------|--------------------|----------------|------------------------|----------------|
| PBSS-3616-3 | 3 | 36" x 16" | 51" | 500 lb. | 37 |
| PBSS-3624-3 | 3 | 36" x 24" | 51" | 750 lb. | 44 |
| PBSS-6624-3 | 3 | 66" x 24" | 51" | 1,390 lb. | 107 |
| PBSS-9624-3 | 3 | 96" x 24" | 51" | 2,025 lb. | 128 |
| PBSS-3616-4 | 4 | 36" x 16" | 75" | 675 lb. | 50 |
| PBSS-3624-4 | 4 | 36" x 24" | 75" | 1,000 lb. | 64 |
| PBSS-6624-4 | 4 | 66" x 24" | 75" | 1,850 lb. | 174 |
| PBSS-9624-4 | 4 | 96" x 24" | 75" | 2,700 lb. | 180 |

OPTIONAL PLASTIC SHELF CONTAINMENT TRAYS

| | | |
|------------|---------------------------------------|---|
| PBSS-BKTRY | GENERAL STORAGE (COLOR: BLACK) | 5 |
| PBSS-RDTRY | FLAMMABLES (COLOR: RED) | 5 |
| PBSS-BLTRY | HEALTH HAZARDS / TOXINS (COLOR: BLUE) | 5 |
| PBSS-YLTRY | REACTIVES/OXIDIZERS (COLOR: YELLOW) | 5 |
| PBSS-WTTRY | CONTACT HAZARDS (COLOR: WHITE) | 5 |



model PBSS-6624-4
with Optional Yellow Plastic
Shelf Containment Tray
model PBSS-YLTRY

model
WBT-S-6624model
WBT-G-4824

Plastic Work Benches

Easy up, easy down, and two easy ways to change them around! Our Work-Bench™ can be set up in minutes to create an instant temporary or permanent island of productivity within any warehouse manufacturing floor or office environment. Pick from four sizes to fit virtually any need. Our original grid-top is ideal when work produces small scrap that can clutter work surfaces. Choose our solid top panel option for tough jobs that require a clean, flat work surface.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | TOTAL UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|-----------------------|--------------------------|------------------------|----------------|
| WBT-S-3624 | SOLID TOP/SOLID LOWER | 36" x 24" x 36" | 580 lb. | 34 |
| WBT-S-4824 | SOLID TOP/SOLID LOWER | 48" x 24" x 36" | 785 lb. | 43 |
| WBT-S-6624 | SOLID TOP/SOLID LOWER | 66" x 24" x 36" | 1,070 lb. | 57 |
| WBT-S-9624 | SOLID TOP/SOLID LOWER | 96" x 24" x 36" | 1,555 lb. | 81 |
| WBT-G-3624 | GRID TOP/GRID LOWER | 36" x 24" x 36" | 500 lb. | 39 |
| WBT-G-4824 | GRID TOP/GRID LOWER | 48" x 24" x 36" | 688 lb. | 39 |
| WBT-G-6624 | GRID TOP/GRID LOWER | 66" x 24" x 36" | 925 lb. | 48 |
| WBT-G-9624 | GRID TOP/GRID LOWER | 96" x 24" x 36" | 1,350 lb. | 70 |



model DRP-V-4824



model DRP-S-3636

Dunnage Racks

Choose between our original vented grid-top Dunnage-Rack™ or its solid-top twin, available in all the same sizes and configurations. Dunnage-Racks™ are made tough with strong, durable, high-density polyethylene. They are waterproof and resistant to gas, solvents, and most industrial chemicals. Just push in the included legs and Dunnage-Rack™ will go to work immediately, no tools required!

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|-------------|--------------------------|------------------|----------------|
| DRP-V-3624 | VENTED TOP | 36" x 24" x 12" | 500 lb. | 13 |
| DRP-V-3636 | VENTED TOP | 36" x 36" x 12" | 750 lb. | 22 |
| DRP-V-4824 | VENTED TOP | 48" x 24" x 12" | 700 lb. | 19 |
| DRP-V-6624 | VENTED TOP | 66" x 24" x 12" | 1000 lb. | 23 |
| DRP-V-6636 | VENTED TOP | 66" x 36" x 12" | 1500 lb. | 37 |
| DRP-V-9624 | VENTED TOP | 96" x 24" x 12" | 1400 lb. | 34 |
| DRP-V-9636 | VENTED TOP | 96" x 36" x 12" | 2000 lb. | 53 |
| DRP-S-3624 | SOLID TOP | 36" x 24" x 12" | 700 lb. | 17 |
| DRP-S-3636 | SOLID TOP | 36" x 36" x 12" | 1000 lb. | 26 |
| DRP-S-4824 | SOLID TOP | 48" x 24" x 12" | 900 lb. | 21 |
| DRP-S-6624 | SOLID TOP | 66" x 24" x 12" | 1400 lb. | 28 |
| DRP-S-6636 | SOLID TOP | 66" x 36" x 12" | 1900 lb. | 49 |
| DRP-S-9624 | SOLID TOP | 96" x 24" x 12" | 1800 lb. | 41 |
| DRP-S-9636 | SOLID TOP | 96" x 36" x 12" | 2700 lb. | 64 |

model UBX-Y-NW



model UBX-Y-W

Utility Boxes

These versatile utility boxes can be used for spill kits, storage bins, and much more. Forklift accessible, able to be locked, and has a heavy-duty double walled lid, which is sloped to shed moisture. Model UBX-Y-W rolls smoothly on 5" solid rubber wheels. Units are also available in forest green and orange, contact factory for pricing.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | UNIFORM CUBIC FEET CAPACITY | UNIFORM LOAD CAPACITY | WEIGHT (POUND) |
|--------------|-------------|--------------------------|-----------------------------|-----------------------|----------------|
| UBX-Y-NW | NO WHEELS | 48"W x 31"D x 31½"H | 15 | 400 lb. | 60 |
| UBX-Y-W | 5" WHEELS | 48"W x 31"D x 38"H | 15 | 400 lb. | 68 |



48 Hours
to Ship



Folding Container

Folding Container requires minimum storage space when not in use. Units feature lightweight construction for easy transport. Constructed of plastic material for economical and resourceful use. Uniform capacity is 500 pounds.

| MODEL NUMBER | OUTSIDE DIMENSIONS (W x D x H) | FOLDED HEIGHT | WEIGHT (POUND) |
|--------------|--------------------------------|---------------|----------------|
| F-CRATE | 23½" x 18⅜" x 12⅞" | 3½" | 9 |

Aluminum Storage Cases

Nestable Aluminum Storage Cases keep contents clean and dry. Dual lock and hasps offer extra security. Durable and attractive embossed surface with caps on each corner to minimize damage. For storage use only. Not recommended for shipping or transportation of goods.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | UNIFORM CAPACITY | WEIGHT (POUND) |
|---------------------|---------------------|--------------------------|------------------|----------------|
| CASE-L [®] | LARGE STORAGE CASE | 24" x 18" x 20" | 33 lb. | 21 |
| CASE-M [®] | MEDIUM STORAGE CASE | 21½" x 16¼" x 19¼" | 33 lb. | 20 |
| CASE-S [®] | SMALL STORAGE CASE | 19" x 14¼" x 16¼" | 33 lb. | 16 |
| CASE-A [®] | SET OF THREE CASES | -- | -- | 57 |



model CASE-S



model CASE-M



model CASE-L

Aluminum Tool Cases

Rugged textured aluminum storage cases with rounded corners. Lid interior includes removable panel with 13 storage pouches and 4 sleeves. Lower storage area includes segmented walls and adjustable panels in 1/4" increments. Molded plastic carrying handle. Includes removable shoulder strap. Quality locking latches included with two keys. Uniform capacity is 40 pounds. CASE-1814-FM includes a foam insert.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|---------------------------|--------------------|--------------------------|----------------|
| CASE-1814 [®] | ALUMINUM TOOL CASE | 18" x 14" x 6" | 7 |
| CASE-1814-FM [®] | ALUMINUM TOOL CASE | 18" x 14" x 6" | 8 |



model CASE-1814



model CASE-1814-FM

Storage Cases

Heavy-duty aluminum framed storage cases feature panel inserts and reinforced rounded corners. Telescopic handle and wheels for convenient portability. Units are to be used for storage and/or transport of goods by hand - not recommended for use as containers for the shipment or transportation of goods. Uniform capacity is 33 pounds evenly distributed by the handle and 44 pounds evenly distributed by the wheels.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x L x H) | USABLE SIZE (W x L x H) | WEIGHT (POUND) |
|----------------------|---------------|--|-------------------------|----------------|
| CASE-F [®] | CARRYING CASE | 11" x 18" x 9" | 12" x 8" x 9" | 9 |
| CASE-EH [®] | PILOT CASE | 8" x 16¾" x 16" | 17" x 7¼" x 12½" | 10 |
| CASE-SH [®] | PILOT CASE | 16" x 10" x 18 ⁷ / ₈ " | 18" x 8" x 13" | 9 |



model CASE-F



model CASE-EH



model CASE-SH

Fiberglass Storage Cases

These lockable Fiberglass Storage Cases are constructed of heavy-duty white fiberglass with an off-white interior finish. Cases are perfect for storage of hundreds of items. UV gel coat topcoat provides long-lasting protection and prevents fading. Gas cylinders are included to help lift the lid and prevent the lid from over-rotating and damaging the hinges. The hinges are stainless steel piano hinges attached with adhesive and rust-proof rivets. Fiberglass nominal thickness is 3/16". Latch shackle thickness is 5/16".

| MODEL NUMBER | OVERALL SIZE (W x L x H) | INSIDE VOLUME (CUBIC FEET) | WEIGHT (POUND) |
|-----------------------|--------------------------|----------------------------|----------------|
| FCASE-48 [®] | 48" x 20" x 18" | 10 | 82 |
| FCASE-60 [®] | 60" x 20" x 18" | 12½ | 106 |
| FCASE-72 [®] | 72" x 20" x 18" | 15 | 114 |



model FCASE-48



model FCASE-60



model MULTI-C

48 Hours
to Ship

Multi-Height Container

Increase flexibility and accessibility with our Multi-Height Container. As the user loads or unloads the height can be increased or decreased. Includes one pallet base (with four way entry) and four side sections. Pallet base measures 47³/₁₆"W x 31³/₈"L x 5⁷/₈"H with fork openings: 8⁵/₁₆"W x 3⁷/₈"H on 14¹/₈" centers and 13¹/₈"W x 3⁷/₈"H on 19" centers. Polyethylene construction with steel corner hinges. Multiple units are not stackable.

| MODEL NUMBER | OVERALL SIZE (W x D x H) | FOLDED SECTION (W x D x H) | UNIFORM CAPACITY | WEIGHT (POUND) |
|--------------|--|--|------------------|----------------|
| MULTI-CⓈ | 47 ¹ / ₄ " x 31 ¹ / ₂ " x 37 ¹ / ₂ " | 74 ¹ / ₂ " x 8 ³ / ₄ " x 2 ³ / ₄ " | 2,500 lb. | 126 |



48 Hours
to Ship

CA Residents see
WARNING A, Pg. 459

Wire Containers

All steel construction with galvanized welded wire mesh. Corners have eyelets designed for rigidity and stacking. Legs are wrapped and welded around base to eliminate sharp edges. Containers can be stacked four (4) high and have a 4" clearance underneath to allow movement by fork or pallet trucks. Containers front half drop gate allows speed loading and access to stored goods. The collapsible design allows for efficient storage and transportation.

| MODEL NUMBER | UNIFORM CAPACITY | OVERALL SIZE (W x D x H) | MESH WIRE GAUGE | MESH OPENING | WEIGHT (POUND) |
|--------------|------------------|--------------------------|-----------------|--------------|----------------|
| VWIRE-32HⓈ | 1,000 lb. | 20" x 32" x 21" | 11 | 1/2" x 1/2" | 57 |
| VWIRE-40HⓈ | 4,000 lb. | 32" x 40" x 34" | 3 | 2" x 2" | 115 |
| VWIRE-48HⓈ | 4,000 lb. | 40" x 48" x 42" | 3 | 2" x 2" | 166 |




model CBC-4048-S

48 Hours
to Ship

Collapsible Bulk Storage Containers

These rugged containers will fold flat for storage when not needed. Overall height when folded flat is only 11". Two-way fork entry openings are 33³/₄"W x 3³/₄"H. Uniform volume capacity is 26 cu-ft. Multiple units may be stacked up to three (3) high. Resistant to extreme high and low temperatures. Durable and easy to clean. Manufactured from HDPE.

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x L x H) | UNIFORM CAPACITY | | | WEIGHT (LB.) |
|--------------|-------------|--------------------------|------------------|-----------|-----------|--------------|
| | | | STATIC | DYNAMIC | STACKING | |
| CBC-4048-SⓈ | SOLID SIDES | 46" x 46" x 31" | 6,000 lb. | 2,000 lb. | 1,000 lb. | 142 |
| CBC-4048-MⓈ | MESH SIDES | 46" x 46" x 31" | 6,000 lb. | 2,000 lb. | 1,000 lb. | 144 |

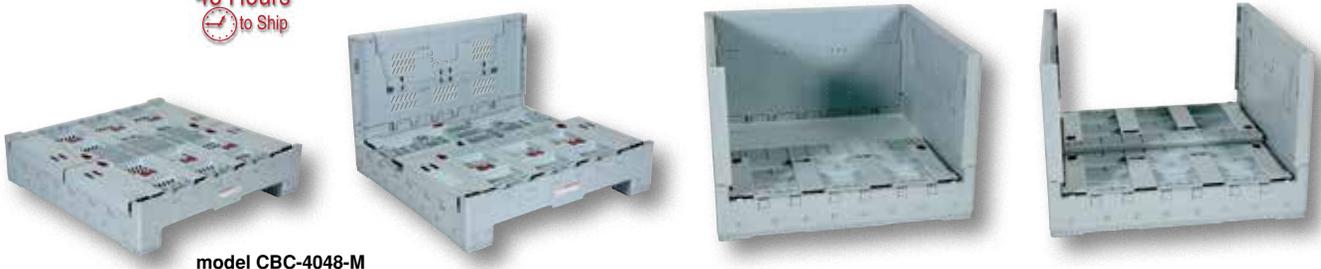

model CBC-4048-M

Aluminum Tread Plate Portable Tool Boxes

Secure your tools and other belongings from theft with our Portable Tool Boxes. Safety double hinged hasp for padlock securing, accepts padlocks with a shackle diameter no greater than 7/16". Padlock is not included. Constructed of 1/8" thick diamond tread plate material. Features two sturdy handles for transporting. Uniform capacity is 2,500 pounds. Fork pocket centers are 24", except for APTS-2436 models are 12".



model APTS-3060



| MODEL NUMBER | OVERALL SIZE (W x D x H) | USABLE SIZE (W x D x H) | WEIGHT (POUND) |
|--|--|-------------------------|----------------|
| STANDARD | | | |
| APTS-2436 | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 36" x 24" x 24" | 105 |
| APTS-2448 | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 48" x 24" x 24" | 119 |
| APTS-3648 | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 37 ¹ / ₁₆ " | 48" x 24" x 36" | 147 |
| APTS-2460 | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 60" x 24" x 24" | 137 |
| APTS-3060 | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 31 ¹ / ₁₆ " | 60" x 24" x 30" | 152 |
| APTS-3660 | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 37 ¹ / ₁₆ " | 60" x 24" x 36" | 165 |
| WITH CASTERS (5" x 2") | | | |
| APTS-2436-C | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 36" x 24" x 24" | 132 |
| APTS-2448-C | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 48" x 24" x 24" | 144 |
| APTS-3648-C | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ¹¹ / ₁₆ " | 48" x 24" x 36" | 170 |
| APTS-2460-C | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ³ / ₄ " | 60" x 24" x 24" | 162 |
| APTS-3060-C | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 38 ³ / ₄ " | 60" x 24" x 30" | 176 |
| APTS-3660-C | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ³ / ₄ " | 60" x 24" x 36" | 190 |
| WITH FORK POCKETS (7-1/2" x 2-1/2") | | | |
| APTS-2436-F | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 36" x 24" x 24" | 110 |
| APTS-2448-F | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 48" x 24" x 24" | 122 |
| APTS-3648-F | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹ / ₁₆ " | 48" x 24" x 36" | 152 |
| APTS-2460-F | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 60" x 24" x 24" | 145 |
| APTS-3060-F | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 34 ¹ / ₁₆ " | 60" x 24" x 30" | 154 |
| APTS-3660-F | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹ / ₁₆ " | 60" x 24" x 36" | 168 |
| WITH CASTERS AND FORK POCKETS | | | |
| APTS-2448-CF | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ³ / ₄ " | 48" x 24" x 24" | 147 |
| APTS-3648-CF | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ³ / ₄ " | 48" x 24" x 36" | 173 |
| APTS-2460-CF | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ³ / ₄ " | 60" x 24" x 24" | 165 |
| APTS-3060-CF | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 38 ³ / ₄ " | 60" x 24" x 30" | 179 |
| APTS-3660-CF | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹ / ₁₆ " | 60" x 24" x 36" | 193 |

| TOOL BOXES WITH FOLD-DOWN FRONT DOORS | | | |
|--|--|---|----------------|
| MODEL NUMBER | OVERALL SIZE (W x D x H) | DOOR SIZE (W x H) | WEIGHT (POUND) |
| STANDARD | | | |
| APTS-2436-FD | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 24 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 105 |
| APTS-2448-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 37 ¹ / ₁₆ " | 36 ⁷ / ₈ " x 12 ¹ / ₄ " | 119 |
| APTS-3648-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 36 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 147 |
| APTS-2460-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 25 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 137 |
| APTS-3060-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 31 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 152 |
| APTS-3660-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 37 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 165 |
| WITH CASTERS (5" x 2") | | | |
| APTS-2436-C-FD | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 24 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 132 |
| APTS-2448-C-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 36 ⁷ / ₈ " x 12 ¹ / ₄ " | 144 |
| APTS-3648-C-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ¹¹ / ₁₆ " | 36 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 179 |
| APTS-2460-C-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 172 |
| APTS-3060-C-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 38 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 165 |
| APTS-3660-C-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 192 |
| WITH FORK POCKETS (7-1/2" x 2-1/2") | | | |
| APTS-2436-F-FD | 37 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 24 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 110 |
| APTS-2448-F-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 36 ⁷ / ₈ " x 12 ¹ / ₄ " | 122 |
| APTS-3648-F-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹ / ₁₆ " | 36 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 152 |
| APTS-2460-F-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 28 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 145 |
| APTS-3060-F-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 34 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 138 |
| APTS-3660-F-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 165 |
| WITH CASTERS AND FORK POCKETS | | | |
| APTS-2448-CF-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 36 ⁷ / ₈ " x 12 ¹ / ₄ " | 154 |
| APTS-3648-CF-FD | 49 ¹ / ₄ " x 25 ⁷ / ₈ " x 44 ¹¹ / ₁₆ " | 36 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 189 |
| APTS-2460-CF-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 32 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 182 |
| APTS-3060-CF-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 38 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 12 ¹ / ₄ " | 175 |
| APTS-3660-CF-FD | 61 ¹ / ₄ " x 25 ⁷ / ₈ " x 40 ¹¹ / ₁₆ " | 48 ¹³ / ₁₆ " x 18 ¹ / ₄ " | 202 |




model APTS-3060-CF-FD





model
STOR-96-G-W-1-RH



Storage Buildings

Modular Storage Buildings are ideal for keeping valuable items secure. Constructed of maintenance free galvanized corrugated paneling. The door measures 45"W x 74"H usable and features a right-side hinged lock (padlock not included). Modular design is easy to assemble. Once assembled unit can be moved with a fork lift. Each unit features a wooden floor 5¾" high to help keep products dry. Built-in rain gutters for water drainage is standard.

| MODEL NUMBER | DEPTH | OVERALL SIZE (W x D x H) | USABLE SIZE (W x D x H) | WEIGHT (POUND) |
|------------------|--------|--|---|----------------|
| STOR-96-G-W-1RH | SINGLE | 109 ³ / ₁₆ " x 76½" x 84¾" | 104¾" x 69¾" x 77 ⁷ / ₁₆ " | 1010 |
| STOR-912-G-W-1RH | DOUBLE | 109½" x 152 ¹³ / ₁₆ " x 84 ¹³ / ₁₆ " | 104¾" x 145¾" x 77 ⁷ / ₁₆ " | 1768 |



model
STOR-912-G-W-1-RH

Utility Steel Storage Sheds

Utility Steel Storage Sheds are used for holding all kinds of materials or tools. The hinged door provides access to shed and the slanted roof helps with rain run-off. The shed has an open floor design (floor is not included) and a lockable door latch (padlock not included). Unit has a zinc-plated finish that prevents rust. The easy to assemble design ships knock-down with installation instructions and hardware included. Model SHED-5932-F has a front opening door design that enables the shed to be used in spacious areas, while model SHED-5932 includes a side door design for use in long narrow spaces.



model SHED-5932



model SHED-5932-F

| MODEL NUMBER | SIDE OF BUILDING THE DOOR OPENS | OVERALL SIZE (W x D x H) | USABLE SIZE (W x H) | WEIGHT (POUND) |
|--------------|---------------------------------|--------------------------|---------------------|----------------|
| SHED-5932 | SIDE | 60" x 33¾" x 79½" | 57" x 75" | 128 |
| SHED-5932-F | FRONT | 60" x 33¾" x 79½" | 57" x 75" | 137 |



model MDS-96-DR
72"W x 83"H &
36"W x 83"H DOORS



Multi-Duty Storage Buildings

Constructed of heavy duty steel these Multi-Duty Storage Buildings stand up in multiple weather conditions; rain, sleet, and snow. The 18 gauge steel roof is contoured for water drainage and will hold snow up to 45 lb./sq-foot. The sides are constructed of 28 gauge steel siding. Usable size 109¼"W x 75¼"D x 80"H. Lag down plates are included for securing unit to the concrete. Ships knocked down, assembly required.

model MDS-96-BK
INCLUDES STEEL
BICYCLE RACK



model
MDS-96-SM

| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|--------------|--|---|----------------|
| MDS-96-DR | SHELTER WITH DOORS | 120" x 95½" x 90 ¹ / ₁₆ " | 1080 |
| MDS-96-SM | SMOKERS SHELTER | 120" x 95½" x 90 ¹ / ₁₆ " | 1000 |
| MDS-96-BK | BICYCLE STORAGE SHELTER | 120" x 95½" x 90 ¹ / ₁₆ " | 927 |
| AS-125 | ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5½" | | 1 |
| AS-125-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5½" | | 4 |

Smoking Shelter / Bus Stop

Shelters feature rugged welded steel construction for strength and durability. Side panels are constructed of semi-clear polycarbonate. The top is made from corrugated polycarbonate sheet with a silver baked-in powder coated toughness. Mounting plates included. Heating options available for those cold weather applications, contact factory. Ships knocked down, assembly required.



model SSH-7939-80

| MODEL NUMBER | USABLE SIZE (W x D x H) | OVERALL SIZE (W x D x H) | WEIGHT (POUND) |
|--------------|---|--|----------------|
| SSH-7939-80 | 69¾" x 37½" x 77 ³ / ₁₆ " | 76¼" x 49 ⁵ / ₁₆ " x 83 ⁹ / ₁₆ " | 270 |
| AS-125 | ANCHOR BOLTS FOR CONCRETE (1) 1/2" x 5½" | | 1 |
| AS-125-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 5½" | | 4 |



LunarGlo LED Light - Option for storage sheds and shelters

An American made solar light unit that has the ability to provide up to 80 hours of light on a single charge. This LunarGlo LED light is designed to function even in the toughest of weather conditions. LunarGlo provides light to insure the safety of those folks taking a smoke break or waiting for a taxi or mass transit.

- Made in the USA • 4 Ultra Bright LED Bulbs • 12 Month Warranty • Up to 80 hours of constant light • Non-dimming • Contains Lithium Ion Battery • No Moving Parts • Provides Patron Security • Powered by the sun • Easy to install



model LGL-LED



| MODEL NUMBER | DESCRIPTION | OVERALL SIZE (W x L x H) | BULB TYPE | WEIGHT (POUND) |
|--------------|-------------|---|-----------|----------------|
| LGL-LED | ROOF LIGHT | 5 ⁵ / ₈ " x 5 ⁵ / ₈ " x 3 ¹ / ₈ " | LED | 3 |

Aluminum Smokers Bollard

Manufactured from aluminum alloy for an attractive finish. Includes internal storage container for holding cigarettes. Easy to empty design. Floor-mounted unit includes four (4) pre-drilled mounting holes. Wall mounted unit includes hardware.

| MODEL NUMBER | DESCRIPTION | HEIGHT | OUTSIDE DIAMETER | WEIGHT (POUND) |
|--------------|---|--------|---------------------------------|----------------|
| SMK-F-35A | FLOOR MOUNTED | 35" | 3 ¹ / ₄ " | 13 |
| SMK-W-19A | WALL MOUNTED | 19" | 3 ¹ / ₄ " | 4 |
| AS-124-4PK | ANCHOR BOLTS FOR CONCRETE (4) 1/2" x 4" | | | 4 |



model SMK-F-35A




48 Hours to Ship

model SMK-W-19A

Bicycle Racks

Our Bicycle Racks make it easy to store bikes where space is at a premium. Welded steel units feature eight (8) mounting flanges with pre-drilled 7/16" holes for easy mounting with the exception of model numbers BR-GL-BK and BR-GL-G which has two (2) 3/4" mounting holes. Hardware is sold separately. Racks are shipped fully-assembled and ready to use. Available in a powder coat black or galvanized finish. Other powder coat finishes are available. Please contact factory.

| MODEL NUMBER | BIKE CAPACITY | MOUNTING STYLE | OVERALL SIZE (W x L x H) | WEIGHT (POUND) |
|---------------------------------|--|----------------|---|----------------|
| BLACK POWDER COAT FINISH | | | | |
| BR-L2-BK | 5 | GROUND | 4" x 31" x 36" | 25 |
| BR-L3-BK | 7 | GROUND | 4" x 49" x 36" | 36 |
| BR-ST-BK | 2 | GROUND | 20" x 38 ⁵ / ₁₆ " x 26 ¹ / ₂ " | 31 |
| BR-M3S-BK | 3 | GROUND | 13 ¹³ / ₁₆ " x 45 ⁷ / ₈ " x 14 ⁹ / ₁₆ " | 31 |
| BR-M3D-BK | 6 | GROUND | 27 ¹ / ₄ " x 42" x 14 ⁹ / ₁₆ " | 53 |
| BR-M3S-W-BK | 3 | WALL | 12 ⁷ / ₈ " x 40 ³ / ₈ " x 4 ¹ / ₁₆ " | 23 |
| BR-GL-BK | 4 | GROUND | 5 ⁵ / ₁₆ " x 12 ³ / ₄ " x 22 ¹ / ₂ " | 22 |
| GALVANIZED FINISH | | | | |
| BR-L2-GAL | 5 | GROUND | 4" x 31" x 36" | 25 |
| BR-L3-GAL | 7 | GROUND | 4" x 49" x 36" | 36 |
| BR-ST-GAL | 2 | GROUND | 20" x 38 ⁵ / ₁₆ " x 26 ¹ / ₂ " | 31 |
| BR-M3S-GAL | 3 | GROUND | 13 ¹³ / ₁₆ " x 45 ⁷ / ₈ " x 14 ⁹ / ₁₆ " | 31 |
| BR-M3D-GAL | 6 | GROUND | 27 ³ / ₁₆ " x 42" x 14 ⁹ / ₁₆ " | 53 |
| BR-M3S-W-GAL | 3 | WALL | 12 ⁷ / ₈ " x 40 ³ / ₈ " x 4 ¹ / ₁₆ " | 23 |
| BR-GL-G | 4 | GROUND | 5 ⁵ / ₁₆ " x 12 ³ / ₄ " x 22 ¹ / ₂ " | 22 |
| AS-383 | 3/8" x 3"L CONCRETE ANCHOR (Sold Each) for 7/16" holes | | | 1 |
| AS-584 | 5/8" x 4"L CONCRETE ANCHOR (Sold Each) for 3/4" holes | | | 1 |



model BR-L3-GAL

48 Hours to Ship



CA Residents see WARNING A, Pg. 459



model BR-L2-BK



model BR-ST-BK



model BR-M3S-BK

| SPECIAL POWDER COAT FINISH OPTIONS | | | |
|------------------------------------|----------------------|--|--|
| ERGO BLUE | SODA RED | | |
| SKY BLUE | BUBBLE GUM | | |
| SILVER LINING | CITRUS ORANGE | | |
| MACHINE GRAY | YELLOW | | |
| BATTLESHIP GRAY | HUNTER GREEN | | |
| BROWN | TRACTOR GREEN | | |
| KHAKI TAN | SNOWY WHITE | | |
| SANDY BEIGE | LIQUID ENAMEL PRIMER | | |



model BR-GL-G



model BR-M3S-W-BK



model BR-M3D-BK



Complete and return this form to the factory or your distributor.

A professional will evaluate your needs and provide you with more information.

RBG RACK BACK GUARD SURVEY SHEET

CUSTOMER INFORMATION

CONTACT: _____
 COMPANY: _____
 PHONE: _____
 EMAIL: _____



**VESTIL
MANUFACTURING**
 P.O. BOX 507
 ANGOLA, IN 46703
 Ph: 260-665-7586
 Fax: 260-665-1339

www.vestil.com
 info@vestil.com

Is this a repeat quote or repeat order? If yes, please indicate.
 Prev. Quote No.: _____ Prev. Order No.: _____

REQUESTED DIMENSIONS

| | | |
|----------|---|--|
| A | BEAM WIDTH BETWEEN RACK UPRIGHTS | |
| B | UPRIGHT WIDTH | |
| C | OVERALL NUMBER OF BAYS | |
| D | REQUIRED OFFSET DIMENSION FROM UPRIGHT TO PANEL. (To allow for pallet overhang) | |
| E | MOUNTING HEIGHT ABOVE FLOOR (If not flush-to-floor) | |
| F | OVERALL HEIGHT OF RACK UPRIGHTS | |
| G | DESIRED BACKING HEIGHT | |

PLEASE INCLUDE THE FOLLOWING:

RACK MANUFACTURER: _____
 MODEL NUMBER: _____

ADDITIONAL INFORMATION

NOTES:
